

Is Now Part of



# **ON Semiconductor**®

# To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="https://www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="https://www.onsemi.com">Fairchild\_questions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized applications, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an ad experson

December 2012




# KA75330 Voltage Detector

## Features

- Detects Against Error Operations at Power On/Off
- Resets Function for Low-Voltage Microprocessor
- Checks Low-Battery

# Description


The KA75330 prevents the system error where the supply voltage is below the normal level at the time when the power is on and instantaneous power off in systems.



# **Ordering Information**

Part Number	Operating Temperature Range	Top Mark	Package	Packing Method
KA75330ZTA	-25 ~ +85°C	KA75330	TO-92	Ammo

## **Block Diagram**

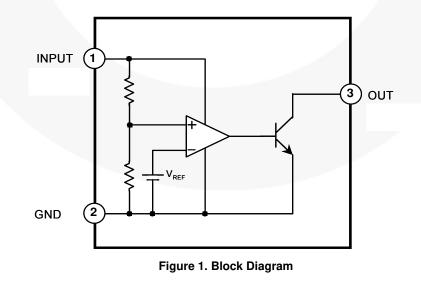

# **Absolute Maximum Ratings**


Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at  $T_A = 25^{\circ}$ C unless otherwise noted.

Symbol	Parameter	Value	Unit
V <sub>CC</sub>	Supply Voltage	0.3 ~ +15.0	V
V <sub>DET</sub>	Detecting Voltage	3.3	V
V <sub>HYS</sub>	Hysteresis Voltage	50	mV
T <sub>OPR</sub>	Operating Temperature	-25 ~ +85	°C
T <sub>STG</sub>	Storage Temperature	-50 ~ +150	°C
PD	Power Dissipation (TO-92)	200	mW
DV <sub>DET</sub> /DT	Detecting Voltage Temperature Coefficient	R <sub>L</sub> = 200 Ω,+0.01	%/°C


# **Electrical Characteristics**

Values are at  $T_A = 25^{\circ}C$  unless otherwise noted.

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
V <sub>DET</sub>	Detecting Voltage	$R_L$ = 200 Ω, $V_{OL}$ ≤ 0.4 V	3.15	3.30	3.45	V
V <sub>OL</sub>	Low Output Voltage	R <sub>L</sub> = 200 Ω			0.4	V
I <sub>LKG</sub>	Output Leakage Current	V <sub>CC</sub> = 15 V			0.1	μA
V <sub>HYS</sub>	Hysteresis Voltage	R <sub>L</sub> = 200 Ω	30	50	100	mV
DV <sub>DET</sub> /DT	Detecting Voltage Temperature Coefficient	R <sub>L</sub> = 200 Ω		±0.01		%/°C
I <sub>CCL</sub>	Circuit Current (At On Time)	V <sub>CC</sub> = V <sub>DET(MIN)</sub> - 0.05 V		300	500	μA
I <sub>CCH</sub>	Circuit Current (At Off Time)	V <sub>CC</sub> = 5.25 V		30	50	μA
V <sub>TH(OPR)</sub>	Threshold Operating Voltage	$R_L = 200 \Omega, V_{OL} \le 0.4 V$		0.8	1.0	V
t <sub>OL</sub>	" L" ± Transmission Delay	$R_L$ = 1.0 kΩ, $C_L$ = 100 pF	0.6	10		μs
t <sub>OH</sub>	" H" ± Transmission Delay	$R_L$ = 1.0 kΩ, $C_L$ = 100 pF		15	20	μs
I <sub>OLI</sub>	Output Current (At On Time)	$V_{CC} = V_{DET(MIN)} - 0.05 V,$ $T_A = 25^{\circ}C$	10	20	30	mA
I <sub>OLII</sub>	Output Current (At On Time)	$V_{CC} = V_{DET(MIN)} - 0.05 V,$ $T_A = -25 \sim +85^{\circ}C$	8	16	30	mA

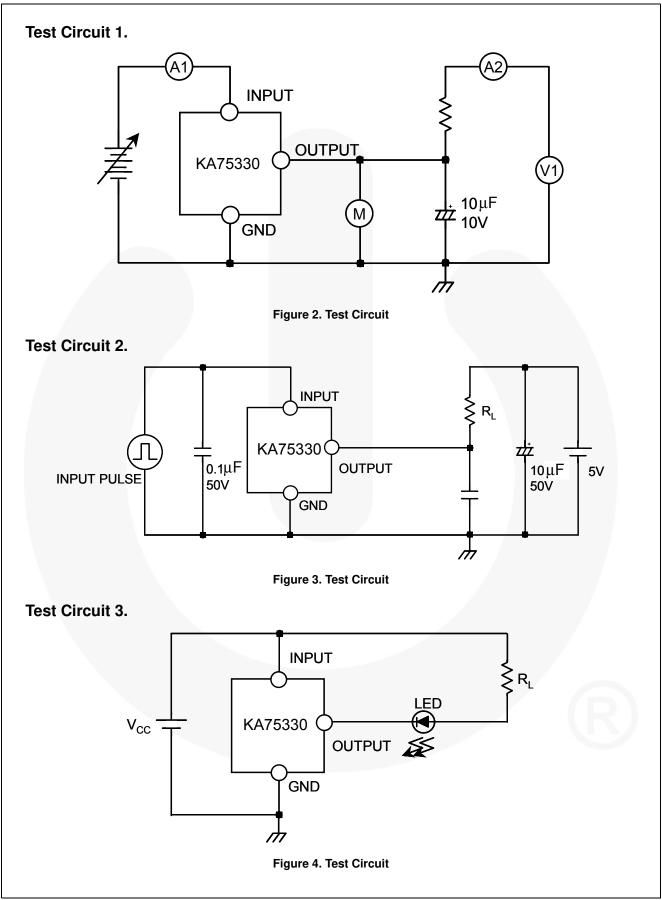

KA75330 — Voltage Detector

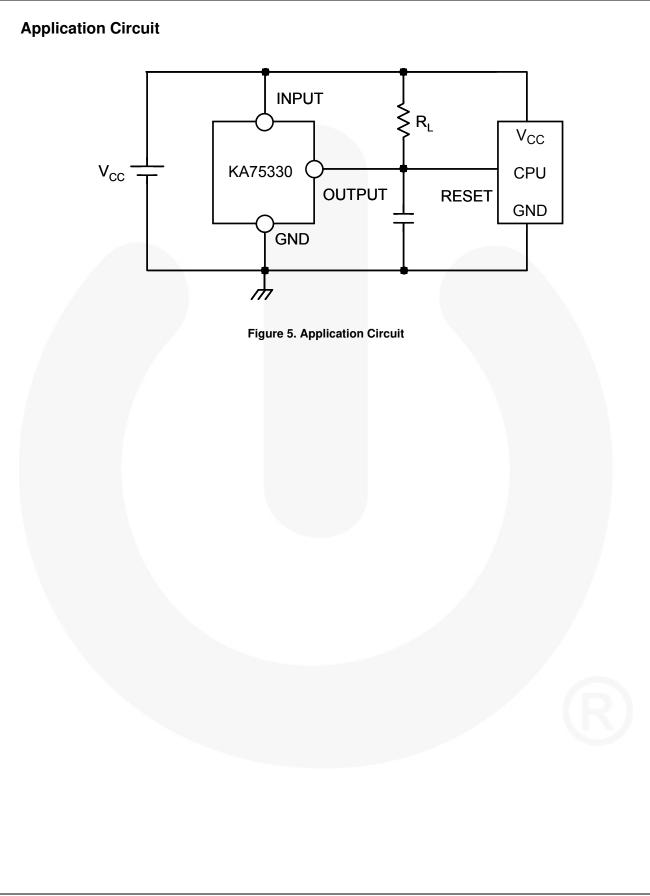

KA75330 — Voltage Detector

KA75330 — Voltage Detector **Physical Dimensions** TO-92 Ammo Type \_5.20\_**-**5.33 3.44 2.54 13.00 10,50 2 7 0.52 0.56 0.36 NOTES: UNLESS OTHERWISE SPECIFIED 2.80 DRAWING WITH REFERENCE TO JEDEC TO-92 RECOMMENDATIONS. A) RECOMMENDATIONS. ALL DIMENSIONS ARE IN MILLIMETERS. DRAWING CONFORMS TO ASME Y14.5M-1994. TO-92 (92,94,96,97,98) PIN CONFIGURATION: B) C) D) 92 ЫN P F M P F M B F M P F M P F M 1 E S S E S S B D G C G D C G D 4.19 D G В 2 В G D S D S S 3 C G D B D D D LEGEND: 2.66 P – BIPOLAR F – JFET D – DRAIN S – SOURCE G – GATE EMITTER Е F – JFET M – DMOS B - BASE C - COLLECTOR ГТ FOR PACKAGE 92, 94, 96, 97 AND 98: PIN CONFIGURATION DRAIN "D" AND SOURCE "S" ARE INTERCHANGEAGLE AT JFET "" OPTION. DRAWING FILENAME: MKT-ZAO3FREV2. E) F) Figure 6. 3-Lead, TO-92, Molded, 0.200 in Line Spacing Lead Form

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: <u>http://www.fairchildsemi.com/packaging/</u>

For current tape and reel specifications, visit Fairchild Semiconductor's online packaging area: <u>http://www.fairchildsemi.com/products/discrete/pdf/to92\_tr.pdf</u>.

### FAIRCHILD

SEMICONDUCTOR\*

#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

2Cool™ AccuPower™ AX-CAP™ BitSiC™ Build it Now™ CorePLUS™ CorePOWER™ CROSSVOLT™ CTI ™ Current Transfer Logic™ DEUXPEED® Dual Cool™ EcoSPARK<sup>®</sup> EfficientMax™ ESBC™ R F Fairchild® Fairchild Semiconductor® FACT Quiet Series™

F-PFS™ FRFET® Global Power Resource<sup>™</sup> GreenBridge™ Green FPS™ Green FPS™ e-Series™ Gmax™ GTO™ IntelliMAX™ **ISOPLANAR™** Making Small Speakers Sound Louder and Better MegaBuck™ MICROCOUPLER™ MicroFET™ MicroPak™ MicroPak2™ MillerDrive™ MotionMax™ mWSaver™ OptoHiT™ **OPTOLOGIC**<sup>®</sup> **OPTOPLANAR®** 

QFET<sup>®</sup> **OS™** Quiet Series™ RapidConfigure™ ∩™ Saving our world, 1mW/W/kW at a time™ SignalWise™ SmartMax™ SMART START™ Solutions for Your Success™ SPM STEALTH™ SuperFET<sup>®</sup> SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS® SyncFET™ Sync-Lock™ GENERAL®\*

PowerTrench<sup>®</sup>

Programmable Active Droop™

PowerXS™

TinỳCalc™ TinyLogic<sup>®</sup> TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TranSiC™

TriFault Detect™

power

franchise

TinyBoost™

TinyBuck™

The Power Franchise®



UHC<sup>®</sup> Ultra FRFET™ UniFET™ VCX™ VisualMax™ VoltagePlus™ XS™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

R

#### DISCLAIMER

FACT

FAST®

FastvCore™

FETBench™ FPS™

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild to combat this global problem and encourage our customers to ot their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 163

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC