


NOTES: UNLESS OTHERWISE SPECIFIED.

1. FINISH:
 BODY: NICKEL
 CENTER CONTACT PIN: GOLD
 INNER SHIELD PIN: GOLD
2. FEMALE SUBMINIATURE TRIAXIAL THREADED PC BOARD JACK.
3. MINIMUM CENTER TO CENTER MOUNTING: $.500$
4. MAXIMUM BOARD THICKNESS: $.125$
5. \triangle PRE-TINNED WITH SN63 OR EQUIVALENT.

RECOMMENDED MTG HOLE PATTERN

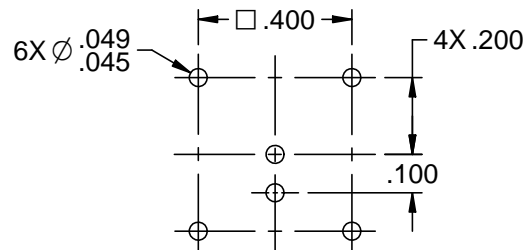

		Trompeter	
		Title: TTM JACK, CIRCUIT BOARD MOUNT	
<small>This PROPRIETARY Document is property of Emerson Network Power. Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not tracked or copied without permission and is retrievable upon demand.</small>	<small>UNLESS OTHERWISE SPECIFIED</small> UNITS: INCH .XX $\pm .02$.XXX $\pm .005$ ANGLES $\pm 2^\circ$	Model No. CBJ3157	
<small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</small>	Size A DO NOT SCALE DRAWING	Date: 3/5/2013	Sheet 1 of 1