

IMPACT

TE Internal #: 2057693-1 High Speed Backplane Connectors, 72 Position, Mating Alignment, Keyed Mating Alignment Type, 9 Row, 8 Column, PCB Mount Receptacle, IMPACT

View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors



Connector System: Board-to-Board Number of Positions: 72 Row-to-Row Spacing: 1.35 mm [.053 in] Mating Alignment: With

Mating Alignment Type: Keyed

Features

TE

Product Type Features

Connector SystemBoard-to-BoardPCB Connector Assembly TypePCB Mount ReceptacleShroud StyleUnshroudedConnector & Contact Terminates ToPrinted Circuit BoardConfiguration Features24Number of Ground Positions24Number of Pairs24StackableNoNumber of Signal Positions48Number of Positions72Number of Rows9Number of Columns8DOB Man Polinia Fridation8	Signal Arrangement	Differential
Shroud StyleUnshroudedConnector & Contact Terminates ToPrinted Circuit BoardConfiguration Features24Number of Ground Positions24Number of Pairs24StackableNoNumber of Signal Positions48Number of Positions72Number of Rows9Number of Columns8	Connector System	Board-to-Board
Connector & Contact Terminates ToPrinted Circuit BoardConfiguration FeaturesNumber of Ground Positions24Number of Pairs24StackableNoNumber of Signal Positions48Number of Positions72Number of Rows9Number of Columns8	PCB Connector Assembly Type	PCB Mount Receptacle
Configuration FeaturesNumber of Ground Positions24Number of Pairs24StackableNoNumber of Signal Positions48Number of Positions72Number of Rows9Number of Columns81	Shroud Style	Unshrouded
Number of Ground Positions24Number of Pairs24StackableNoNumber of Signal Positions48Number of Positions72Number of Rows9Number of Columns8	Connector & Contact Terminates To	Printed Circuit Board
Number of Pairs24StackableNoNumber of Signal Positions48Number of Positions72Number of Rows9Number of Columns8	Configuration Features	
StackableNoNumber of Signal Positions48Number of Positions72Number of Rows9Number of Columns8	Number of Ground Positions	24
Number of Signal Positions48Number of Positions72Number of Rows9Number of Columns8	Number of Pairs	24
Number of Positions72Number of Rows9Number of Columns8	Stackable	No
Number of Rows9Number of Columns8	Number of Signal Positions	48
Number of Columns 8	Number of Positions	72
	Number of Rows	9
	Number of Columns	8
PCB Mount Orientation Right Angle	PCB Mount Orientation	Right Angle

High Speed Backplane Connectors, 72 Position, Mating Alignment, Keyed Mating Alignment Type, 9 Row, 8 Column, PCB Mount Receptacle, IMPACT



Guide Location	Unguided
Electrical Characteristics	
Operating Voltage	30 VAC
Signal Characteristics	
Number of Differential Pairs per Column	3
Data Rate	25 Gb/s
Body Features	
Primary Product Color	Black
Contact Features	
PCB Contact Termination Area Plating Material Thickness	1.27 μm[50 μin]
Contact Layout	Inline
Contact Type	Socket
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	.76 μm[29.92 μin]
Contact Mating Area Plating Material	Gold
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Dual Beam
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	.75 A
Termination Features	
Termination Post & Tail Length	1.2 mm[.047 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Guide Hardware	Without
Mating Retention	Without
PCB Mount Retention	With
PCB Mount Retention Type	Action/Compliant Tail
Mating Alignment	With
Mating Alignment Type	Keyed
Connector Mounting Type	Board Mount

C For support call+1 800 522 6752

High Speed Backplane Connectors, 72 Position, Mating Alignment, Keyed Mating Alignment Type, 9 Row, 8 Column, PCB Mount Receptacle, IMPACT



Housing Features

Number of Shrouded Sides	0
Housing Material	LCP (Liquid Crystal Polymer)
Centerline (Pitch)	1.9 mm[.075 in]
Dimensions	
Connector Length	15.2 mm[.598 in]
Connector Height	13.3 mm[.524 in]
Connector Width	24.2 mm[.953 in]
PCB Thickness (Recommended)	1 mm[.039 in]
PCB Hole Diameter	.39 mm[.015 in]
Row-to-Row Spacing	1.35 mm[.053 in]
Usage Conditions	
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Approved Standards	CSA Certified, UL E28476

UL Flammability Rating

UL 94V-0

Packaging Features

Packaging I	Method
-------------	--------

Box & Tube, Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

High Speed Backplane Connectors, 72 Position, Mating Alignment, Keyed Mating Alignment Type, 9 Row, 8 Column, PCB Mount Receptacle, IMPACT



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts




TE Part # 2057754-2 IMP100S,H,V3P8C,LG,REW46,4.9


TE Part # 2057754-3 IMP100S,H,V3P8C,LG,REW46,5.5 TE Part # 2057755-1 IMP100S,H,V3P8C,LG,REW39,4.5 TE Part # 2057755-2 IMP100S,H,V3P8C,LG,REW39,4.9

High Speed Backplane Connectors, 72 Position, Mating Alignment, Keyed Mating Alignment Type, 9 Row, 8 Column, PCB Mount Receptacle, IMPACT



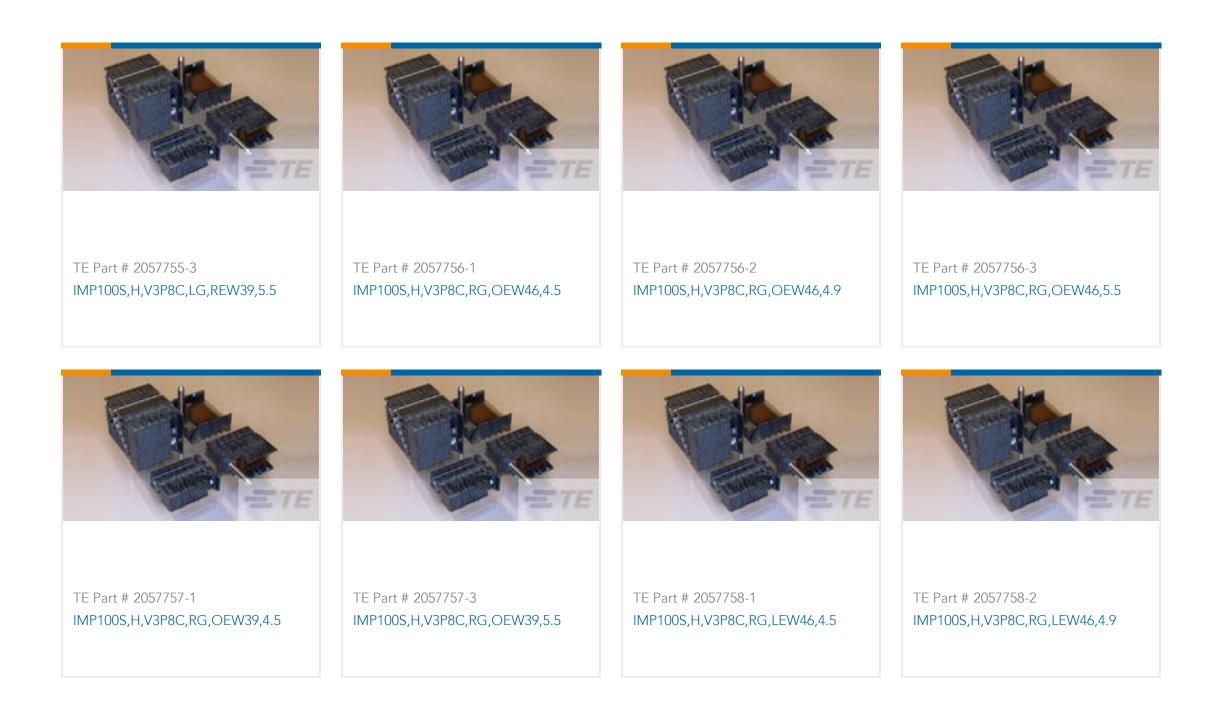

Also in the Series IMPACT

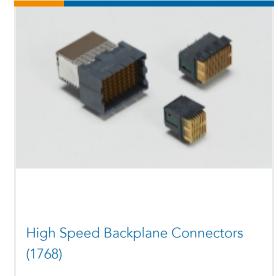

Customers Also Bought



High Speed Backplane Connectors, 72 Position, Mating Alignment, Keyed Mating Alignment Type, 9 Row, 8 Column, PCB Mount Receptacle, IMPACT



TE Part #5-2371900-8 PCIE G5 CONN,164P,ASSY,30",SLIM, NO RIDGE

Documents

CAD Files

Customer View Model ENG_CVM_CVM_2057693-1_D.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_2057693-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2057693-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Product Specifications

Application Specification

English

Application Specification

English

Product Environmental Compliance MD_2057693-1_05242018915_dmtec

English

MD_2057693-1_05242018915_dmtec

English

Agency Approvals Agency Approval Document

English