



Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
 Insulation Material: Polyester UL94V-0
 PBT
 Contact plating: 30U' Gold

All materials must be GP materials

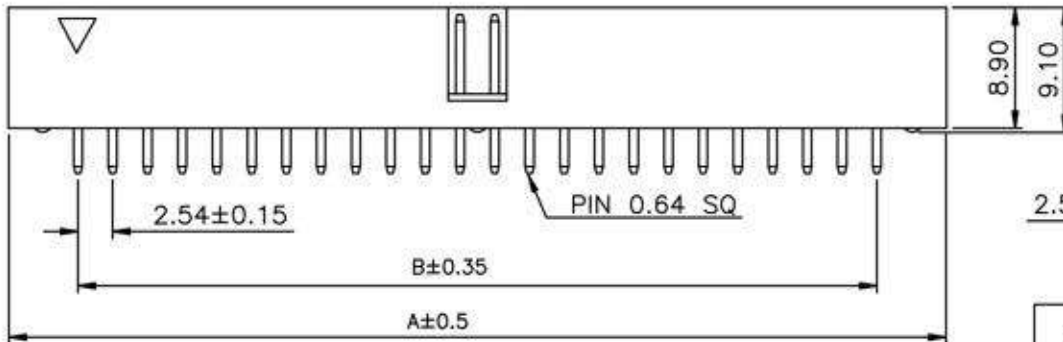

NUMBER OF POSITION	Dimensions	
	A	B
10	20.32	12.70
14	25.40	17.78
16	27.94	20.32
20	33.02	25.40
26	40.64	33.02
30	45.72	38.10
34	50.80	43.18
40	58.42	50.80
50	71.12	63.50
60	83.82	76.20
64	88.90	81.28

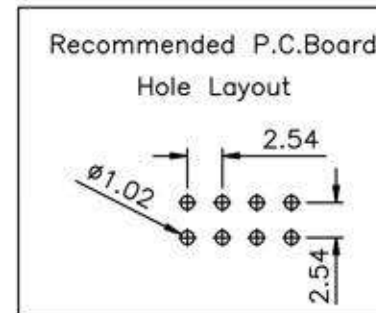

CnC Tech, LLC
 Industrial Cable and Connector Technology

DESIGN <i>lumayl</i>	PART NO.	3020-XX-0200-02	
DATE 2011. 12. 05	REV A	SIZE A4	UNLESS OTHERWISE SPECIFIED TOLERANCE ANG ±5° 0 ±0.3 .0 ±0.15 .00 ±0.10
CHECKED	UNIT mm		