


#### MTA 100

TE Internal #: 4-643815-1 Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100

#### View on TE.com >



Connectors > Rectangular Connectors > Standard Rectangular Connectors > Nylon Tin Plated Receptacle: 2.54 mm, with Mating Alignment, MTA 100

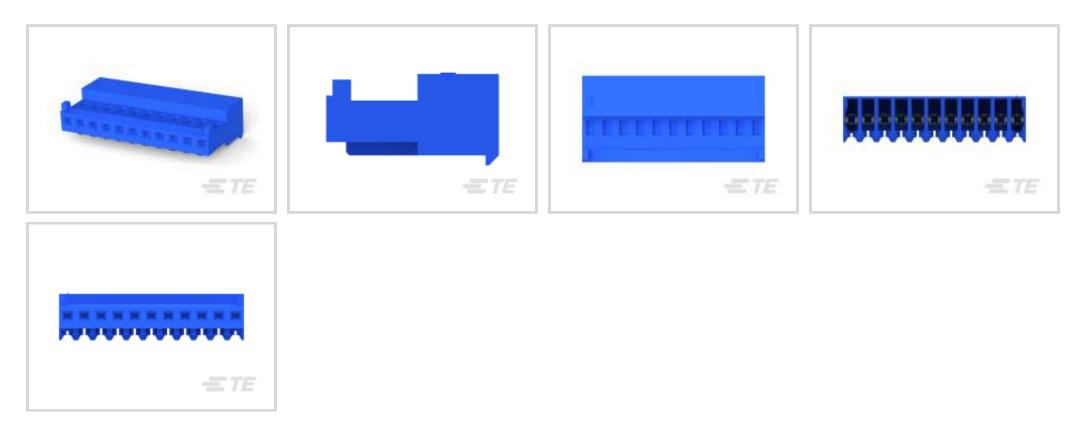

Connector Product Type: Connector Assembly

Connector & Housing Type: Receptacle

Mating Alignment: With

Mating Alignment Type: Polarization

Mating Retention: With

All Nylon Tin Plated Receptacle: 2.54 mm, with Mating Alignment, MTA 100 (127)

## Features

#### **Product Type Features**

| Compatible With Discrete Wire Type | Stranded           |
|------------------------------------|--------------------|
| Connector Product Type             | Connector Assembly |
| Connector & Housing Type           | Receptacle         |
| Connector System                   | Wire-to-Board      |
| Sealable                           | No                 |
| Connector & Contact Terminates To  | Wire & Cable       |
| Configuration Features             |                    |
| Number of Cavities                 | 11                 |
| Contacts Preloaded                 |                    |
| Contacts reloaded                  | Yes                |
| Number of Positions                | Yes<br>11          |
|                                    |                    |

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100



| Operating Voltage                              | 250 VAC                       |
|--|-------------------------------|
| Contact Features                               |                               |
| Contact Type                                   | Receptacle                    |
| Wire Contact Termination Area Plating Material | Tin                           |
| Contact Underplating Material                  | Nickel                        |
| Contact Mating Area Plating Material           | Tin                           |
| Contact Retention Within Housing               | With                          |
| Contact Current Rating (Max)                   | 5 A                           |
| Termination Features                           |                               |
| Termination Method to Wire & Cable             | Insulation Displacement (IDC) |
| Mechanical Attachment                          |                               |
| Contact Retention Type Within Housing          | Locking Lance                 |
| Mating Alignment                               | With                          |
| Mating Alignment Type                          | Polarization                  |
| Mating Retention                               | With                          |
| Mating Retention Type                          | Locking Ramp                  |
|  |                               |

# Housing Features

| Housing Material            | Nylon                      |
|-----------------------------|----------------------------|
| Housing Color               | Blue                       |
| Centerline (Pitch)          | 2.54 mm[.1 in]             |
| Dimensions                  |                            |
| Connector Height            | 13.21 mm[.52 in]           |
| Product Width               | 6.99 mm[.275 in]           |
| Product Length              | 27.94 mm[1.1 in]           |
| Wire Size                   | .12 – .15 mm²              |
| Usage Conditions            |                            |
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
| Operation/Application       |                            |
| Shielded                    | No                         |
| Circuit Application         | Signal                     |
| Industry Standards          |                            |

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100



| CSA Rating   | LR 7189  |
|--|--|
| UL Rating  | Recognized   |
| Agency/Standard  | CSA, UL  |
| Approved Standards   | UL E28476  |
| UL Flammability Rating   | UL 94V-2   |
| Packaging Features   |  |
| Packaging Quantity   | 500  |
| Packaging Method   | Bag/Box  |
| <b>Product Compliance</b><br>For compliance documentation, visit the product page on TE.com> |  |
| EU RoHS Directive 2011/65/EU   | Compliant  |
| EU ELV Directive 2000/53/EC  | Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016  | No Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006   | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JAN 2023 |

#### Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100




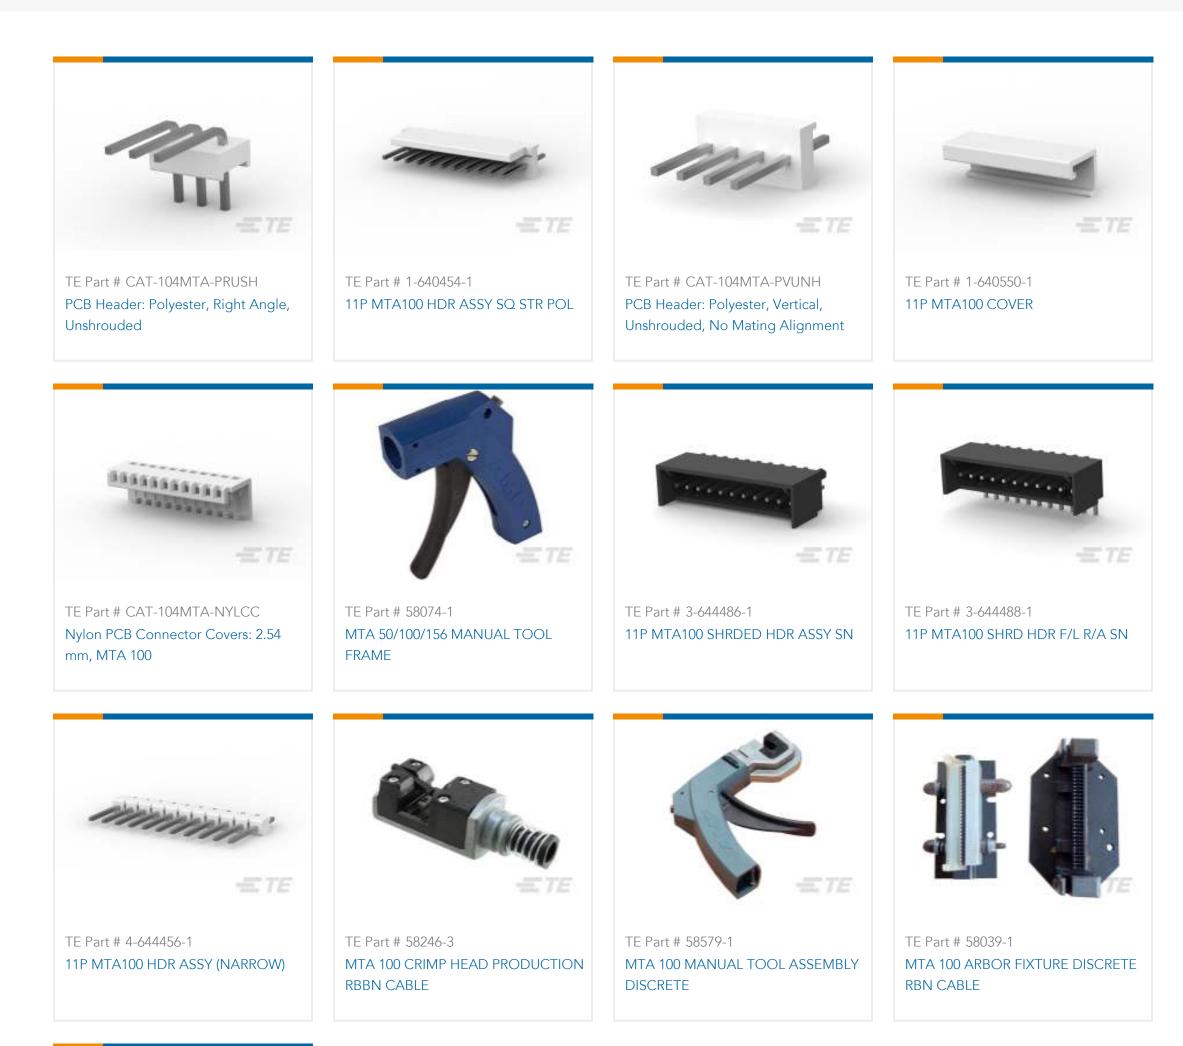




TE Part # 58246-2 MTA 100 CRIMP HEAD PRODUCTION DISCRETE

# Also in the Series MTA 100

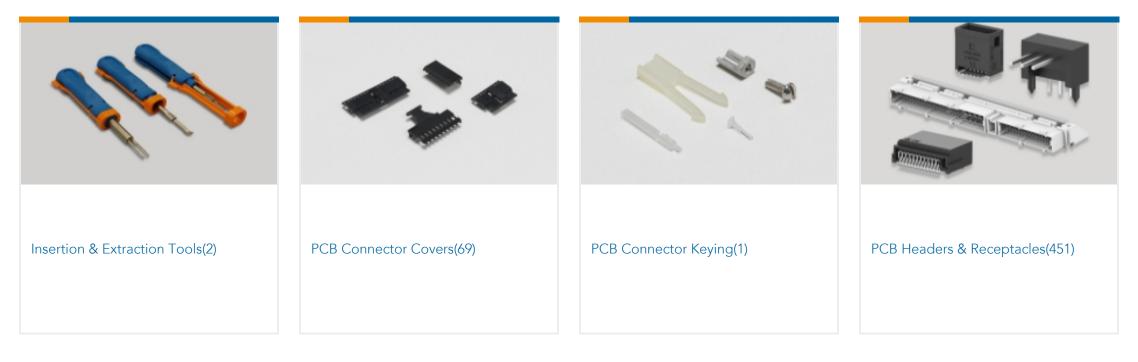

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100



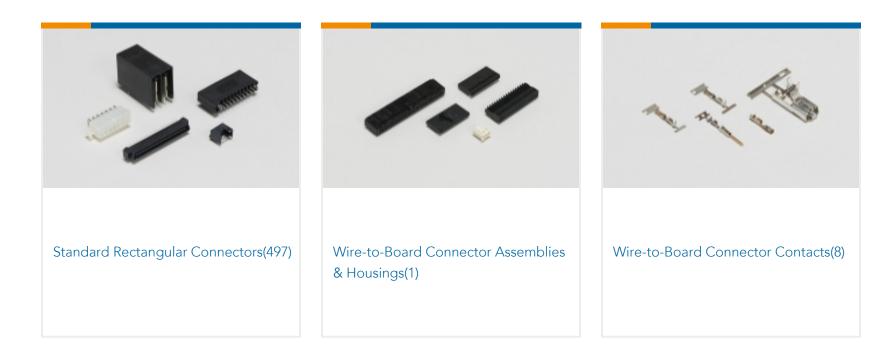

# Customers Also Bought



Nylon Tin Plated Receptacle: 2.54 mm, with Mating Alignment, MTA 100

## Documents

# **Product Drawings** 11P MTA100 CONN ASSY POL RIB

English

#### **CAD** Files

**Customer View Model** 

ENG\_CVM\_CVM\_4-643815-1\_K.2d\_dxf.zip

English

#### 3D PDF

3D

**Customer View Model** ENG\_CVM\_CVM\_4-643815-1\_K.3d\_igs.zip

English

Customer View Model ENG\_CVM\_CVM\_4-643815-1\_K.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications Application Specification** 

English

Agency Approvals

**UL Report** 

English

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100

