

	T	G	T	. m		0
_					_	



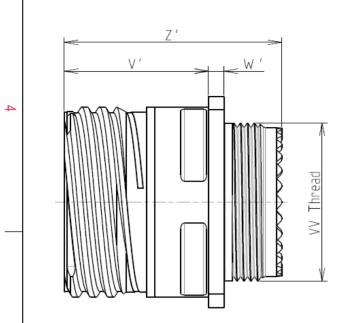



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 2000 hours

8D 0

G

11

Μ

98

Н


F

Ν

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V'	19.5+1.4/-0	
W'	2.1/3.65	
Ζ'	32 Max	
VV THREAD	M15x1-6g	

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

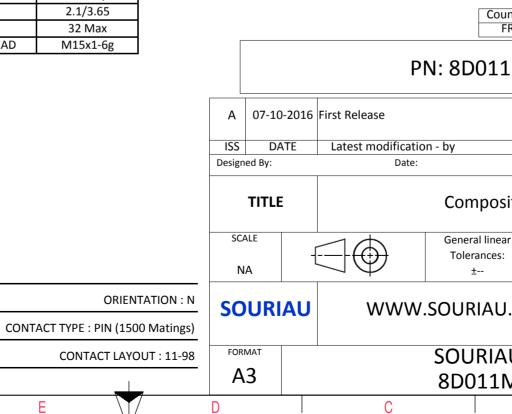

Φ		А				
	0			4		
S EXAMPLE				3		
r any non-conformity or damage s which does not comply with er of the Parties or by a third party ndation, technical notice.)						
untry Jurisc						
1M98HN	Not Listed					
	CUSTOME	R DRAWING	MOD N°			
site Receptac	customer drawing e Receptacle 8D series					
ar	NPRDS / PROJECT					
		59	anta a f	1		
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U DRG N°	1		SHEET			
M98HN-C		A	1/2	J		
U	I	~				

		۵	ات	m		0	
		Contact Layout					Panel Cutout
						SQUARE FLANGE RECEPTACLE (REAR MOUNTING R1	
4	-×	$ \overset{\mathbb{E}}{\oplus} \overset{\Phi}{\oplus} \overset{\Phi}{\oplus} \overset{\Phi}{\oplus} \overset{\Phi}{\to} \overset{\mathbb{E}}{\to} \overset{\mathbb{E}}$			1		
	Cont	Contacts (Insert arrangement 11-98) act Contact location			<u>ح</u> –		
	positi ID A B C C D	Jon X-axis Y-axis (mm) (mm) +.000 (0.00) +.130 (3.30) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87)			y		
	Shell Arrangement Numb size no. conta	+.000 (0.00) +.000 (0.00) er of Size Service Contact Supersedes icts contacts rating location]				ØA_
	11 -98 6	20 I All MS20050-98				F	Dim ØA
ယ							ØAA R1 ØT
							I
	-					SOLIDIAL chall c	not be liable for any
						due to a use the Specifications	of the Products whi issued by either of onal recommendati
N							Country FR
						PI	N: 8D011M
						16 First Release	
					ISS DATE Designed By:	Latest modificatio	n - by
					TITLE		Composite
_					SCALE NA	$\bigcirc \bigcirc$	General linear Tolerances: ±
					SOURIA	J www.	SOURIAU.C
					FORMAT A3		SOURIAU 8D011M9
l	H	G	F	E	D	С	

