

All-rounder

PULS

SL20.303

- Input: 3 AC 400V
- Output: 48...56V / 480W (600W)
- 92% efficiency
- Ideal for parallel operation
- Simple fusing



CE
EMC and
Low Volt.
Directive

C_{UL} US
UL60950 E137006
CUL/CSA-C22.2
No. 60950

C_{UL} US

UL508 LISTED
IND. CONT. EQ.
18 WM, 60°C

CB
scheme
IEC60950

Data sheet

Input

Input voltage	3 AC 400 V, – 15 %, + 20 % 47-63 Hz, suitable for IT power systems	
Rated tolerances		
• Continuous operation	340-479 V AC	or 450-700 V DC
• Short-term (1 min) at 48 V/10 A	300-550 V AC	or 370-790 V DC
Input current	3 x 1.5 A	
Inrush current	< 15 A at 440 V AC	
Inrush current limiting done with a fixed 47R resistor (not a thermistor) which is bridged after the unit is running, so losses are minimised. That means no reset time even at a warm-start.		
Fuse loading	< 2 A ² s	
To be fused with a 3 x 10A, B-type 'circuit-breaker' switch based on the usual thermomagnetic overload sensing principle (used anyway to fuse the input lines; unit has no internal fuses).		
Harmonic current emissions (PFC)	acc. to EN 61000-3-2	
Transient handling	Active transient filter incorporated, so transient resistance acc.to VDE 0160 / W2 (1300 V / 1.3 ms), for <i>all</i> load conditions.	
Hold-up time	> 11 ms at 48 V/10 A, 400 V AC	

Efficiency, Reliability etc.*

Efficiency	typ. 92 %	(48 V/10 A, 400 V AC)
Losses	typ. 42 W	(48 V/10 A, 400 V AC)
MTBF	310.000 h acc. to Siemensnorm SN 29500 (48 V/10 A, 400 V AC, T _{amb} = +40 °C)	
Life cycle (electrolytics)	The unit exclusively uses longlife electrolytics, specified for +105°C (cf. 'The SilverLine', p.2). High reliability and lifetime, as	
	<ul style="list-style-type: none"> • only four aluminum electrolytics and • no small aluminum electrolytics are used. 	

* For further information see data sheets „The SilverLine“, „SilverLine Family Branches“ and mechanics data sheet

Output

Output voltage	48...56 V DC, adjustable by (covered) front panel potentiometer, preset: 48.1V ±0.5% Adjusting range guaranteed	
Output noise suppression	Radiated EMI values below EN50081-1, even when using long, unscreened output cables.	
Ambient temperature range T _{amb}	Operation: 0°C...+70°C (>60°C: Derating) Storage: -25°C...+85°C	
Rated continuous loading with convection cooling		
• T _{amb} =0°C - 60°C	48 V / 10 A (480 W)	resp. 56 V / 9 A (504 W)
• T _{amb} =0°C - 45°C	48 V / 12.5 A (600 W)	resp. 56 V / 11 A (616 W)
	short-term (< 1 min.) also at 60°C permissible	
Derating	typ. 12 W/K (at T _{amb} =+60°C...+70°C)	
Voltage regulation	better than 2 % over all	
Ripple	< 50 mV _{pp} (i.e. < 0.1 %) incl. spikes 20 MHz bandwidth, 50 Ω measurement	
Over-voltage protect.	At 61V ± 7%: switch to hiccup mode	
Front panel indicators:		
	• Green LED on, when V _{out} > U _T , where U _T is appr. 4 V below V _{out} adjusted (48 V...56 V).	
	• Red LED on, when appr. 28 V < V _{out} < U _T .	
	• Red LED flashes, when 0 V < V _{out} < appr. 28 V.	
Parallel operation	Yes, up to ten SL20 units	
To achieve current sharing the output V/I characteristic can be altered to be 'softer' (48.8 V at 0.1 A, 48 V at 10 A). This is done by repositioning a bridge connection (without opening the unit).		
Power Back Immunity	< 63 V	

Construction / Mechanics*

Housing dimensions and Weight		
• W x H x D	220 mm x 124 mm x 102 mm (+ DIN rail)	
• Free space for ventilation	above/below 70 mm recommended right/left 25 mm recommended	
• Weight	1.8 kg	
Design advantages:		
	<ul style="list-style-type: none"> • All connection blocks are easy to reach as mounted at the front panel. • PVC insulated cable can be used for all connections, as the connection blocks are mounted in the cooler area on the underside of the unit. 	

Order information

Order number	Description
SL20.303	
SLZ02	Screw mounting set, two needed per unit

Start / Overload Behaviour

Startup delay	typ. 0.2 s
Rise time	appr. 20-80 ms, depending on load
Duration of switch-on attempts at	
• Initial application on mains	appr. 1.4 s
• Subsequent attempts	appr. 0.5 s
Hiccup operation at	$V_{out} < \text{appr. } 28 \text{ V}$
Duration between switch-on attempts	appr. 4 s

Electronic current limiting, protects against overload and short circuit:

- $V_{out} < \text{appr. } 28 \text{ V}$: Periodical switch-on attempts (hiccup mode).
 - $V_{out} > \text{appr. } 28 \text{ V}$: The output current is continuous.
- The V/I characteristic of the supply is straight.

Advantages of the switch-on/overload behaviour:

- Safer switch-on into highly non-linear loads with large starting currents.
 - Short-term overloads result in current limiting and not in an immediate shut-down.
 - Parallel operation of several units possible.
- Proper switch-on performance is obtained.

Further information

For further information, especially about


- EMC
- Connections
- Safety, Approvals
- Mechanics und Mounting,

see page 2 of the „The SilverLine“ data sheet.


For detailed dimensions

see SilverLine mechanics data sheet SL20


Output V/I characteristic (typ.)

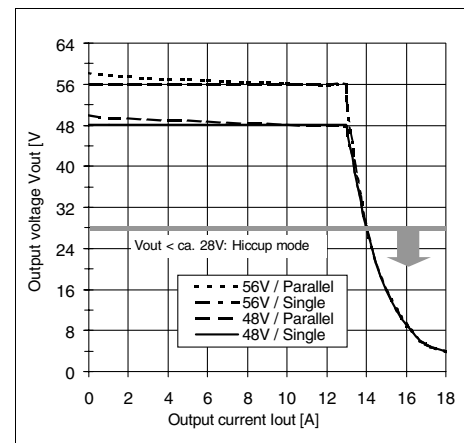

Efficiency (typ., at $V_{out}=48\text{V}$)

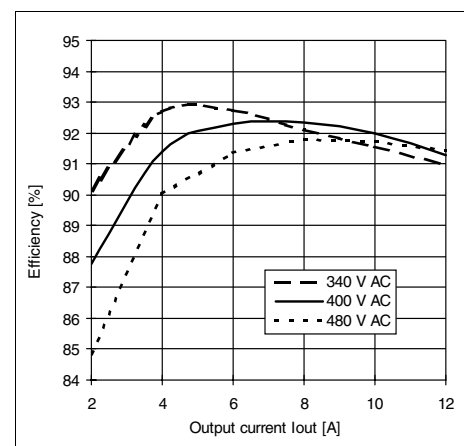

Hold-up time (min., at $V_{out}=48\text{V}$)

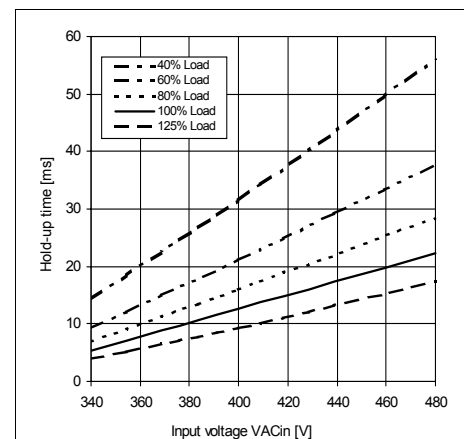

Specifications valid for 3 x AC 400V input voltage, +25°C ambient temperature, and 5 min run-in time, unless otherwise stated. They are subject to change without prior notice.

Your partner in power supply:



European
Power Supply
Manufacturers
Association



Bayerns Best 50
Czech 100 Best
Europe's 500

PULS GmbH

Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com


SL20

- Innovative DIN-Rail mount, unit holds even at vibration or lateral pressure
- Clearly arranged and user oriented
- Large, robust screw terminals
- Sealed metal housing
- Fine ventilating grid




Data sheet


Front view SL20.300

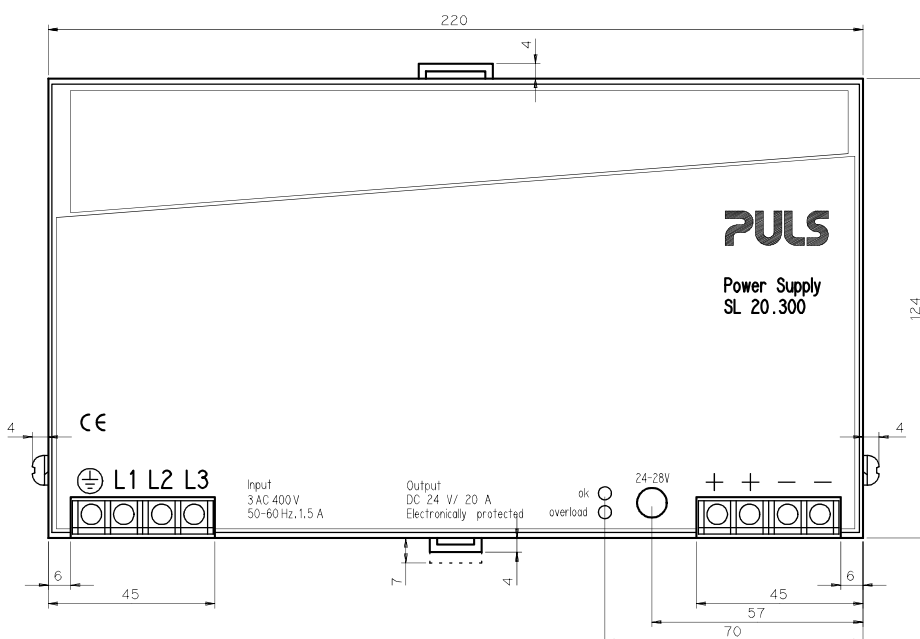

Input terminals SL20.1xx



Output terminals SL20.115

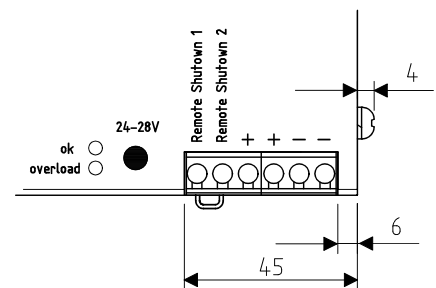

Construction / Mechanics

Housing dimensions and Weight

- W x H x D 220 mm x 124 mm x 102 mm (+ DIN rail)
- Free space for above/below 70 mm recommended ventilation left/right 25 mm recommended
- Weight 1.5 kg (SL20.100) / 1.8 kg (SL20.110, SL20.300) 2.5 kg (SL20.111, SL20.115)

Robust metal housing with fine ventilat. grid ($\Delta > 3,5$ mm, IP20), to keep out small parts (e.g. screws)

Mounting on DIN-Rail (TS35/7.5 or TS35/15, 1...1.5 mm thick) therefore

- Simple snap-on system
- Sits safely and firmly on the DIN-Rail
- No tools required to remove

or backplane-mounted (two optional screw mounting sets SLZ01 required)

Connections

Connections

- Input/Output
- Current handling capacity
- Grid

Screw terminals, connector size range:

- solid 0.5- 6 mm² / flexible 0.5 - 4 mm²
- 30 A per output
- Two connectors per output, 9 mm (SL20.115: 6 mm) distance between adjacent connectors

Design advantages:

- All connection blocks are easy to reach as mounted at the front panel. Input/output strictly apart from each other, thus no mixing up
- PVC insulated cable can be used for all connections, no thermal protection is needed

Order information


Order number

SL20.100 / .101
SL20.110 / .111
SL20.115
SL20.300 / .301
SLZ01


Description

AC 230 V, no PFC / incl. PFC
Auto select, no PFC / incl. PFC
Auto select, remote switch-off
3 AC 400 V / 3 AC 480 V
Screw mounting set, two needed per unit

Input terminals
SL20.1xx bottom view




Input terminals
SL20.30x bottom view

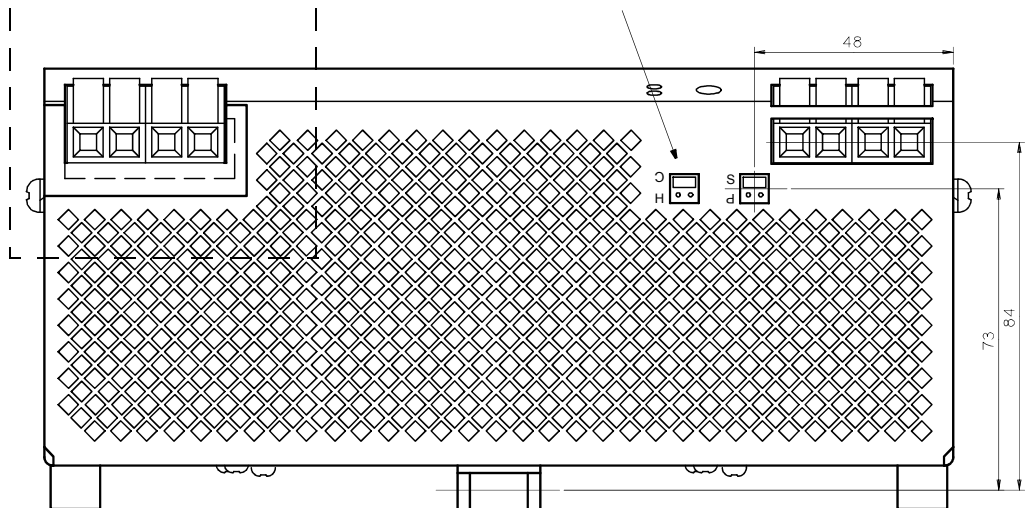


**Bottom view
SL20**

Side view SL20

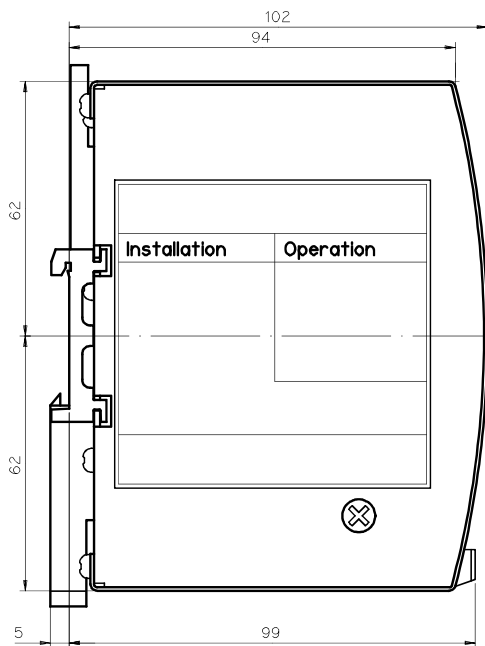

Output terminals
SL20.115 bottom view

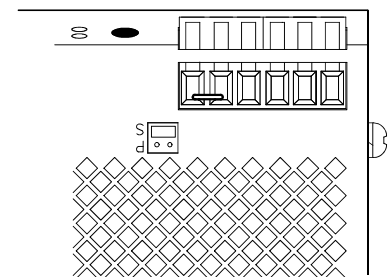

This 'mechanics data sheet' exclusively deals with the mechanical properties of the product. For further information (especially concerning electrical properties), please refer to the generic data sheet of the SL20 and to the basic data sheet „The SilverLine“ dealing with common features of all SilverLine units. This datasheet is subject to change without prior notice

Your partner in power supply:



Bayerns Best 50
Czech 100 Best
EuropeOs 500

PULS GmbH

Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com