


AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 3-1355200-1 Housing for Female Terminals, Wire-to-Wire, 2 Position, .236 in [6 mm] Centerline, Sealable, Blue, Wire & Cable, Power, Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > AMP MCP, SEALED CONNECTOR HOUSING

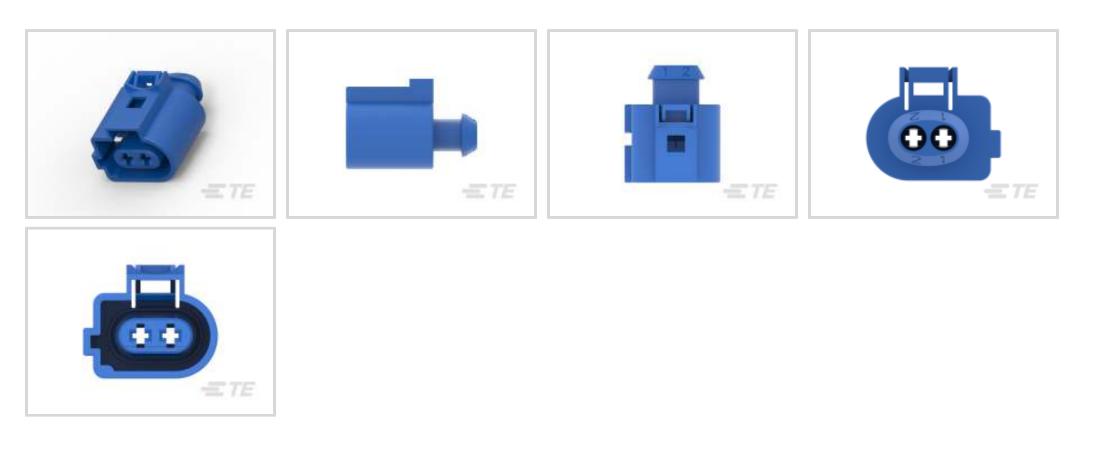

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 6 mm [.236 in]

All AMP MCP, SEALED CONNECTOR HOUSING (164)

Features

Product Type Features

Connector Shape	Rectangular			
Connector & Housing Type	Housing for Female Terminals			
Connector System	Wire-to-Wire			
Sealable	Yes			
Hybrid Connector	No			
Primary Locking Feature	On the Terminal			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	2			
Number of Rows	1			
Electrical Characteristics				
Nominal Voltage Architecture	25 V			
Body Features				

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 2 Position, .236 in [6 mm] Centerline, Sealable, Blue, Wire & Cable, Power, Hybrid



Cable Exit Angle	180°
Primary Product Color	Blue
Connector & Keying Code	С
Contact Features	
Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Contact Current Rating (Max)	35 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PAGF
Centerline (Pitch)	6 mm[.236 in]

Dimensions

Connector Height	33 mm[1.299 in]			
Product Width	22.7 mm[.893 in]			
Product Length	25 mm[.984 in]			
Usage Conditions				
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F] [212 °F][221 °F]			
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]			
Operation/Application				
Circuit Application	Power			
Industry Standards				
Degree of Protection	IP67, IP69K			
Degree of Protection UL Flammability Rating	IP67, IP69К UL 94НВ			

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 2 Position, .236 in [6 mm] Centerline, Sealable, Blue, Wire & Cable, Power, Hybrid



Packaging Quantity	1000
Packaging Method	Container
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC			
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free			
Solder Process Capability	Not reviewed for solder process capability			

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

Housing for Female Terminals, Wire-to-Wire, 2 Position, .236 in [6 mm] Centerline, Sealable, Blue, Wire & Cable, Power, Hybrid






Also in the Series AMP MCP 2.8

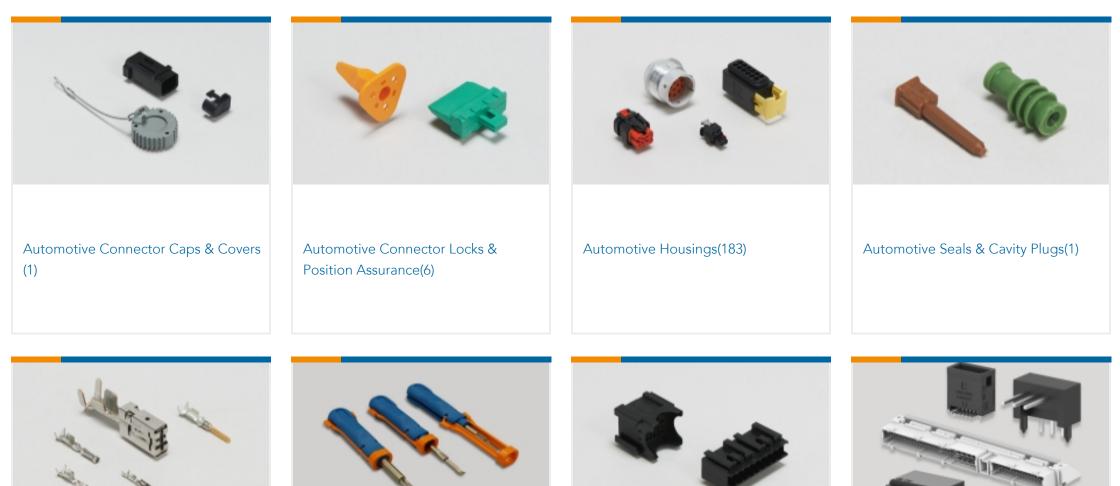


Automotive Terminals(10)	Insertion & Extraction Tools(6)	Module Components(1)	PCB Headers & Receptacles(1)	

Also in the Series AMP MCP Connector System

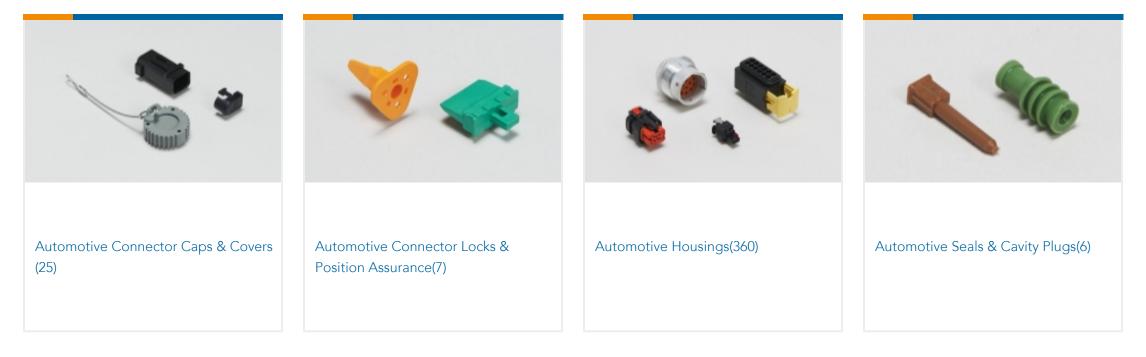


Housing for Female Terminals, Wire-to-Wire, 2 Position, .236 in [6 mm] Centerline, Sealable, Blue, Wire & Cable, Power, Hybrid



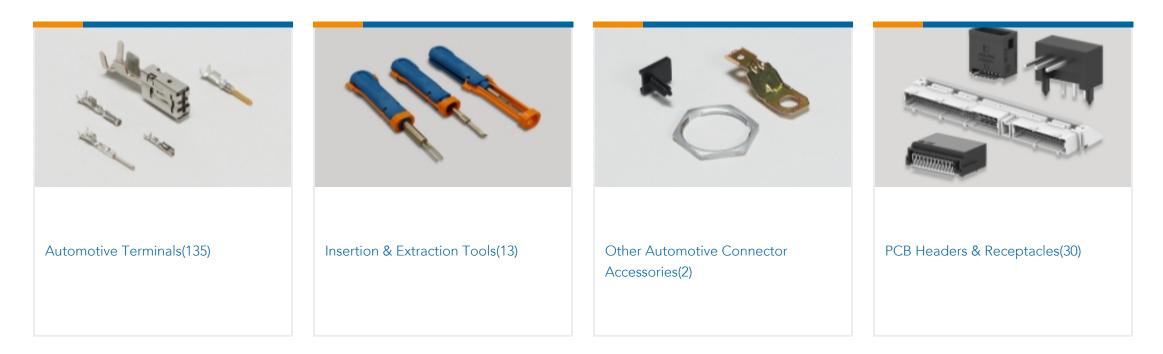

Customers Also Bought

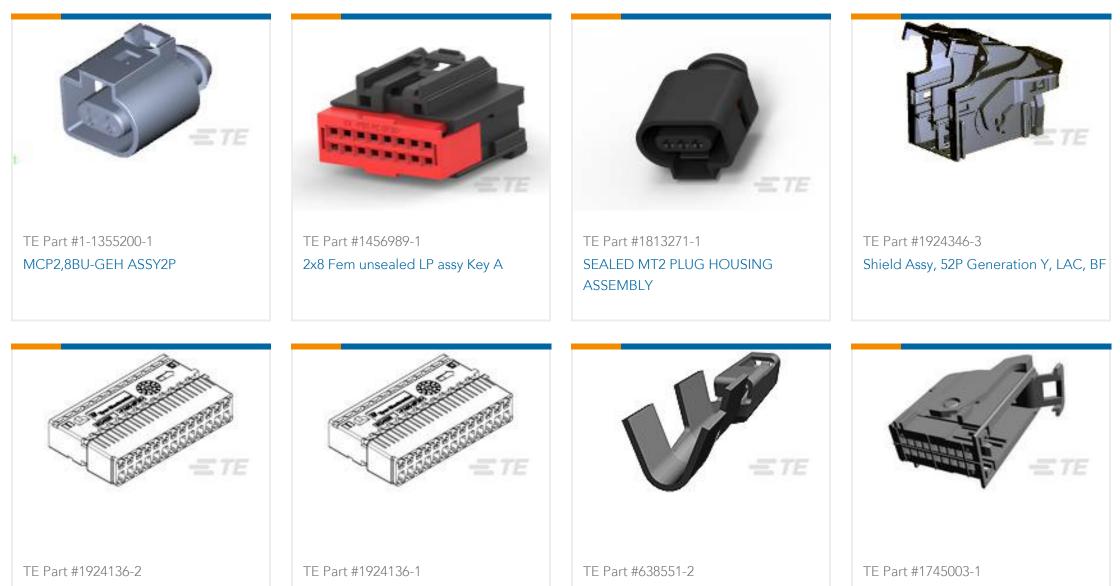

Carrier, 26P Generation Y, 52P Conn

Carrier, 26P Generation Y, 52P Conn



Documents

Product Drawings MCP2,8BU-GEH ASSY2P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1355200-1_D.2d_dxf.zip

S For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 2 Position, .236 in [6 mm] Centerline, Sealable, Blue, Wire & Cable, Power, Hybrid



English

Customer View Model ENG_CVM_CVM_3-1355200-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1355200-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English