

6

5

4

3




2

1


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/8/20	

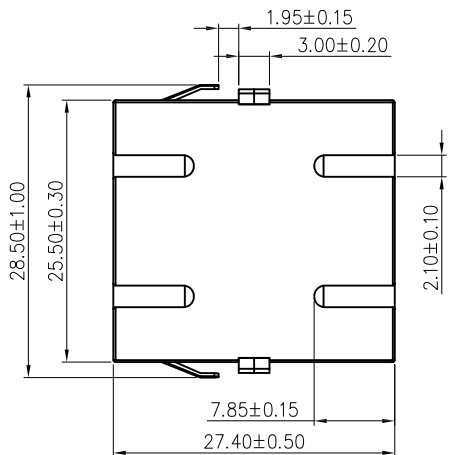

DUST CAP DRAWING

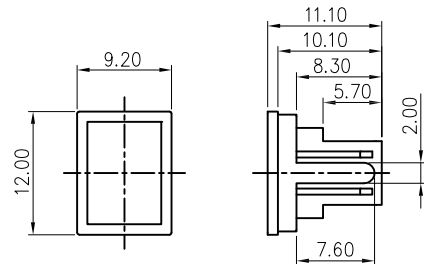

DRAWINGS WITH DUST CAPS

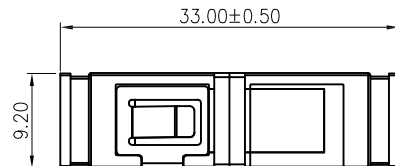

SPECIFICATIONS:

Material:
Housing: PBT, rated UL 94V-0, Color: See Chart
Cap: PBT, rated UL 94V-0, Color: Black
Sleeve: Zirconia Ceramic
Electrical:
Standards of IEC, EIA/TIA, Telcordia
Repeatability: 500 min
Insertion loss: 0.2dB max
Interchangeability: 0.2dB max
Repeatability: 0.2dB max
Temperature Rating:
Operating temperature: -40°C to +75°C
Environmental:
Lead free, RoHS compliant.



OPSA2BNNC1N1	SC/APC ADAPTER DUPLEX SHORT EARS (NO SHRAPNEL) WEAR TWO DUST CAPS	PBT 7737C Green	PBT BLACK
OPSA2BNNC1P1	SC/APC ADAPTER DUPLEX SHORT EARS (WITH SHRAPNEL) WEAR TWO DUST CAPS	PBT 7737C Green	PBT BLACK
OPSB2BNNC1N1	SC/PC ADAPTER DUPLEX SHORT EARS (NO SHRAPNEL) WEAR TWO DUST CAPS	PBT 2184C Blue	PBT BLACK
OPSB2BNNC1P1	SC/PC ADAPTER DUPLEX SHORT EARS (WITH SHRAPNEL) WEAR TWO DUST CAPS	PBT 2184C Blue	PBT BLACK
PART NUMBER	DESCRIPTION	Housing&Insert color	Cap color

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		
MM	ANGLE	
X. ± 0.35	X° ± 2°	
.X ± 0.30	.X° ± 1°	
.XX ± 0.25	.XX° ± 0.5°	
.XXX ± 0.15	.XXX° ± 0.5°	
APPROVALS		DATE
DRAWN	OW	9/8/20
CHECKED	JL	9/8/20
APPROVED		

ADAM TECH INTERCONNECTS 909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SC TYPE ADAPTER, APC&PC, 2 PORTS
SHORT EARS, WITH SC TWO TYPE DUST CAP

SIZE X	PART NO. OPXS2BNNC1X1	REV. -
REF: S00005C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1