Open Type Trimmer

Model 38



Features:

- 10 mm single turn
- Dust proof
- Carbon element
- Low TCR
- RoHS compliant



Model Styles Available

Top Adjust	38P
Side Adjust	38W

Electrical

Resistance Range	100 to 1,000,000 Ohms
Standard Resistance Tolerance	± 30%, (±20% and ±10% available)
Input Voltage, Maximum	200 Vdc
Power rating, Watts	Linear :0.15W, others : 0.07W, at 50 ℃
End Resistance, Maximum	2 ohms or 0.5% whichever is greater
Actual Electrical Travel	220°±20°
Insulation Resistance, Minimum	100 Megohms
Resolution	Essentially infinite
Contact Resistance Variation	5% Max.
Temperature Coefficient of Resistance	±500 ppm/°C

Mechanical

Torque, Maximum	1.5 in - oz.
Wiper Position	Approx. 50%

Open Type Trimmer


Model 38




Environmental

Operating Temperature Range	-25℃ to +70℃
Rotational Life, 500 Cycles	±3% ΔR
Load Life, 0.15W, 100 Hours, 50°C	±5% ΔR
Resistance to Solder Heat	260°C for 3 sec.
Aqueous cleaning not recommended	


Ordering Information

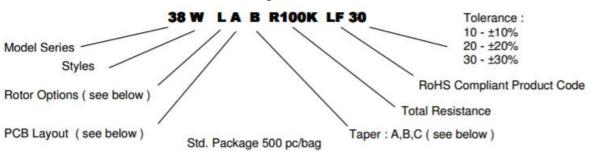


Rotor Options





PCB Layout Options



Taper Options








Open Type Trimmer

Model 38




Outline Drawings

Model 38P (Top Adjust)

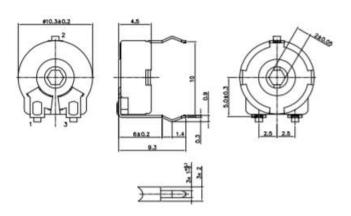

Model 38W (Side Adjust)



Circuit Diagram

Standard Resistance Values, Ohms

100 500 1K 2K 5K 10K 20K 50K 100K 200K 500K 1MEG