

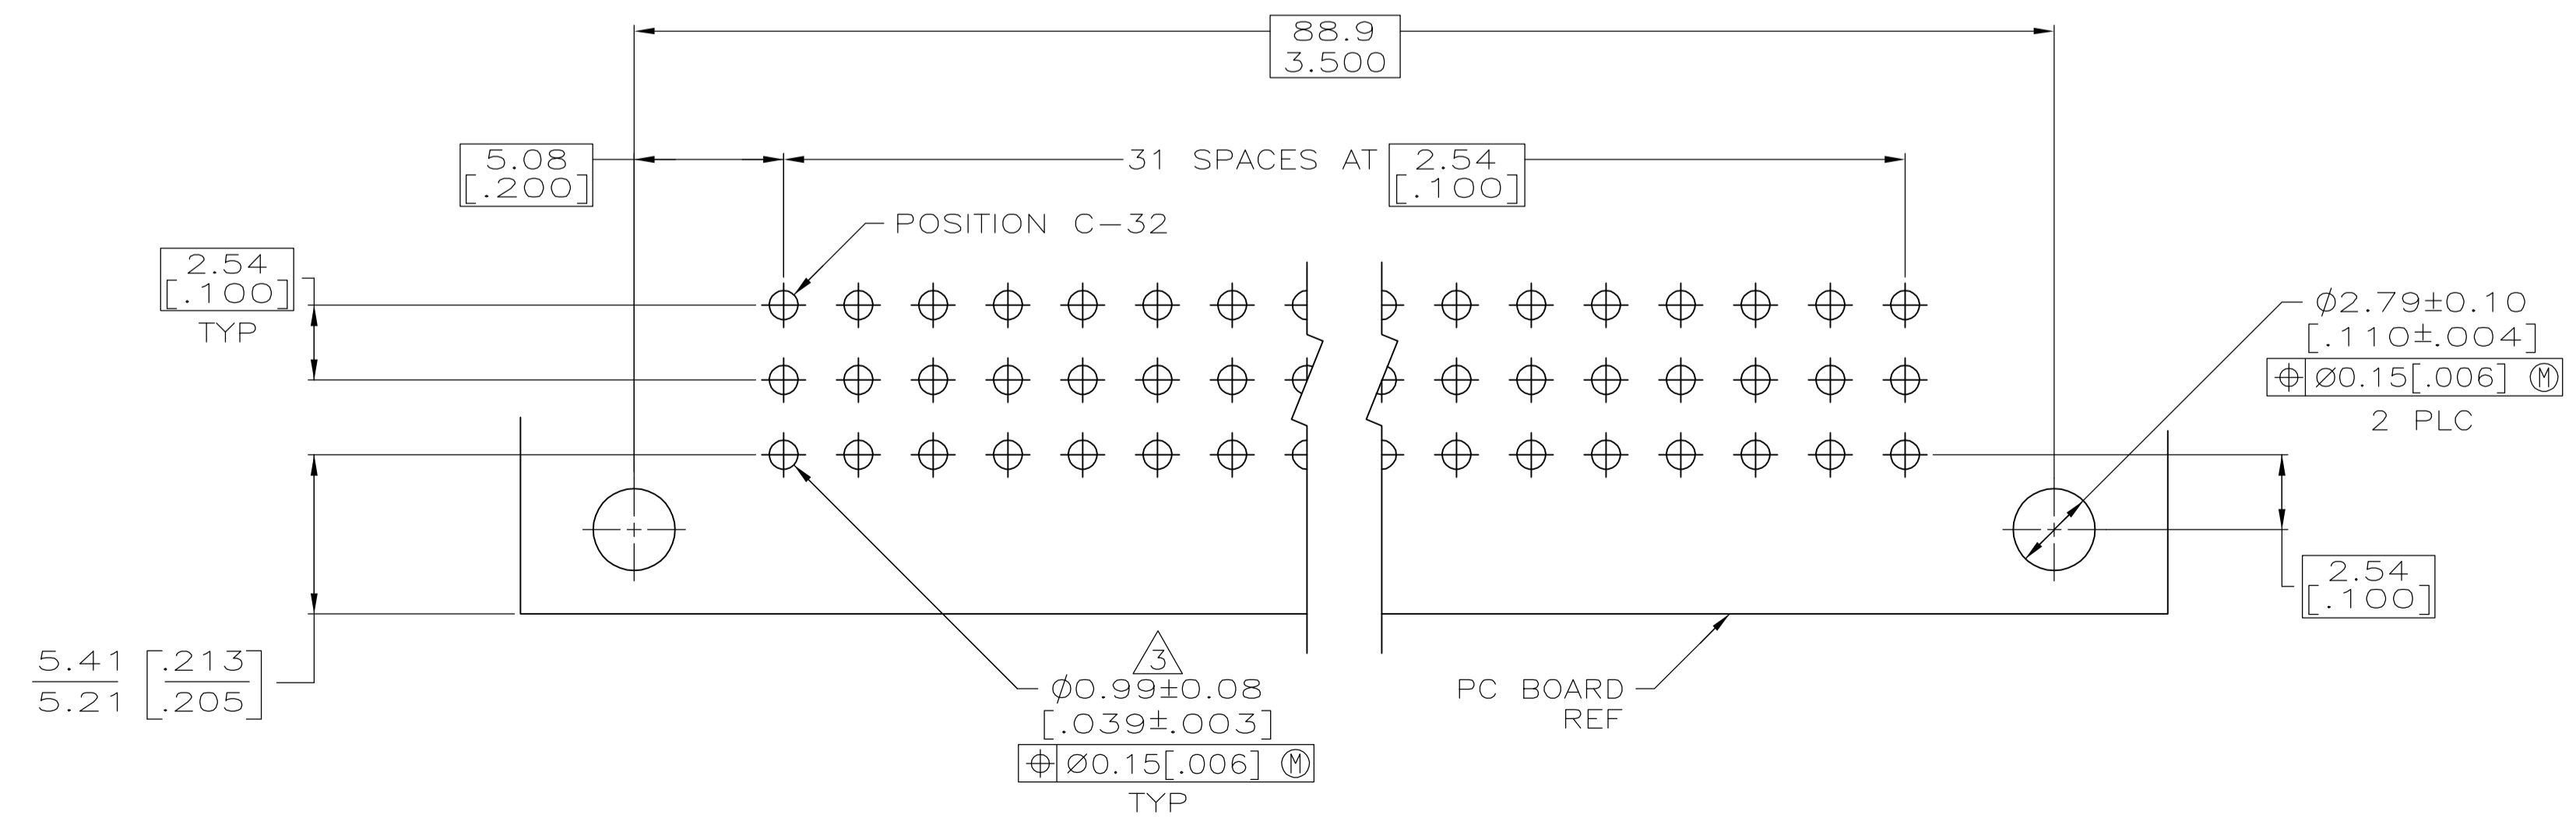
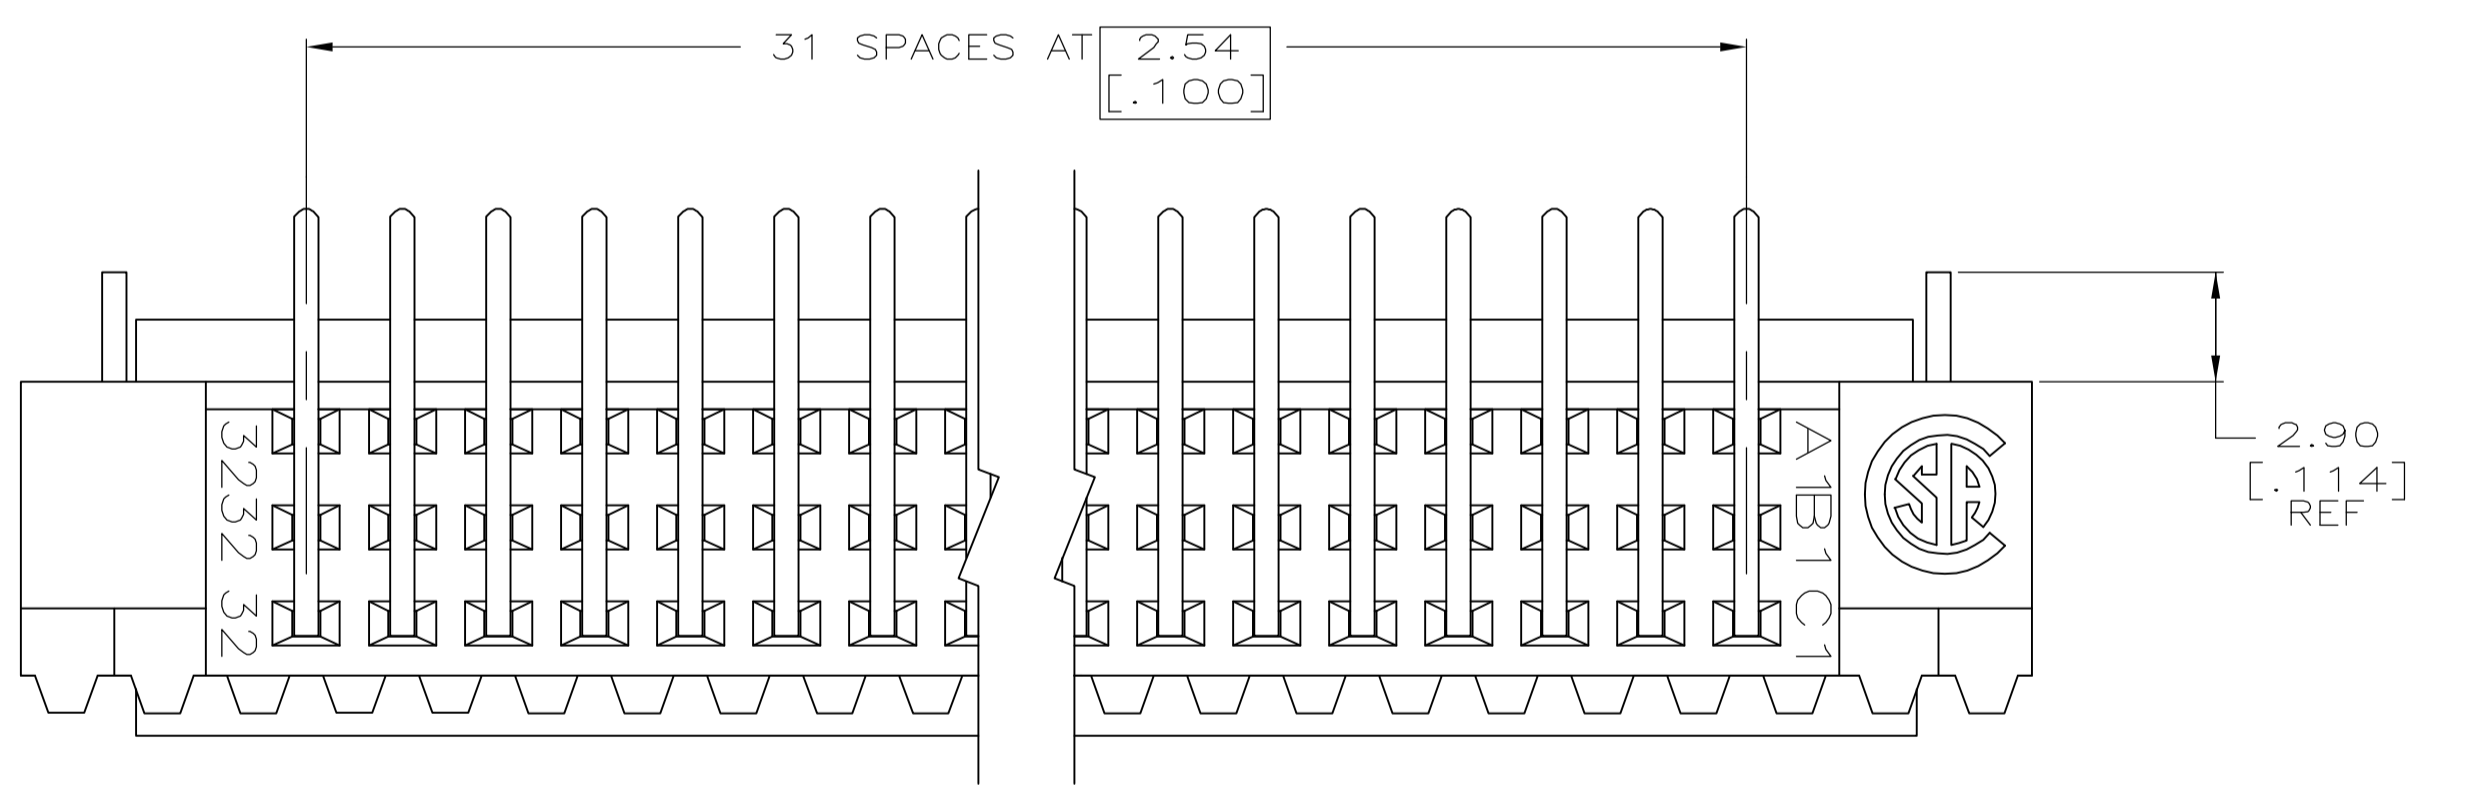
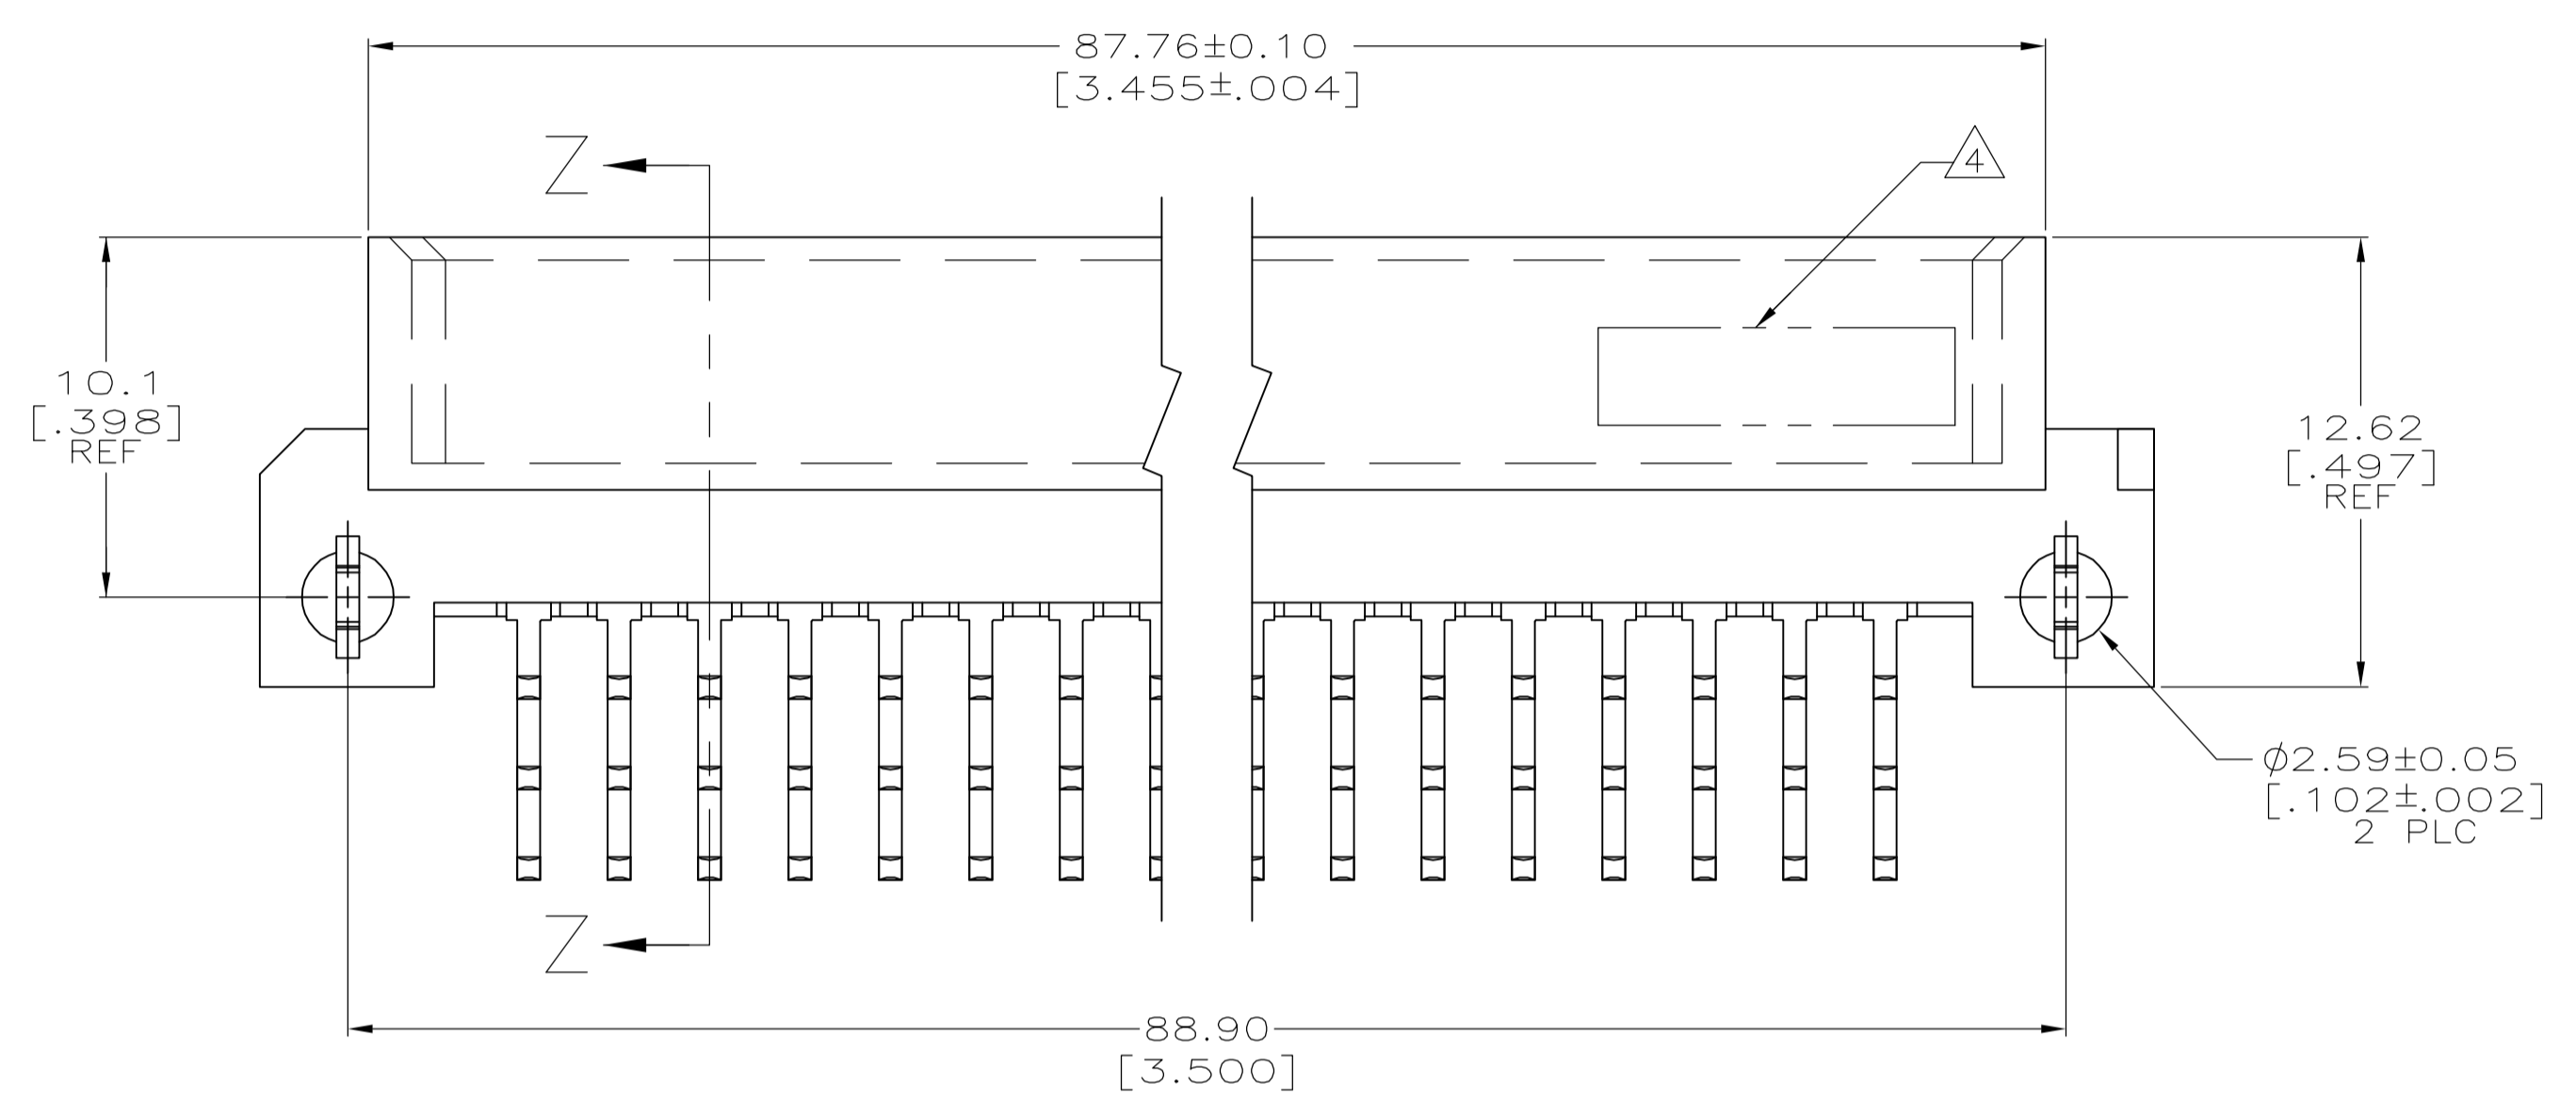


LOC		DIST		REVISIONS				
AD	00	REV	PER	ECO	NO	DATE	BY	APVD
01		REV PER	ECO-06-026651			05DEC2006	BC	AS

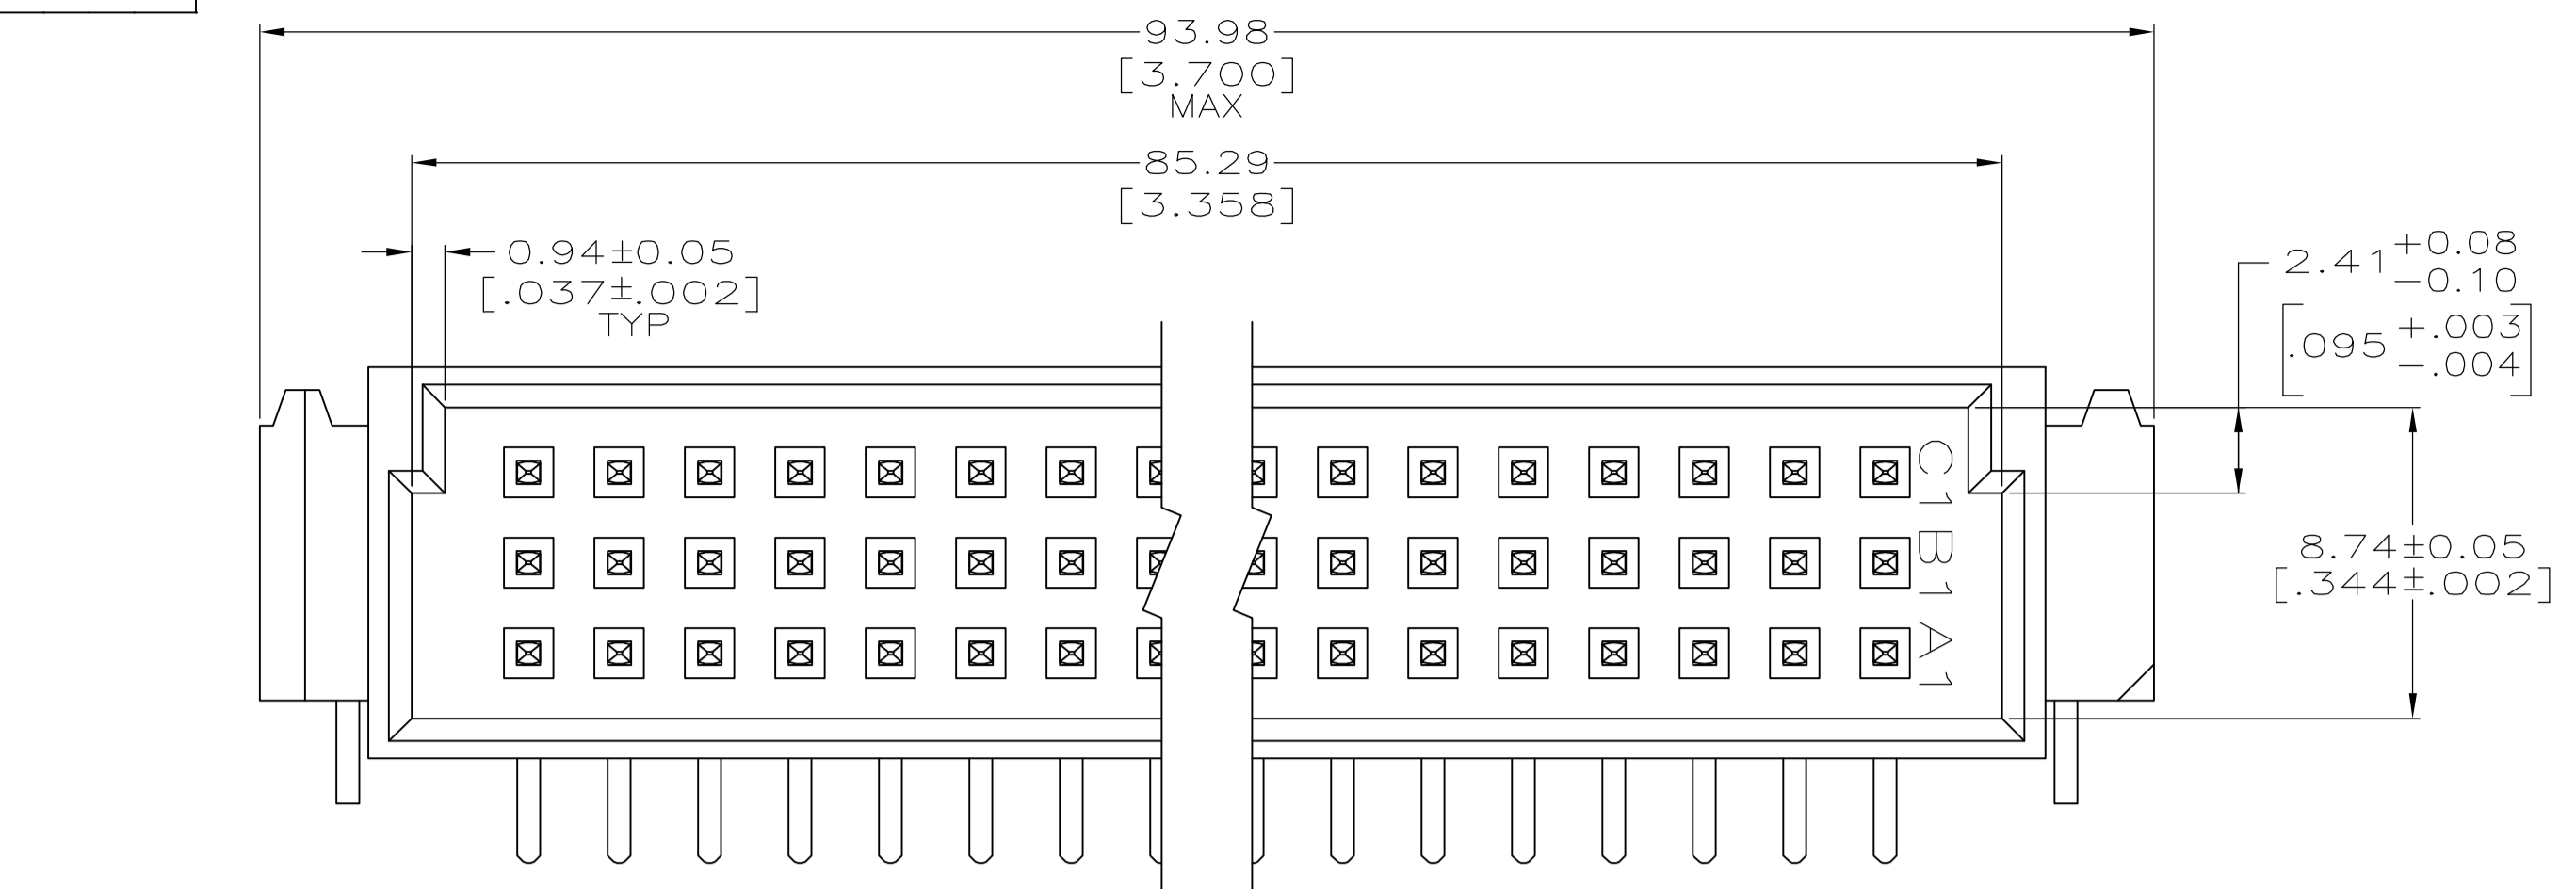

PC BOARD LAYOUT
 RECOMMENDED PC BOARD THICKNESS 1.57 [.062]

- △ HOUSING: GLASS-FILLED POLYMER.
POST: COPPER ALLOY.
- △ POST: DIN 41612 CLASS 2 IN CONTACT AREA,
TIN PLATE ON POSTS.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF
CONNECTOR ONTO PC BOARD.
- △ PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.
- △ MARKING ON THIS SIDE.

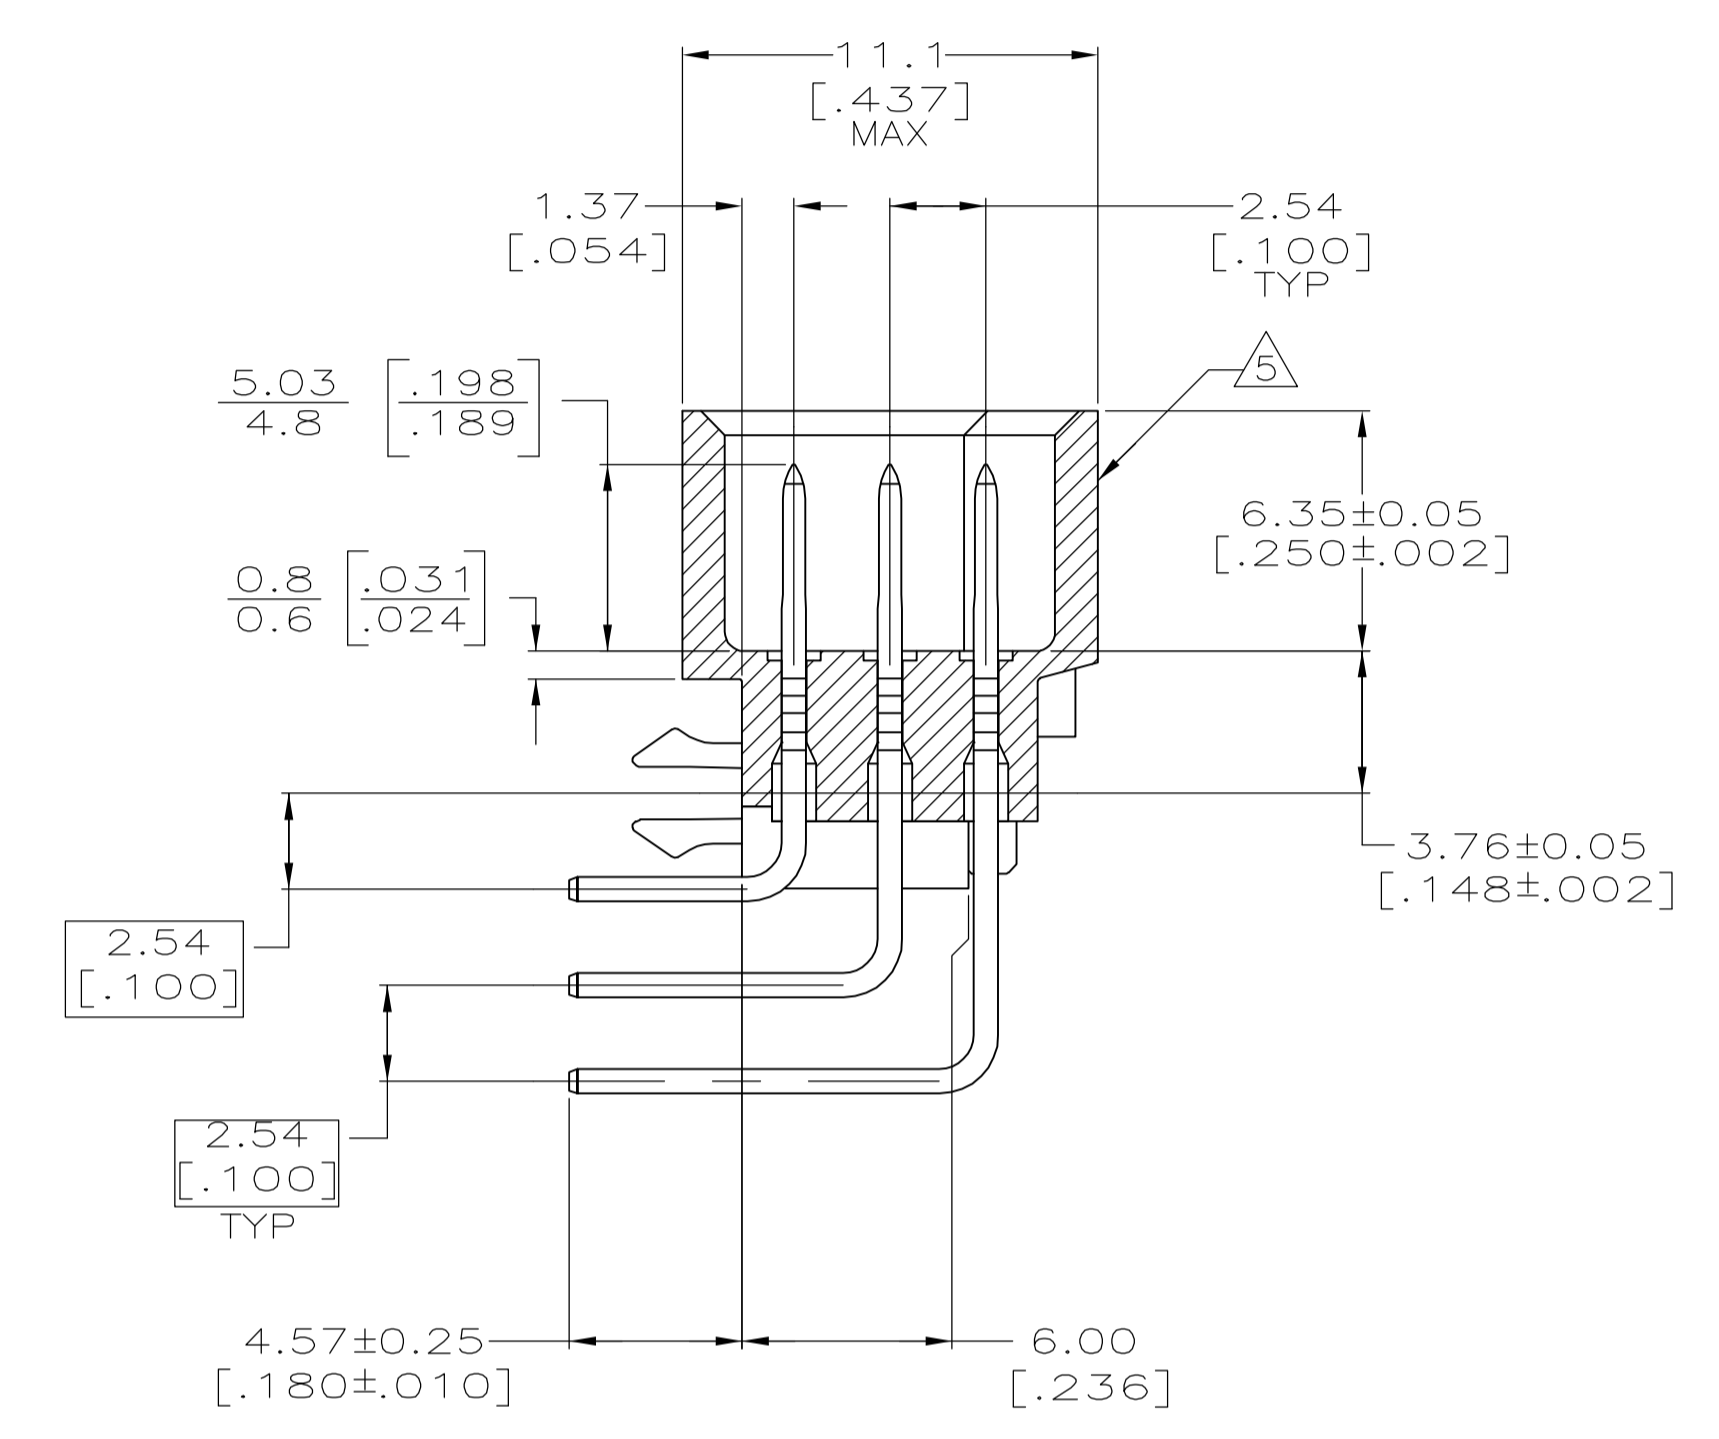

5148539-5
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. POLIGNONE DSMAYOS	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]		CHK A. SHARPE DSMAYOS	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. SHARPE DSMAYOS	NAME
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	ASSEMBLY, PIN, EUROCARD, TYPE C, 96 POSITION, 4.57[.180] SOLDER POST WITH BOARD-LOCKS
2 PLC ± 0.13 [.005]	3 PLC ± -	APPLICATION SPEC	SIZE CASE CODE DRAWING NO
4 PLC ± -	ANGLES ± -	FINISH	RESTRICTED TO
MATERIAL △	FINISH △	WEIGHT -	A1 00779 C=5148539
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1 REV 01