

# Series 35W000 RoHS/WEEE-Compliant SOWIC-to-DIP 14- to 28-Pin Adapter

#### **FEATURES**

- Pb-Free RoHS/WEEE-Compliant
- A cost-effective means of upgrading to SOIC without changing your PCB layout
- Available on 0.300 [7.62] centers. Consult <u>Data Sheet 18011</u> for Adapters on 0.400 [10.16], or 0.600 [15.24] centers.

#### **GENERAL SPECIFICATIONS**


- BOARD MATERIAL: 0.062 [1.58] thick FR-4 or IS410 per IPC 4101A/26 with 1-oz. Cu traces, both sides finished with ENIG (Immersion Au over electroless Ni)
- PINS: Brass 360 1/2-hard per UNS C36000, ASTM B16/B16M
- PIN PLATING: 10µ [0.254µ] Au per MIL-G-45204 over 100µ [2.54µ] Ni per SAE AMS-QQ-N-290

.062

OPERATING TEMPERATURE: 221°F [105°C]

### **MOUNTING CONSIDERATIONS**

SUGGESTED PCB HOLE SIZE: 0.035 ±0.002 [0.89 ± 0.05] dia.



CUSTOMIZATION: In addition to the standard products shown on this page, Aries specializes in custom design and production. Special materials, platings, sizes, and configurations can be furnished, depending on the quantity. NOTE: Aries reserves the right to change product general specifications without notice.

## **ORDERING INFORMATION**

See Table below for P/Ns




ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED

"A" = NO. OF PINS PER ROW x 0.100 [2.54]

"D" = (NO. OF PINS PER ROW -1) x 0.100 [2.54]

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

AVAILABLE IN PANELIZED FORM WITH OR WITHOUT CUSTOMER-SUPPLIED DEVICES MOUNTED. CONSULT FACTORY.

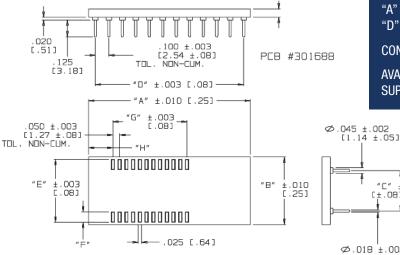

	Î
-	
Ø.018	±.002 6 ±.051

'C"

÷.003

(±.08] CTR.

P/N	Pins	Туре	Dim. "B"	Centers "C"	Dim. "E"	Dim. "F"	Dim. "G"	Dim. "H"
14-35W000-11-RC	14	SOIC	0.500 [12.70]	0.300 [7.62]	0.465 [11.81]	0.076 [1.93]	0.500 [12.70]	0.180 [4.57]
16-35W000-11-RC	16	SOIC	0.500 [12.70]	0.300 [7.62]	0.449 [11.40]	0.087 [2.20]	0.350 [8.89]	0.213 [5.42]
18-35W000-11-RC	18	SOIC	0.500 [12.70]	0.300 [7.62]	0.465 [11.81]	0.076 [1.93]	0.550 [13.97]	0.180 [4.57]
20-35W000-11-RC	20	SOIC	0.500 [12.70]	0.300 [7.62]	0.465 [11.81]	0.076 [1.93]	0.550 [13.97]	0.180 [4.57]
24-35W000-11-RC	24	SOIC	0.500 [12.70]	0.300 [7.62]	0.465 [11.81]	0.076 [1.93]	0.550 [13.97]	0.180 [4.57]
28-35W000-11-RC	28	SOIC	0.500 [12.70]	0.300 [7.62]	0.465 [11.81]	0.076 [1.93]	0.550 [13.97]	0.180 [4.57]



Bristol, PA 19007-6810 USA TEL (215) 781-9956 • FAX (215) 781-9845 WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



18007RC Rev. AB

PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED