



	REVISIONS						
REV	ECO	DESCRIPTION	DATE	BY	APPR		
A1	-	FIRST RELEASE	Sep.07,2015	Drack	Tommy		



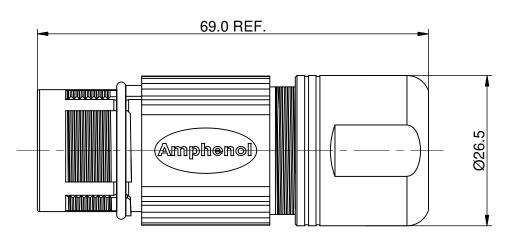

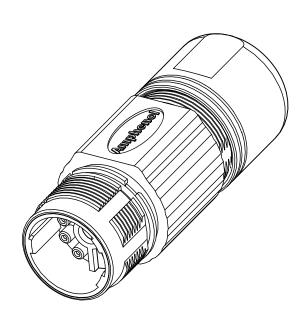

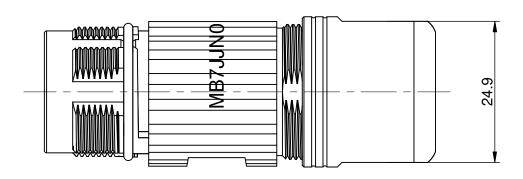

Item	Part number	Cable OD Range		
1	MB7JJN0800-S1	7.5~11.0 mm		
2	MB7JJN0800-S2	11.0~14.5 mm		
3	MB7JJN0800-S3	14.5~17.0 mm		

1. MATERIAL:

INSULATION INSERT:PA66,UL94 V0 SEAL: VITON, SILICONE, EPDM HOUSING BODY: ZINC DIE CAST, NICKEL PLATED

2. SPECIFICATIONS:

2.1 CURRENT RATING: SIGNAL: 10 AMPS

POWER: 30AMPS

2.2 VOLTAGE RATING: SIGNAL: 250V AC/DC

POWER: 630V AC/DC

2.3 OPERATING TEMPERATURE: -20°C TO +130°C

2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ SIGNAL: 2500VOLTS AC.

POWER: 6000 VOLTS AC.

M23B,RECEPTACLE,STR,8POS(4+4)

MB7JJN0800-Sx

2.5 DEGREE OF PROTECTION: IP67 (MATED CONDITION)

2.6 DEGREE OF POLLUTION: 3 PER UL840

2.7 OVERVOLTAGE CATEGORY: III PER UL840 2.8 MATING CYCLE DURABILITY: >500 CYCLES

2.9 RoHS COMPLIANT

3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

SEE PART NUMBER CHART PART NUMBER QUANTITY DESCRIPTION ITEM MATERIALS LIST UNLESS OTHERWISE SPECIFIED Amphenol SIGNATURES DATE 1) All dimensions are in metric(mm) Drack Sep.07,2015 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 Sine Systems - www.amphenol-sine.com 44724 Morley Drive 3) Note reference = XClinton Township, MI 48036 MATERIAL SPECIFICATIONS: CUSTOMER: M23B,RECEPTACLE,STR,8POS(4+4) THIS DRAWING IS SUPPLIED FOR
INFORMATION ONLY. DESIGN FEATURES,
SPECIFICATIONS AND PERFORMANCE DATA
SIZE
SHOWN HEREON ARE THE PROPERTY OF
THE AMPHENOL CORPORATION. NO RIGHTS
OF REPRODUCTION ARE IMPLIED. ALL
DIMENSIONS ARE SUBJECT TO NORMAL
MANUFACTURING VARIATIONS.

SCALE PROCESS SPECIFICATIONS: В MB7JJN0800-Sx NEXT ASS'Y: SCALE: NONE SHEET 1 OF 1