



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/4/21	

APPROVED: _____
 DATE: _____ TITLE: _____

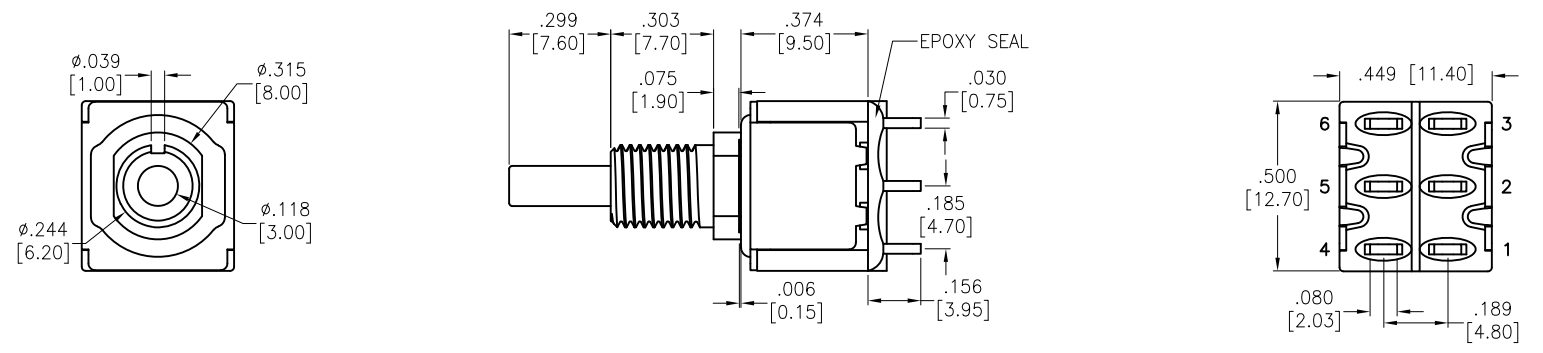

CIRCUIT DIAGRAM
 (DPDT) ON-ON

SPECIFICATIONS:
 Material:
 Movable Contact: Copper Alloy, Silver Plated
 Terminal: Copper Alloy, Silver Plated
 Electrical:
 Rating:
 6 Amps with resistive load @ 125VAC or 28VDC
 3 Amps with resistive load @ 250VAC
 Contact resistance: 10 mΩ max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,500V RMS @Sea level
 Temperature Rating:
 Operating temperature: -30°C to +85°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	WX	3/4/21	
CHECKED	AC	3/4/21	
APPROVED			

		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
		TITLE PUSHBUTTON SWITCH, ON-ON, DPDT COPPER ALLOY SILVER PLATED, SOLDER TYPE	
SIZE X	PART NO. SW-PB8-BA00A1QE-3	REV. -	
REF: S00198T	SCALE: NTS	SHEET 1 OF 1	