

## Housing - HC-B 24-TFQ-H/O2STM40G - 1412450

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON B24 sleeve housing, for double locking latch, height: 76 mm, with 2 x M40 thread, straight cable outlet

### Product Features



### Key commercial data

Packing unit	1 pc
Custom tariff number	85389099
Country of origin	Germany

### Technical data

#### General

Note	For contact inserts HC-B24, BB46, BBB64, D64, DD108, M
Type	B24

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
Degree of protection	IP65

#### Material data

Housing material	Aluminum die-cast
------------------	-------------------

### Classifications

#### eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143424

# Housing - HC-B 24-TFQ-H/O2STM40G - 1412450

## Classifications

eCl@ss

eCl@ss 8.0	27440202
------------	----------

ETIM

ETIM 4.0	EC002498
ETIM 5.0	EC002498

## Approvals

Approvals

---

Approvals

EAC

---

Ex Approvals

---

Approvals submitted


---

Approval details

EAC
-----

## Drawings

Dimensional drawing

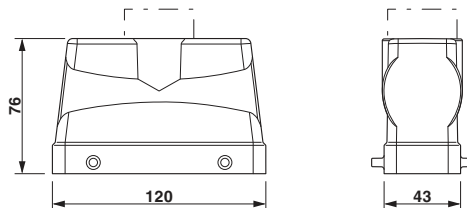

Dimensional drawing

---