




1			2			3			4			5			6			7			8		
MOLD TYPE			MOLD NO.			ITEM			REV.			ECN NO.			DATE			BY			DESCRIPTION		
CONN1 OVERMOLD			CPO0241			3,4			01						Sep/03/2020			Aine Li			RELEASED		

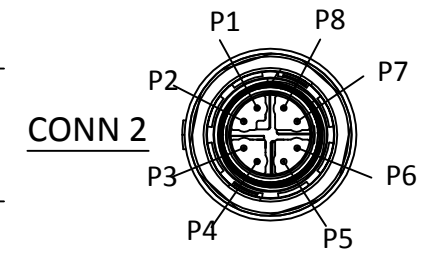

CONN 1

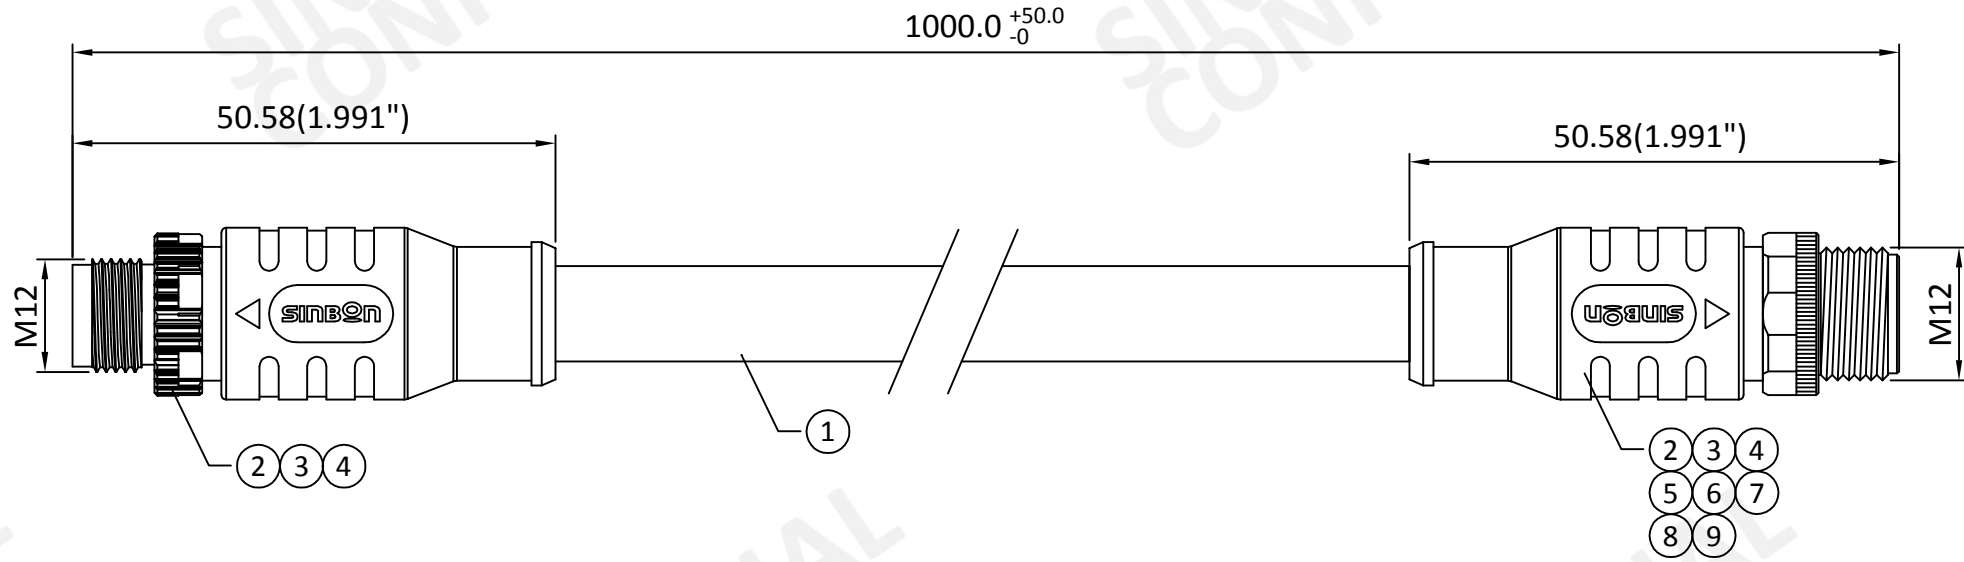

CONN 2

AWG	CONN 1		COLOR	CONN 2
24	1	○ ○ ○ ○	WHITE/ORANGE	1
	2	○ ○ ○ ○	ORANGE	2
	3	○ ○ ○ ○	WHITE/GREEN	3
	4	○ ○ ○ ○	GREEN	4
	5	○ ○ ○ ○	WHITE/BROWN	5
	6	○ ○ ○ ○	BROWN	6
	7	○ ○ ○ ○	WHITE/BLUE	7
	8	○ ○ ○ ○	BLUE	8

- NOTES:
- TESTING SPEC.:
COND. RESISTANCE: 3Ω MAX.
INSUL. RESISTANCE: 10MΩ MIN.
TESTING VOLTAGE: 300V DC
 - IP67 WHEN MATED.
 - FOLLOW IPC620 CLASS II STANDARD TO ASSEMBLY AND INSPECTION.
 - RoHS COMPLIANCE.

4.	A/R	TPU, SHORE A 78, NATURAL, HF (A51100057001SD)
3.	A/R	PLASTIC MASTERBATCH, BLACK, FORTPU (A88270010001SD)
2.	1	I/O CONN., MALE, 8P (A30140235001SD)
1.	A/R	CABLE, CAT.6, UTP PATCH CABLE, #24*4P, OD=5.6
ITEM	QTY	DESCRIPTION

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE PROPERTY OF SINBON ELECTRONICS CO., LTD. IT MAY NOT BE USED OR ITS CONTENTS COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT AND IS TO BE RETURNED PROMPTLY UPON REQUEST BY SINBON ELECTRONICS CO., LTD.

CUSTOMER : Digikey		 SINBON Electronics Co., Ltd.	
CUSTOMER P/N : N/A	REV. N/A		
UNLESS OTHERWISE SPECIFIED TOLERANCE :		DESCRIPTION : 8P M-M, X code anti-vibe IP67, 1M	
1 ~ 10 : ±1	11 ~ 30 : ±2	PART NUMBER : M12X-08CMS00-UL24N10	
31 ~ 50 : ±3	51 ~ 200 : ±5	REV. 01	
201 ~ 400 : ±7	> 401 : ±10	SIZE A3	UNIT mm
ANGLES : ±1°		SCALE NONE	SHEET 1 of 1