


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

| REVISION |                        |          |          |
|----------|------------------------|----------|----------|
| REV.     | DESCRIPTION            | DATE     | APPROVED |
| B        | RoHS Compliancy        | 06-01-06 | DP       |
| C        | Notes Update           | 05-15-08 | DP       |
| D        | Updated Current Rating | 01-24-12 | LY       |

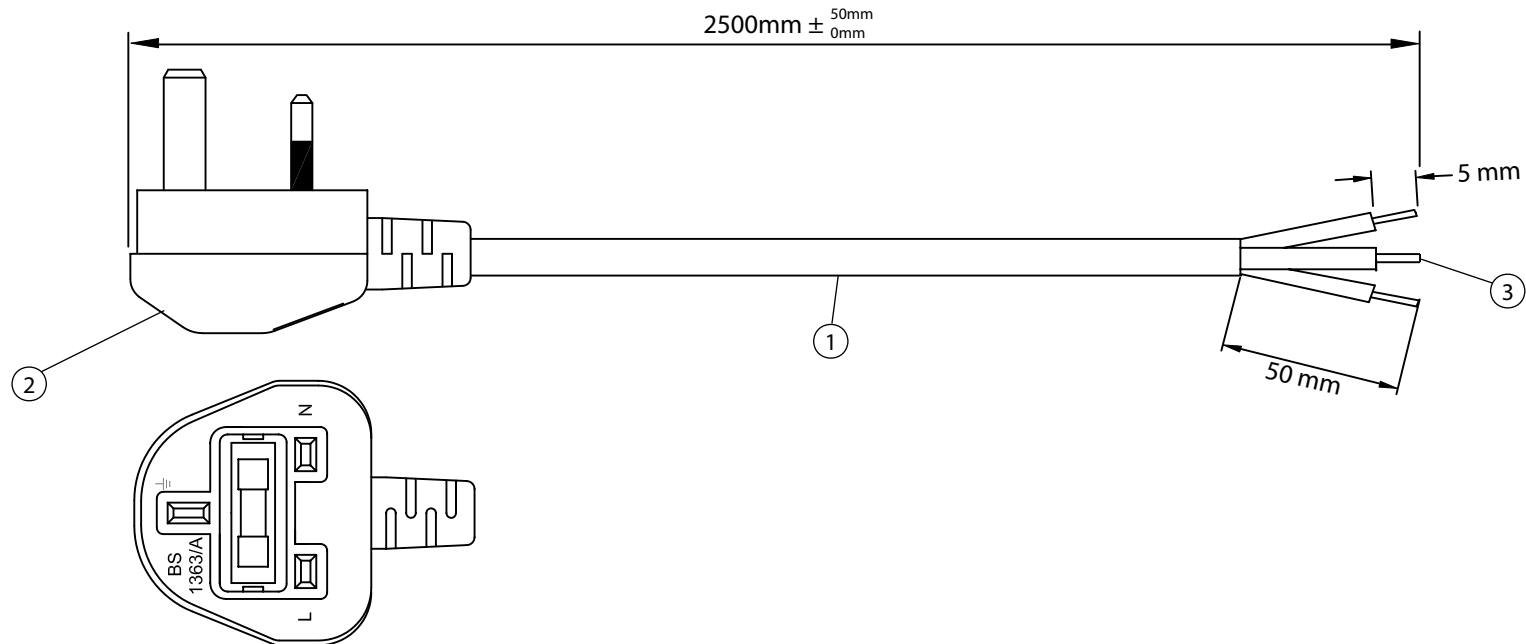

NOTES:

1. CORDAGE: H05VV-F, 3x0.75mm<sup>2</sup>, UNSHIELDED  
CEE COLOR CODE, TEMP. RATING: 70°C,  
RATING: 250V 5A, JACKET COLOR: BLACK
2. PLUG END: UNITED KINGDOM BS1363A WITH 13A FUSE
3. OTHER END: ROJ 50mm, STRIP 5mm
4. APPROVALS: UNITED KINGDOM
5. ROHS COMPLIANT

**CONTROLLED**

| Dim range (mm) |  | Tolerance +/- (mm) |  | <b>Qualtek Electronics Corp.</b><br>PPC DIVISION   |                |
|----------------|--|--------------------|--|--|----------------|
| 0-1            |  | 0.15               |  | Part Number: <b>369002-E01</b> <div style="border: 1px solid green; padding: 2px; display: inline-block;">RoHS Compliant</div> |                |
| 1-6            |  | 0.20               |  | Description: <b>POWER CORD</b>   |                |
| 6-18           |  | 0.30               |  |  |                |
| 18-50          |  | 0.50               |  | UNIT: mm <span style="float: right;">REV. D</span>   |                |
| 50-120         |  | 0.70               |  | Drawn / Date   | Checked / Date |
| 120-250        |  | 0.90               |  | 02-06-92   | 02-06-92       |
| 250-500        |  | 1.20               |  | Approved / Date  |                |
|                |  |                    |  | JJI / 02-06-92   |                |