
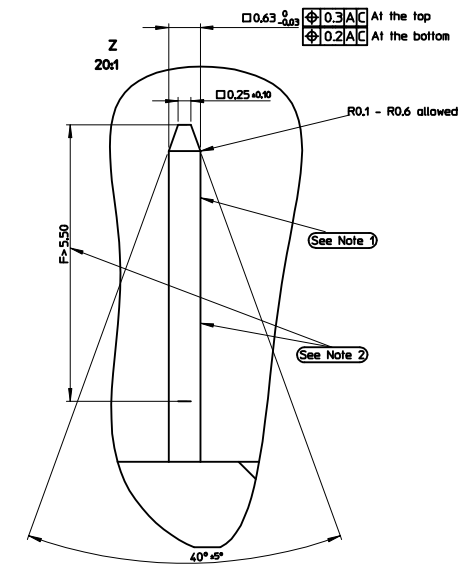
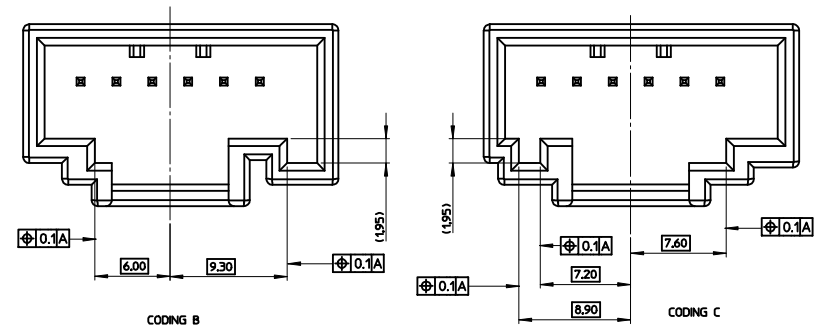
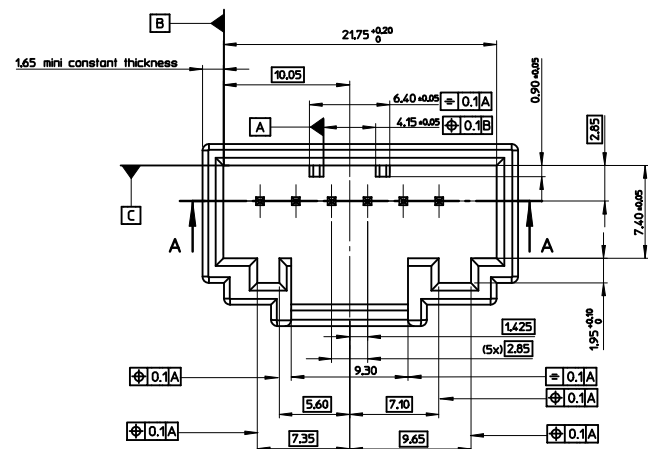
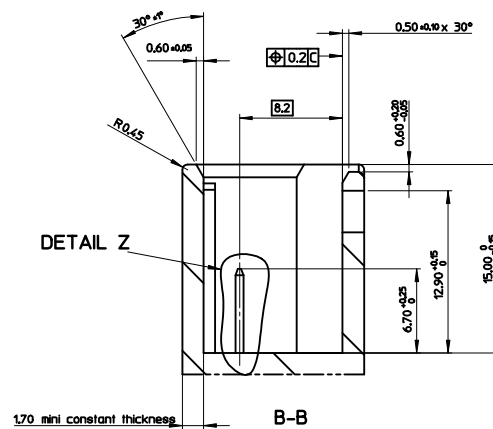
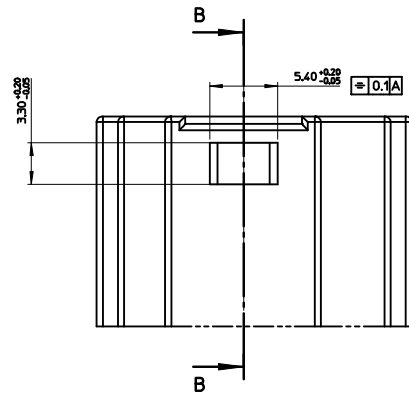


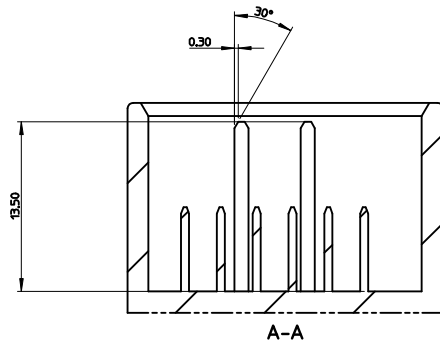

NOTES:

1: No burrs / No sharp edges allowed

2: Base material: copper alloy, IACS mini = 25%, tensile strength mini = 560N/mm2
Plating : 1 to 3 μm of pure tin (Sn)
13 μm mini of Nickel (Ni) underlayer
Minimum plating area = F

3: recommended plastic material: >PBT-GF15<

4: BLACK CODING A SHOWN.

5. MINIMUM PIN RETENTION FORCE = 40 N.

6. HEADER CODING A COMPATIBLE WITH MOLEX MATERIAL NUMBER 981930001.

FIRST RELEASE IEC NO: G2005-0303 DRAWN BY: JBERVAS CHECKED BY: JLDUCLOS APPROVED BY: LSTICKEIR DATE: 2005/04/20 DATE: 2005/04/20 DATE: 2005/04/20 A	QUALITY SYMBOLS 0 0 DESIGN NO. 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	FIRST ANGLE PROJECTION	
				MM ONLY		5:1	METRIC		
				DRAWN BY JBERVAS		DATE 2005/04/05	TITLE		
				CHECKED BY JLDUCLOS		DATE 2005/04/13			
				APPROVED BY LSTICKEIR		DATE 2005/04/14			
		MATERIAL NO.		N/A		DOCUMENT NO.		SHEET NO.	
		DRAFT WHERE APPLICABLE		N/A		SD-98193-004		1 OF 1	
		MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					