1-2308265-6 - ACTIVE

Rail D-Sub Backshells TE Internal #: 1-2308265-6 Rectangular Connector Hardware, Quick Lock Pins, -40 – 90 °C [-40 – 194 °F], Rail D-Sub Backshells

View on TE.com >

Connectors > Rectangular Connectors > Rectangular Connector Accessories > Rectangular Connector Hardware >

Quick Lock Pins for D-Sub with Threaded Inserts



Connector Hardware Type: Quick Lock Pins

Operating Temperature Range: -40 – 90 °C [-40 – 194 °F]

All Quick Lock Pins for D-Sub with Threaded Inserts (10)

Features

Mechanical Attachment



Connector Hardware Type Quick Lock Pins Isage Conditions -40 – 90 °C[-40 – 194 °F] Operating Temperature Range -40 – 90 °C[-40 – 194 °F] Product Compliance Suppliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU Compliant with Exemptions		
Isage Conditions -40 – 90 °C[-40 – 194 °F] Product Compliance or compliance documentation, visit the product page on TE.com> Compliant with Exemptions EU RoHS Directive 2011/65/EU Compliant with Exemptions EU ELV Directive 2000/53/EC Not Yet Reviewed China RoHS 2 Directive MIIT Order No 32, 2016 Restricted Materials Above Threshold EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.5% in Component Part)	Thread Size	None
Operating Temperature Range-40 – 90 °C[-40 – 194 °F]Product Compliance or compliance documentation, visit the product page on TE.com>Compliant with ExemptionsEU RoHS Directive 2011/65/EUCompliant with ExemptionsEU RoHS Directive 2000/53/ECNot Yet ReviewedChina RoHS 2 Directive MIIT Order No 32, 2016Restricted Materials Above ThresholdEU REACH Regulation (EC) No. 1907/2006Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.5% in Component Part)	Connector Hardware Type	Quick Lock Pins
Product Compliance or compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU Compliant with Exemptions EU EUV Directive 2000/53/EC Not Yet Reviewed China RoHS 2 Directive MIIT Order No 32, 2016 Restricted Materials Above Threshold EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.5% in Component Part)	Jsage Conditions	
EU RoHS Directive 2011/65/EU Compliant with Exemptions EU ELV Directive 2000/53/EC Not Yet Reviewed China RoHS 2 Directive MIIT Order No 32, 2016 Restricted Materials Above Threshold EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.5% in Component Part)	Operating Temperature Range	-40 - 90 °C[-40 - 194 °F]
EU ELV Directive 2000/53/ECNot Yet ReviewedChina RoHS 2 Directive MIIT Order No 32, 2016Restricted Materials Above ThresholdEU REACH Regulation (EC) No. 1907/2006Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.5% in Component Part)	or compliance documentation, visit the product page on TE.com>	
China RoHS 2 Directive MIIT Order No 32, 2016Restricted Materials Above ThresholdEU REACH Regulation (EC) No. 1907/2006Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.5% in Component Part)	EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.5% in Component Part)	EU ELV Directive 2000/53/EC	Not Yet Reviewed
(235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.5% in Component Part)	China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
	EU REACH Regulation (EC) No. 1907/2006	(235) Candidate List Declared Against: JUNE

1-2308265-6

Rectangular Connector Hardware, Quick Lock Pins, -40 – 90 °C [-40 – 194 °F], Rail D-Sub Backshells



Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



		and find	and fine
TE Part # 1-2308319-1 FULL METAL HOODS SIZE 1 (1)	TE Part # 1-2308330-1 FULL METAL HOODS SIZE 4 (1)	TE Part # 1-2308338-1 QL-FULL METAL HOODS SIZE 5 (1 CABLE CLP)	TE Part # 1-2308321-1 FULL METAL HOODS SIZE 2, (1)




Also in the Series | Rail D-Sub Backshells

1-2308265-6

Rectangular Connector Hardware, Quick Lock Pins, -40 – 90 °C [-40 – 194 °F], Rail D-Sub Backshells





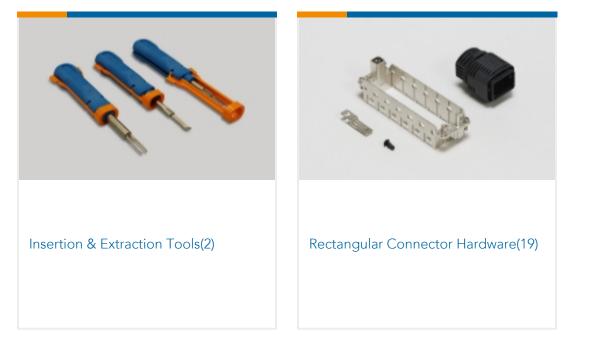

Customers Also Bought



TE Part #1625854-4 1206 PROBE PAD	TE Part #1-794613-1 PIN CONT 26-30 15 GOLD L/P	TE Part #1-2308319-1 FULL METAL HOODS SIZE 1 (1)	TE Part #1-2308273-2 QL-SET VARA W/STP MO FOR COMBLOCK 440UNC	
ETE	TE			
TE Part #1534809-1 HD20 COVER KIT25POS WITH CABLE	TE Part #1-2308321-1 FULL METAL HOODS SIZE 2, (1)	TE Part #EM6977-000 X4-0.6-0-SP	TE Part #FX1901-0001-0010-L COIN LOADCELL SENSON	

TE Part #3-5352115-0 Z-PACK/C RAF 55P

Documents

1-2308265-6

Rectangular Connector Hardware, Quick Lock Pins, -40 – 90 °C [-40 – 194 °F], Rail D-Sub Backshells



Product Drawings QL SET FOR VARIANT B 6

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2308265-6_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2308265-6_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2308265-6_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Rail D-Sub Backshells Flyer

English