
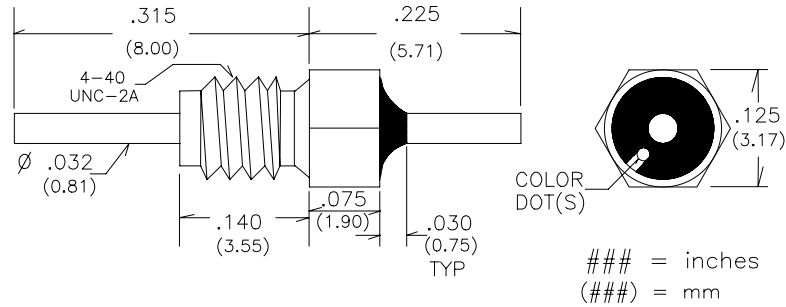


B3C100D
 MINI 4-40
 10pF Cap. Feed-Thru



- * RoHS Compliant
- * Discoidal Capacitor Construction

| PART NUMBER | EMI P/N | CAP. (pF) | COLOR DOT(S) | MAX. WVDC | DC AMPS | MINIMUM NO LOAD INSERTION LOSS | | | | |
|-------------|---------|-----------|--------------|-----------|---------|--------------------------------|--------|---------|-------|--------|
| | | | | | | 1 MHz | 10 MHz | 100 MHz | 1 GHz | 10 GHz |
| B3C100D | | 10 | VIOLET | 200 | 10 | - | - | - | 5 | 20 |

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .010" (.250mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: C12L14 CRS
 LEAD: Copper (1/2 Hard)
 FINISH: Silver per QQ-S-365

IDENTIFICATION & LIMITS

MARKING: Color Dot standard per chart
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 2.0 in*lbs

| | | | | | |
|--|--|--------------|--|-----|--|
| EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com | | | FILTER, EMI, MINIATURE, 4-40 THREADED BODY | | |
| FSCM NO. | | DWG NO. | | REV | |
| | | B3C100D REVD | | D | |