









PRODUCT NUMBER	DIM A	DIM B	NOTES
84620-XYLF	10.00	11.88	TOOLED

NOTES:

- SEE APPLICATION SPECIFICATION GS-20-010 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.
- UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5, 1994.
- MATERIAL : BODY : THERMOPLASTIC UL94-V0.   
: CONTACT : COPPER ALLOY.
- FOR PLATING PERFORMANCE REFER DRAWING # 10159408. 
- THE PRODUCTS PARTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004. 
- ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260° FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION
- 84620-XYLF.

'X' REFER DRAWING # 10159408 

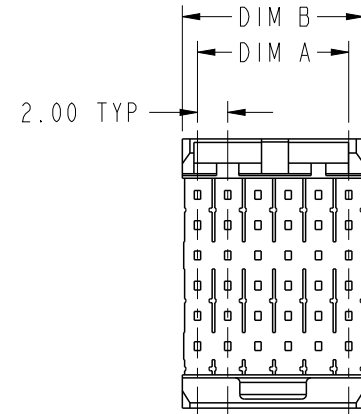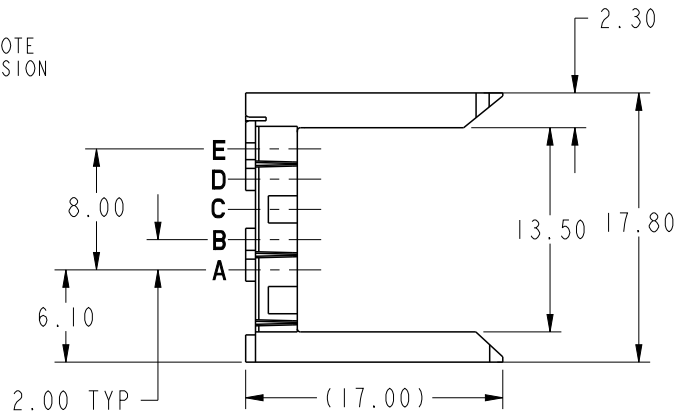

spec ref		dr P-Mathew Nebu 2011/05/20		projection 	MM ←→	size A4	scale 2:1	
tolerance std ISO 406 ISO 1101		eng Narayanan, Aru 2021/02/03				ecn no ELX-I-39903-1	rel level Released	
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr - -				product family METRAL 1000/2000		
surface 3.200	linear	0.X	±0.3	Amphenol FCi	title VERTICAL SIGNAL HDR SHROUD	dwg no 84620	rev E	
ISO 1302		0.XX	±0.13					
	angular	0°	±2°					amphenol-icc.com