


COIL: @ 25°C  
 RESISTANCE 330 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.0 VDC  
 MUST RELEASE 2.0 VDC MIN.

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 13 MS MAX.  
RELEASE TIME 5 MS MAX.  
CONTACT BOUNCE 5 MS MAX. (NC)  
2 MS MAX. (NO)

**CUSTOMER DATA SHEET**

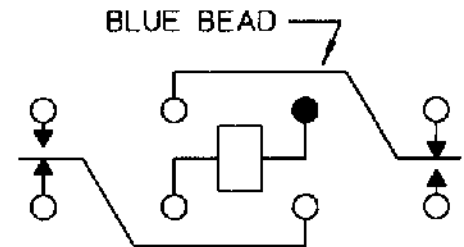

CONTACT RATING: 10 AMPS 30 VDC RES.  
10 AMPS 115 VAC 400 Hz, 6A 30 VDC  
INDUCTIVE 100,000 OPERATIONS

DR. R.B. 10/25/95 CK. 10/27/95 JB


**COMMUNICATIONS  
INSTRUMENTS, INC.**

CUST. HI-G  
 CUST. NO. 2T-2B-126

TYPE "07" RELAY

**B07B935BZ1-8015**