


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00129	Connector, dc plug, 5.5x2.5xL18.5 mm, molding style, spring contacts	1	
2	30-00683	Wire, 2C TS, 18 AWG, UL2464, 300V, 80C, 5.2 mm, VW-1, PVC	1	
3	24-00185	Overmold, dc plug, 5.5 mm, 90°, Tensility	1	PVC, black

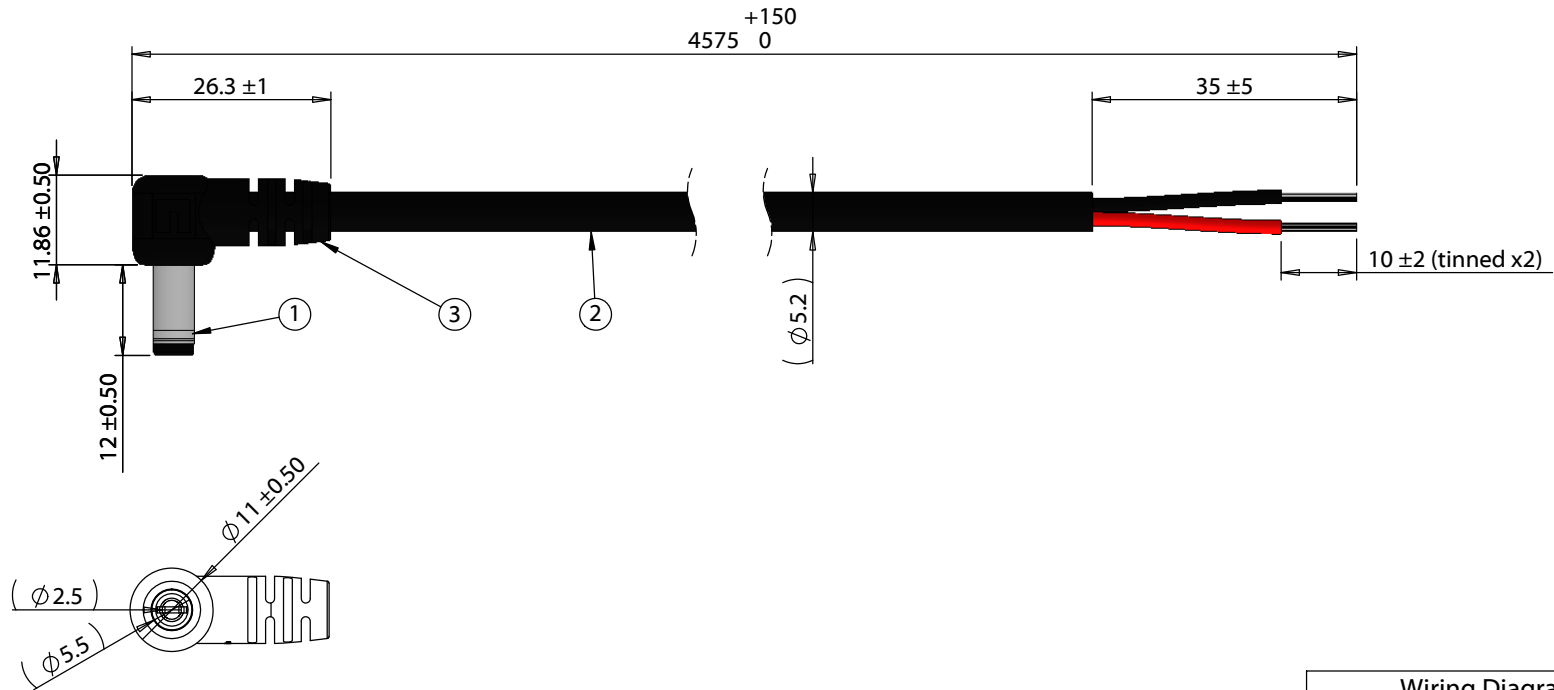

Notes:
Functionally equivalent components may be substituted
Cable rated for 48 V, 7 A

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>				
A	06/07/2019	Initial release	JC <small>Digitally signed by JC Date: 2020.04.08 17:00:06 -07'00'</small>	RoHS compliant					
			Verified: AW <small>Digitally signed by AW Date: 2020.04.09 09:24:30 -07'00'</small>	Function test: no open, no short circuit, no intermittent	<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>10-03373</td> </tr> </table>	Size:	Part number:	A	10-03373
Size:	Part number:								
A	10-03373								
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 4575 mm, 5.5x2.5x12 mm 90° 50-00129 dc plug to stripped tinned, 18 AWG, 30-00683 wire	Scale: 1:1				

5

4

3

2

1