
-		 		
	دی ا	 111	0	0





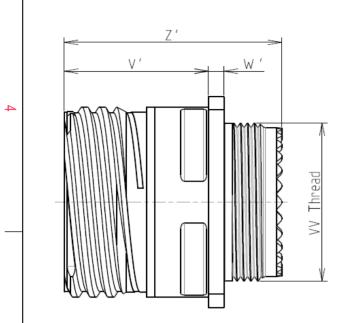

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
Ν	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 2000 hours			
	-Mass	: 13.4 g ± 10%			

8D 0

G

11

Μ

05

S

F

А

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M15x1-6g


ORIENTATION : A

CONTACT LAYOUT : 11-05

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

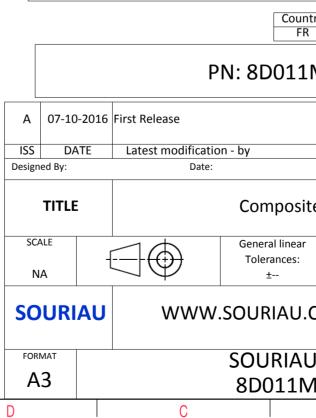

	Ξ		A		
					4
AS EXA	AMPLE				3
anv	non-conformit	y or damage			
s whic er of t	ch does not co che Parties or t on, technical n	mply with by a third par	ty		
untry FR	Jurisdiction & Control List Not Listed				2
1M	105SA				
	1	CUCTO C		MOD N°	
site	Receptacl		R DRAWING ES		
ar	NPRDS / PROJECT				
			59		1
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET	
MC	05SA-C			1/2	J
	В		А		

r	τ	۵	н П	m	D	0	
		Contact Layout				Pa	anel Cutou
4	-×	$\stackrel{E \bigoplus \cdots \bigoplus^{A}}{\cdots} \cdots \xrightarrow{D \bigoplus \cdots} \cdots \longrightarrow $			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conta positi ID A B C D E Shell Arrangement Numl size no. cont	Non X-axis (mm) Y-axis (mm) + 0.65 (1.65) +.056 (1.42) + 1.13 (2.87) 065 (1.65) + 0.00 (0.00) 130 (3.30) 113 (2.87) 065 (1.65) 065 (1.65) +.056 (1.42) ber of Size Service Contactt Supersedes tacts contacts rating location Supersedes				ØA ØA	2 2 <u>7</u>
ى ى	11 -5 5	5 20 I All MS20050-5				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	oducts whi y either of
N						PN: 8[Country FR
					A 07-10-2	2016 First Release	
					ISS DAT Designed By:	E Latest modification - by Date:	
					TITLE	Cor	nposite
_					SCALE NA	-{	ral linear erances: ±
					SOURIA	WWW.SOUF	RIAU.C
				_	FORMAT A3		JRIAU 011M
l	Н	G	F	E	D	C	

