

Engineering/Process Change Notice

ECN/PCN No.: R0045

For Manufacturer								
Product Description: GPS Active Antenna Module	Abracon Part Number	-	□ Documentation only□ ECN⋈ EOL	☐ Series ☑ Part Number				
Affected Revision:	New Revision:		Application:	☐ Safety				
Rev B	EO	L		Non-Safety				
Prior to Change:								
N/A								
After Change:								
EOL								
Cause/Reason for Change:								
Discontinued by factory due to EOL for LNA								
Change Plan								
Effective Date: 06/18/2021	Additional Remarks: N/A							
Change Declaration: EOL								
Issued Date: 06/18/2021	Issued By: Nicholas El-Takach		Issued Department: Engineering					
Approval:	Approval:		Approval:					
Syed Raza	Reuben Quintanilla		Ying Huang					
Engineering VP	Quality Director Purchasing Director							
For Abracon EOL only								
Last Time Buy (if applicable): No last time buy.	Alternate Part Number / Part Series: N/A							
Additional Approval:	Additional Approval:		Additional Approval:					
Additional Approval.			Additional Approval.					
	Customer Appro	val (If Applicable)						
Qualification Status: ☐ Approved ☐ Not accepted								
Note: It is considered approved if there is n	o feedback from the cu	istomer 1 month afte	r ECN/PCN is released.					
Customer Part Number:		Customer Project:						
Company Name:	Company Representative:		Representative Signature:					
Customer Remarks:								

Form #7020 | Rev. G | Effective: 02/22/2021 |













GPS Active Antenna Module - Adhesive Mount

APAMP-114

RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)



MSL level: Not Applicable

FEATURES:

- High Reliability/Sensitivity
- Compact Size
- Easy to install (adhesive base tape)
- ROHS Compliant

> TYPICAL APPLICATIONS:

- Automotive Navigation
- Automotive Monitoring
- Personal Tracking

> STANDARD SPECIFICATIONS:


Antenna

Parameters	Min.	Тур.	Max.	Units	Note
Frequency	1574.40	1575.42	1576.44	MHz	
Bandwidth	5.0			MHz	
VSWR at Center Frequency			1.5:1		
Polarization Model	RHCP			(Right Hand Circular Polarization)	
Impedance		50		Ω	
Gain		1		dBic	(Based on 70× 70mm ground plane)
Operating Temperature	-40		+80	°C	
Storage Temperature	-45		+85	°C	

Low Noise Amplifier (LNA)

Parameters	Min.	Тур.	Max.	Units	Note
Frequency	1574.40	1575.42	1576.44	MHz	
DC Voltage	2.5		6.0	V	
Gain	24	26	28	dB	$(+25^{\circ}C \pm 10^{\circ}C)$
Output VSWR			2.0		
Noise Figure			1.6		$(+25^{\circ}C \pm 10^{\circ}C)$
DC current		11	13	mΑ	(At 5.0V)

> ANTENNA'S IMPEDANCE AND RETURN-LOSS CHARACTERISTICS

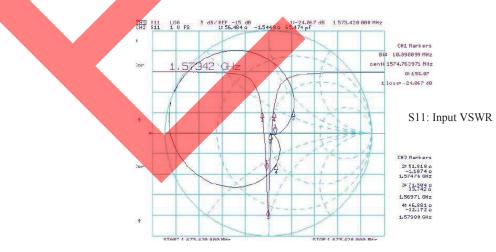

Test condition: 15x15mm ground






GPS Active Antenna Module - Adhesive Mount

APAMP-114


RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)



LNA REFLECTION PROFILE

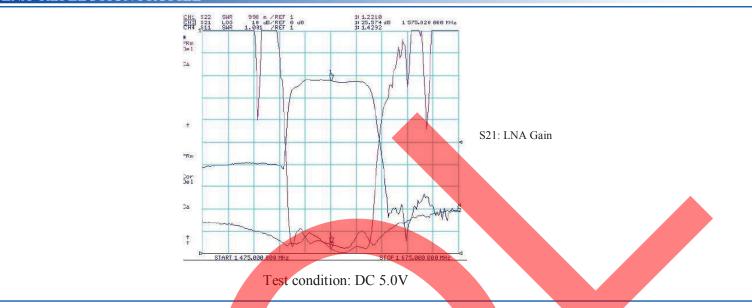

OUTLINE DRAWING:

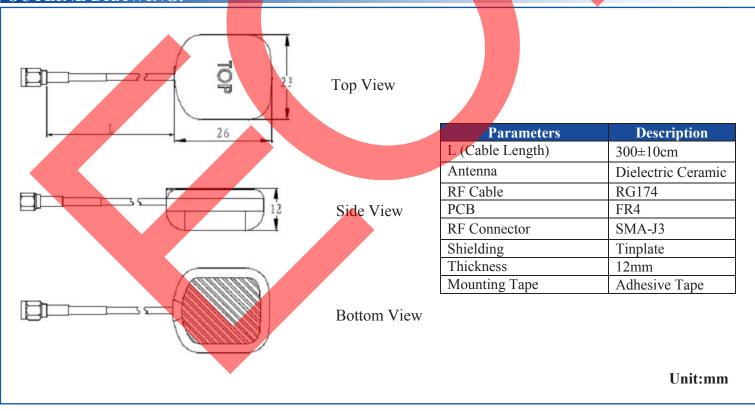



GPS Active Antenna Module - Adhesive Mount

APAMP-114

RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)



PRODUCT IMAGE:



PACKAGING:

Each 475 x 215 x 215 mm size carton includes 100 pieces of antenna.





CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



