


| TRS AND TRS WIRING CHART | | | | | | | |
|--------------------------|---------------------|------------------|-------|--------|------------------|-------|--------|
| JACKET COLOR | H.S. TUBING MARKING | END "A" TRS PLUG | | | END "B" TRS PLUG | | |
| | | RED | BLACK | BARE | RED | BLACK | BARE |
| BROWN | CHANNEL 1 | TIP | RING | SLEEVE | TIP | RING | SLEEVE |
| RED | CHANNEL 2 | TIP | RING | SLEEVE | TIP | RING | SLEEVE |
| ORANGE | CHANNEL 3 | TIP | RING | SLEEVE | TIP | RING | SLEEVE |
| YELLOW | CHANNEL 4 | TIP | RING | SLEEVE | TIP | RING | SLEEVE |
| GREEN | CHANNEL 5 | TIP | RING | SLEEVE | TIP | RING | SLEEVE |
| BLUE | CHANNEL 6 | TIP | RING | SLEEVE | TIP | RING | SLEEVE |
| PURPLE | CHANNEL 7 | TIP | RING | SLEEVE | TIP | RING | SLEEVE |
| GRAY | CHANNEL 8 | TIP | RING | SLEEVE | TIP | RING | SLEEVE |

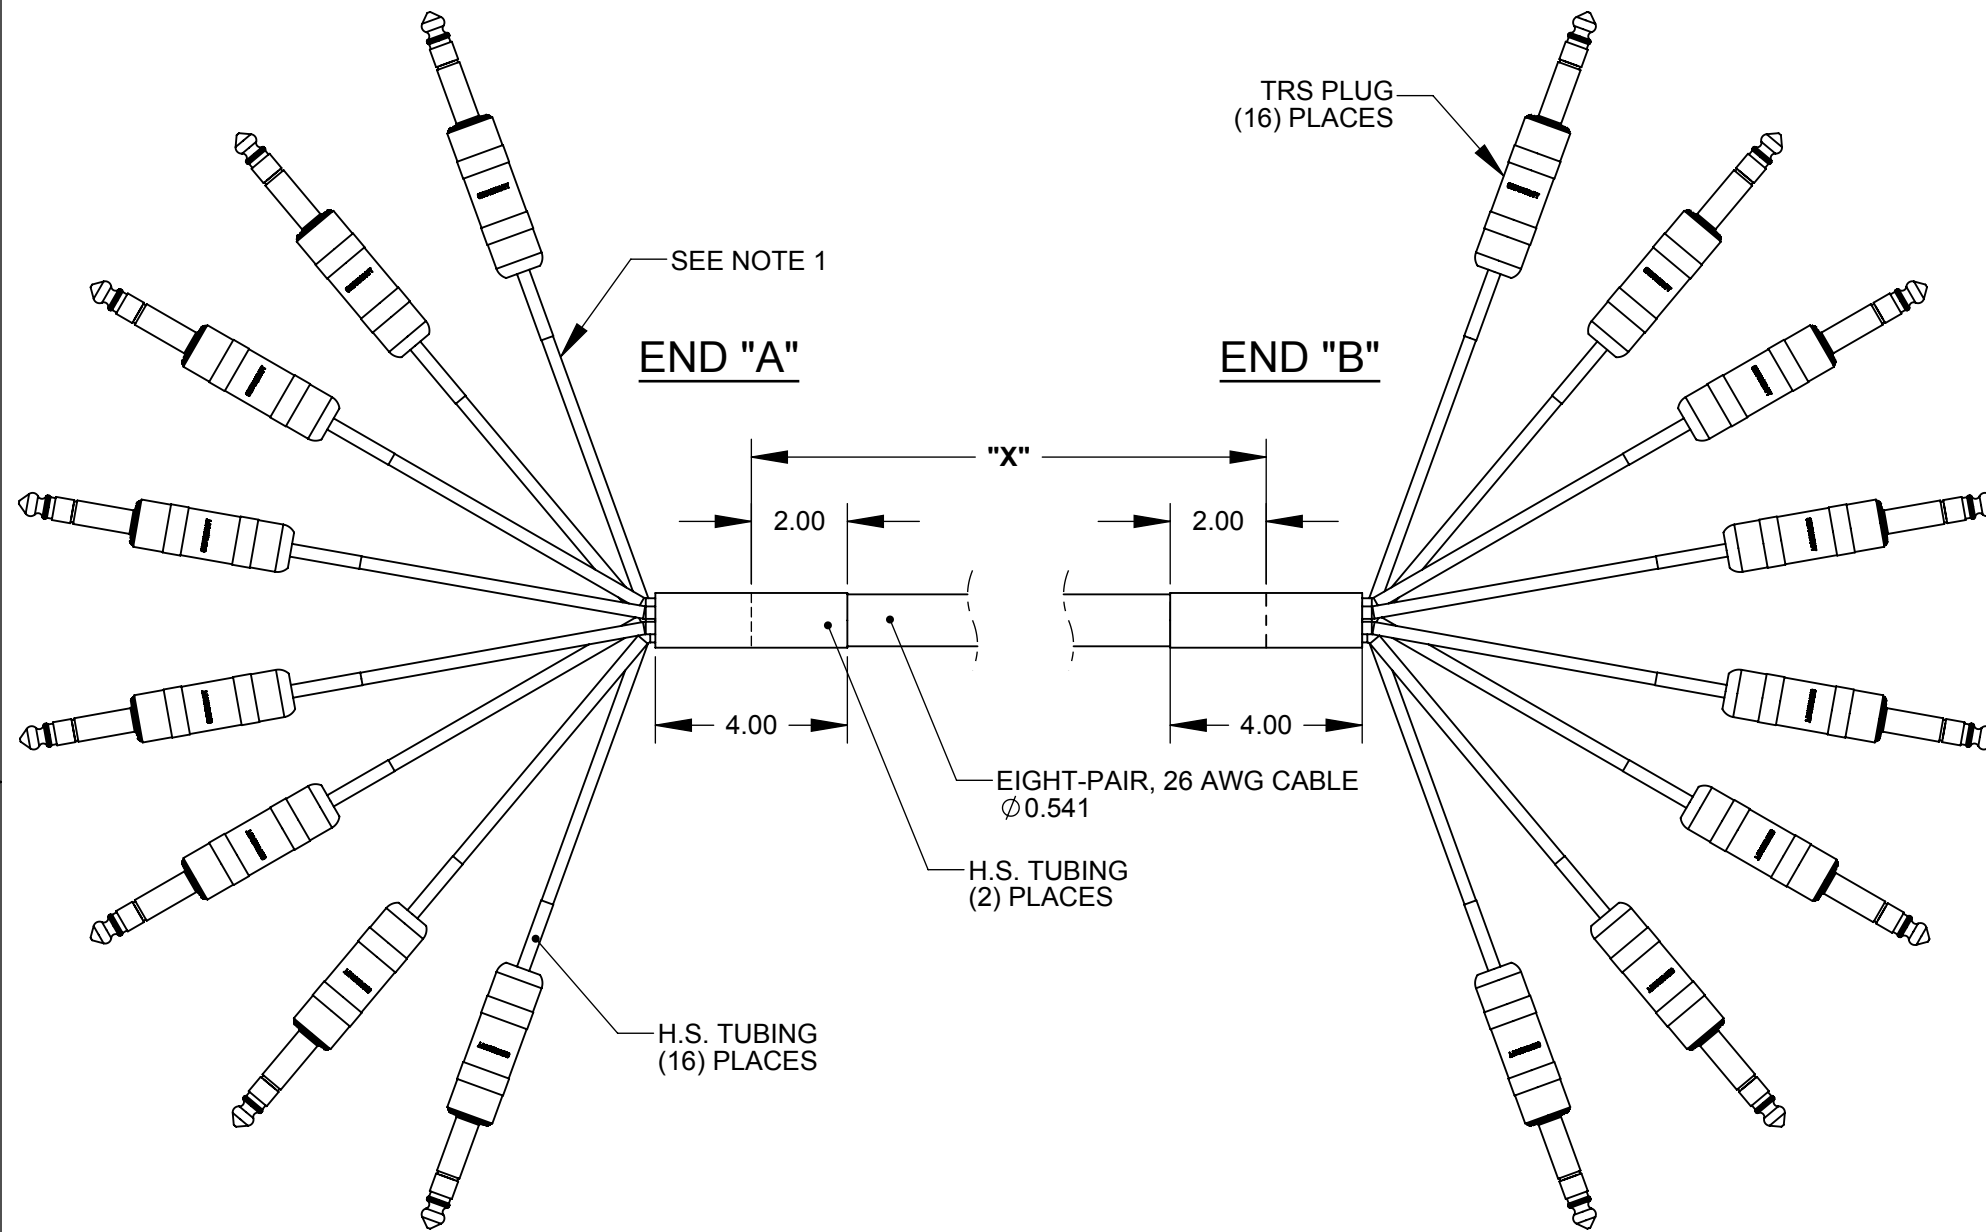

| PART NUMBER | CABLE LENGTH "X" |
|-------------|----------------------|
| TRS05TRS | 5.00 FT +/- 1.50 IN |
| TRS10TRS | 10.00 FT +/- 1.50 IN |

CUSTOMER DRAWING

NOTES:

- BREAKOUT CABLE LENGTH IS 18.00 +/- 0.75 IN.
- CABLE IS SHIPPED COILED AND PACKAGED IN A BAG.
- MATERIALS:
 CABLE - COPPER, THERMOPLASTIC
 TRS PLUG:
 INSULATING WASHERS - THERMOPLASTIC
 PLUG BODY AND TIP ROD - COPPER ALLOY, NICKEL PLATED
 INSULATORS - MYLAR
 TERMINALS - COPPER ALLOY, ELECTRO-TINNED
 HANDLE - COPPER ALLOY, NICKEL PLATED
- THIS PRODUCT IS RoHS COMPLIANT.

| REV | ECO NUMBER | DATE | BY | APVD |
|-----|------------|----------|----|------|
| B | 26637 | 10/11/10 | RS | TJK |
| A | 25983 | 10/30/08 | RS | TJK |

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
 - TWO PLACE DECIMALS ±0.02
 - THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

| | | | | | | | |
|--|-------|------|-----------|-------------------|--|-----|--|
| THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY. | | | | | | | |
| SIZE | WIDTH | MULT | LBS/M | TEMPER | | | |
| FINISH SPEC No. | | | | MATERIAL SPEC No. | | | |
| FIRST USED ON | | | SCALE 1:2 | | | | |
| DATE DRAWN | BY | CHKD | APVD | | | | |
| 4/14/08 | JGK | RS | TJK | | | | |
| | | | 12/28/10 | 12/28/10 | | | |
| NAME | | | | PART No. | | REV | |
| TRS PLUG TO TRS PLUG, RoHS | | | | TRS_ _TRS | | B | |