


### General information

Part number	S14LOC-P07MTS9-9200
Termination	solder
Size	4
Locking principle	push
Coding	0_key
Cable Diameter	cable_mini_92
Cable outlet	standard

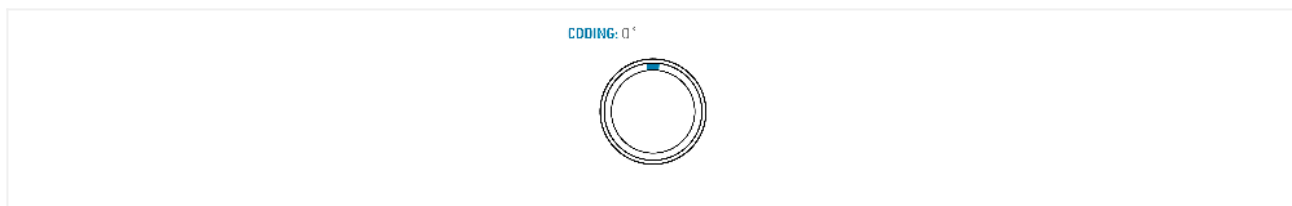

### Contact insert description

Number of contacts	7
Contact type	pins
Contact diameter	20mm
Insulator material	peek
Wire cross section	12_awg
Termination	solder
Termination diameter	24mm

reverse\_gender\_on\_request

### Technical information

Max. creepage and air clearance distance	15_mm	16_mm
Nominal current single contact	24_a	iec_60512_5_2
Nominal current insert	15,6 A	vde_0298_4
Test voltage	135_kv_ac	sae_13441

safety\_text

### Mechanical and environmental data

Degree of protection*	ip50
Operating temperature	40_120_c
Mating cycles	5000

mated\_unmated

## Material and surface treatments

<b>Housing</b>	m_chrome
<b>Contact</b>	cu_alloy_gold

safety\_text\_2  
ul\_text  
illustrative\_text