## Customer Information Sheet

DRAWING No.: Z80-255, Z80-244, Z80-259


IF IN DOUBT - ASK

 $\mathcal{C}$ 

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

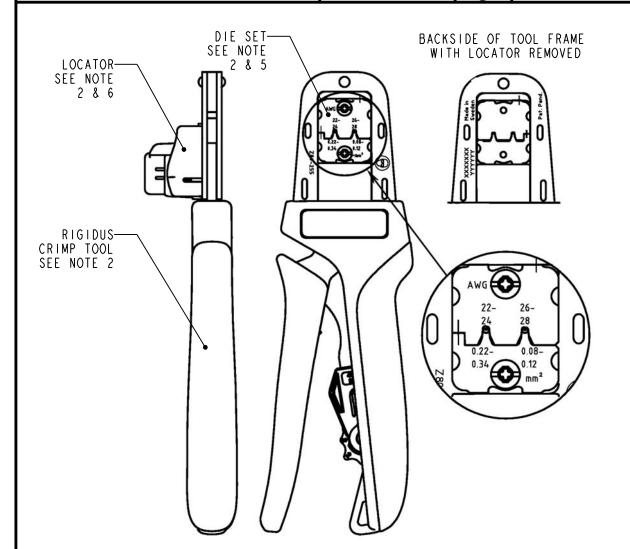

## NOTES:

I) FOR DETAILED OPERATING INSTRUCTIONS AND COMPATIBLE COMPONENTS, SEE INSTRUCTION SHEETS IS-27, AND IS-46 AVAILABLE AT:

http://www.harwin.com/resources/design/

HARWIN RECOMMEND THE USE OF BS 3G 210 TYPE A PTFE EQUIPMENT WIRE, SEE IS-46.

- 2) HAND CRIMP TOOL Z80-255 COMPRISES OF RIGIDUS CRIMP TOOL, LOCATOR Z80-259 AND DIE SET Z80-244.
- 3) RIGIDUS CRIMP TOOL, LOCATOR AND DIE SET SUPPLIED ASSEMBLED AND BOXED.
- 4) HAND CRIMP TOOL SUPPLIED WITH SHORT FORM OPERATING INSTRUCTIONS.
- 5) FOR REPLACEMENT DIE SET, USE PART NUMBER Z80-244.
- 6) FOR REPLACEMENT LOCATOR, USE PART NUMBER Z80-259.

RA	2	06.03	. 20	2157	2	
NAME	188.	DAT	Ε	C/NOT	Ε	
APPRO	OVED:	R.AL	R.ALEXANDER			
CHECKED:		M.RUDKIN				
DRAWN:		В. М	I. K	ENT		
CUSTOMER REF.:						
ASSEM	IBL Y	DRG:				

MARWIN

www.harwin.com technical@harwin.com THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT

THEIR WRITTEN PERMISSION

TOLERANCES

X. = ± Imm
x x = ±0.50m

 $X.X = \pm 0.50 mm$   $X.XX = \pm 0.20 mm$  $X.XXX = \pm 0.01 mm$ 

ANGLES = ±5°
UNLESS STATED

MATERIAL:

S/AREA:

CINICU

FINISH: DRAWII

mm<sup>2</sup>

TITLE: DATAMATE TRIO-TEK
FEMALE CONTACT
HAND CRIMP TOOL AND SPARES

DRAWING NUMBER:

Z80-255,

Z80-244 & Z80-259

SHT 3 OF