


NOTE:

1. MATERIAL,
HOUSING: HIGH TEMP THERMAL PLASTIC, UL94-V0
TERMINAL: COPPER ALLOY
2. FINISH:
TERMINAL: 40u" MIN Ni UNDER PLATING
3. SPEC.:
PRODUCT SPEC: GS-12-629
PACKING SPEC: GS-14-1517
4. THE HSG. WILL WITHSTAND EXPOSURE TO 260C
PEAK TEMP. FOR 10 SEC. IN A WAVE SOLDER APPLICATION.
5. MATING SIDE LENGTH: 2.5MM MIN.
6. PRODUCT NUMBERING:
20021822 - XXX XX X X LF

- LEAD FREE
- PLATING:
0: 80~200u" TIN ALL OVER
1: GOLD FLASH ALL OVER
4: 10u" GOLD AT CONTACT, G/F ON THE OTHER AREA.
8: 30u" GOLD AT CONTACT, G/F ON THE OTHER AREA.
- PACKING
T: TUBE
- PIN COUNT
04, 06, 08, ..., 98, A0
(EVERY EVEN PIN)
- STACK HEIGHT "K"
EXAMPLE: 045=4.5MM
IN 0.5MM INCREMENT

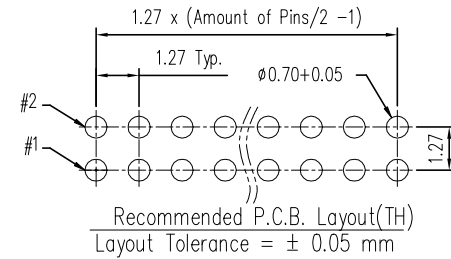

mat'l. code		surface ASME Y14.5		tolerance ASME Y14.5		projection mm		product family MINITEK 1.27	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title VERTICAL STACK HEADER	
B	ELX-N-30567	TONY	2018-06-28	angled	.0±.38	mm		dwg no 20021822	
				0°±x'	.00±.25	scale N.T.S.		sheet 1 of 1 size A4	
				dr	STERLING LIN	10'-5-20		type Product Customer Drawing	
				eng	STERLING LIN	10'-5-20			
				chr	STERLING LIN	10'-5-20			
				app	GARY HSIEH	10'-5-20			
sheet index	revision sheet	B	1						