
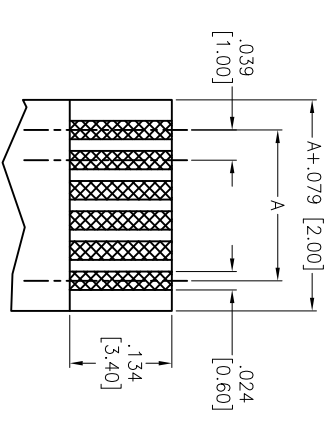
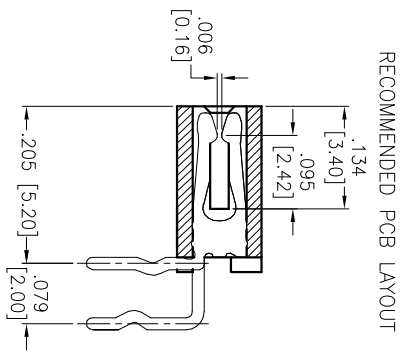
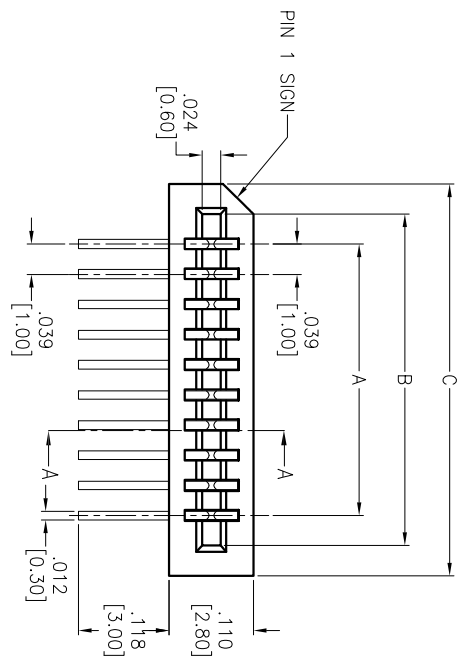
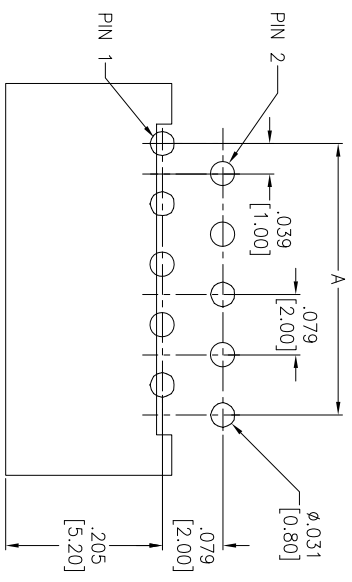


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	
A		REDRAWN	2/6/15	AV/LL

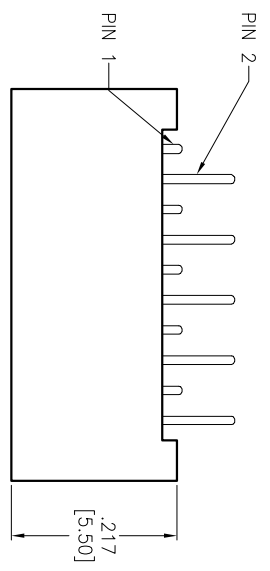

**SPECIFICATIONS:**

Material: HI-Temp Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze

Plating: Tin over Nickel underplate overall

Operating voltage: 50 VAC max  
 Current rating: 0.5 Amps max

Contact resistance: 30 mohms max initial  
 Insulation resistance: 500 Mohms min  
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:  
 Operating temperature: -20°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant

Positions: 3 thru 30  
 A = .039 [1.00] x No. of Spaces  
 B = A + .083 [2.10]  
 C = A + .157 [4.00]

FPC/FCC T: .012±.002 [0.30±0.05]

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

LIF FLEX CIRCUIT CONNECTOR  
 SIDE ENTRY, 2.00 MM PCB ROW SPACING

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	10/4/04
CHECKED AY	7/28/10
APPROVED	

SIZE	PART NO.	REV.
X	PCB-C-XX-SA-20	A
REF:	S00Q3T	SHEET 1 OF 1
SCALE:	NIS	

