

т	۵	п	m	0



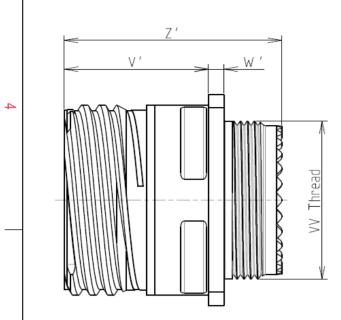



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 14.1 g ± 10%

8D 0

G

13

J

08

Ρ

F


С

Connector dimension				
Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V'	19.5+1.4/-0			
W'	2.1/3.65			
Ζ'	32 Max			
VV THREAD	M18x1-6g			

CONTACT TYPE : PIN(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

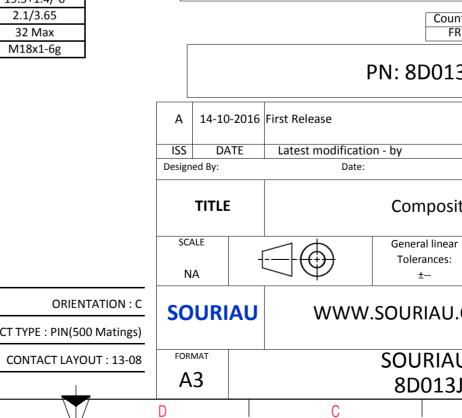

	Ξ		A		
					4
					3
S EXA	AMPLE				
s whic er of t	non-conformit h does not co he Parties or t n, technical n	mply with by a third part	У		
untry FR	Juriso	liction & Cont Not Listed	rol List]	2
.3J(3J08PC				
		CUSTOME		MOD N°	
site	ite Receptacle 8D series				
ar			PROJECT		
			59 ument is the pror	perty of	1
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	U DRG N° SHEET				
2010	BPC-C		A	1/2	J

		۵	ات	m		0
		Contact Layout				Panel Cutout
4	-x	$ \begin{pmatrix} \mathbf{F}^{\mathbf{F}} \\ \mathbf{F} \\ \mathbf{F}$			٨	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Con posi II A E CC C C C E F G G C C	Uion D X-axis (mm) Y-axis (mm) A +.065 (1.65) +.157 (3.99) B +.170 (4.32) +.000 (0.00) C +.120 (3.05) 120 (3.05) D .000 (0.00) 170 (4.32) E 120 (3.05) 120 (3.05) 170 (4.32) +.000 (0.00) B 065 (1.65) +.157 (3.99)			2	
ယ		mber of Size Service Contact Supersedes ntacts contacts rating location 8 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
23						Country FR PN: 8D013J
					A 14-10-20 ISS DATE Designed By:	116 First Release
_					TITLE SCALE NA	General linear Tolerances:
					SOURIA	
		1	1		FORMAT A3	SOURIAU 8D013J0
	Н	G	F	E	D	C

