HDB 15 Male
Plastic: Blue



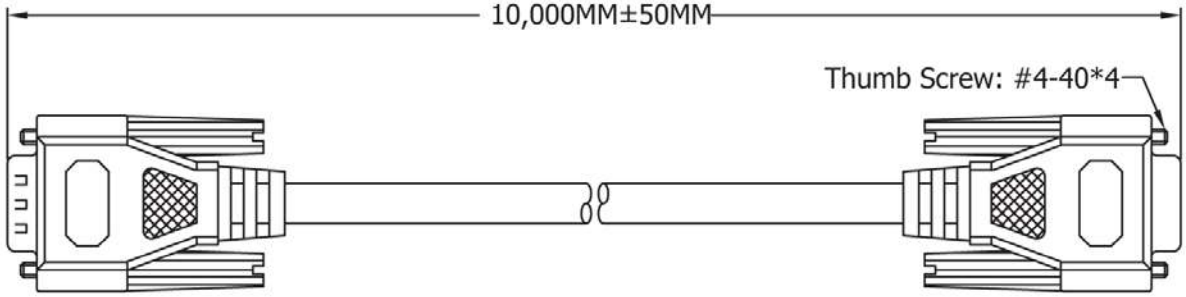

HDB 15 Female
Plastic: Blue



PIN OUT

Material:

1. CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE+SPIRAL INNER JACKET:PVC OD: 2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C) *7C+INSULATION:SR-PVC ID: 0.9± 0.05mm(UL-1061)+AL/MYLAR+DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR:BEIGE, OD: 8.5± 0.15mm UL-2919 APPROVED
2.CONNECTOR:
P1:HDB 15P MALE,THE 9TH PIN IS EMPTY,GOLD FLASH CONTACT, NICKEL PLATED SHELL
P2:HDB 15P FEMALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
4.SHIELD:P1 & P2 COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
5.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
6.ELECTRICAL TEST:
<1>.100% OPEN SHORT & MIS WIRE TEST
<2>.CONTACT RESISTANCE 3 OHMS MAX
<3>.INSULATION RESISTANCE 20M OHMS MIN
7.PACKING:SEE P-0039 REV.C PACKING DRAWING (HANKING SIZE MUST BE SMALLER THAN BLISTER)

RoHS Complaint

Scale	1:1						Name
TOLERANCE							
X.X	±0.40			Drawn	11.16.11		Chappell
X.XX	±0.25			Approved			
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		

ASSMANN WSW components

Item No.
AK3750X

Title
Premium XGA Monitor Extension Cable - HD D-Sub 15 pin Male <=> Female, 10 Meters

Drawing No.

rev00

Replace

Sheet