

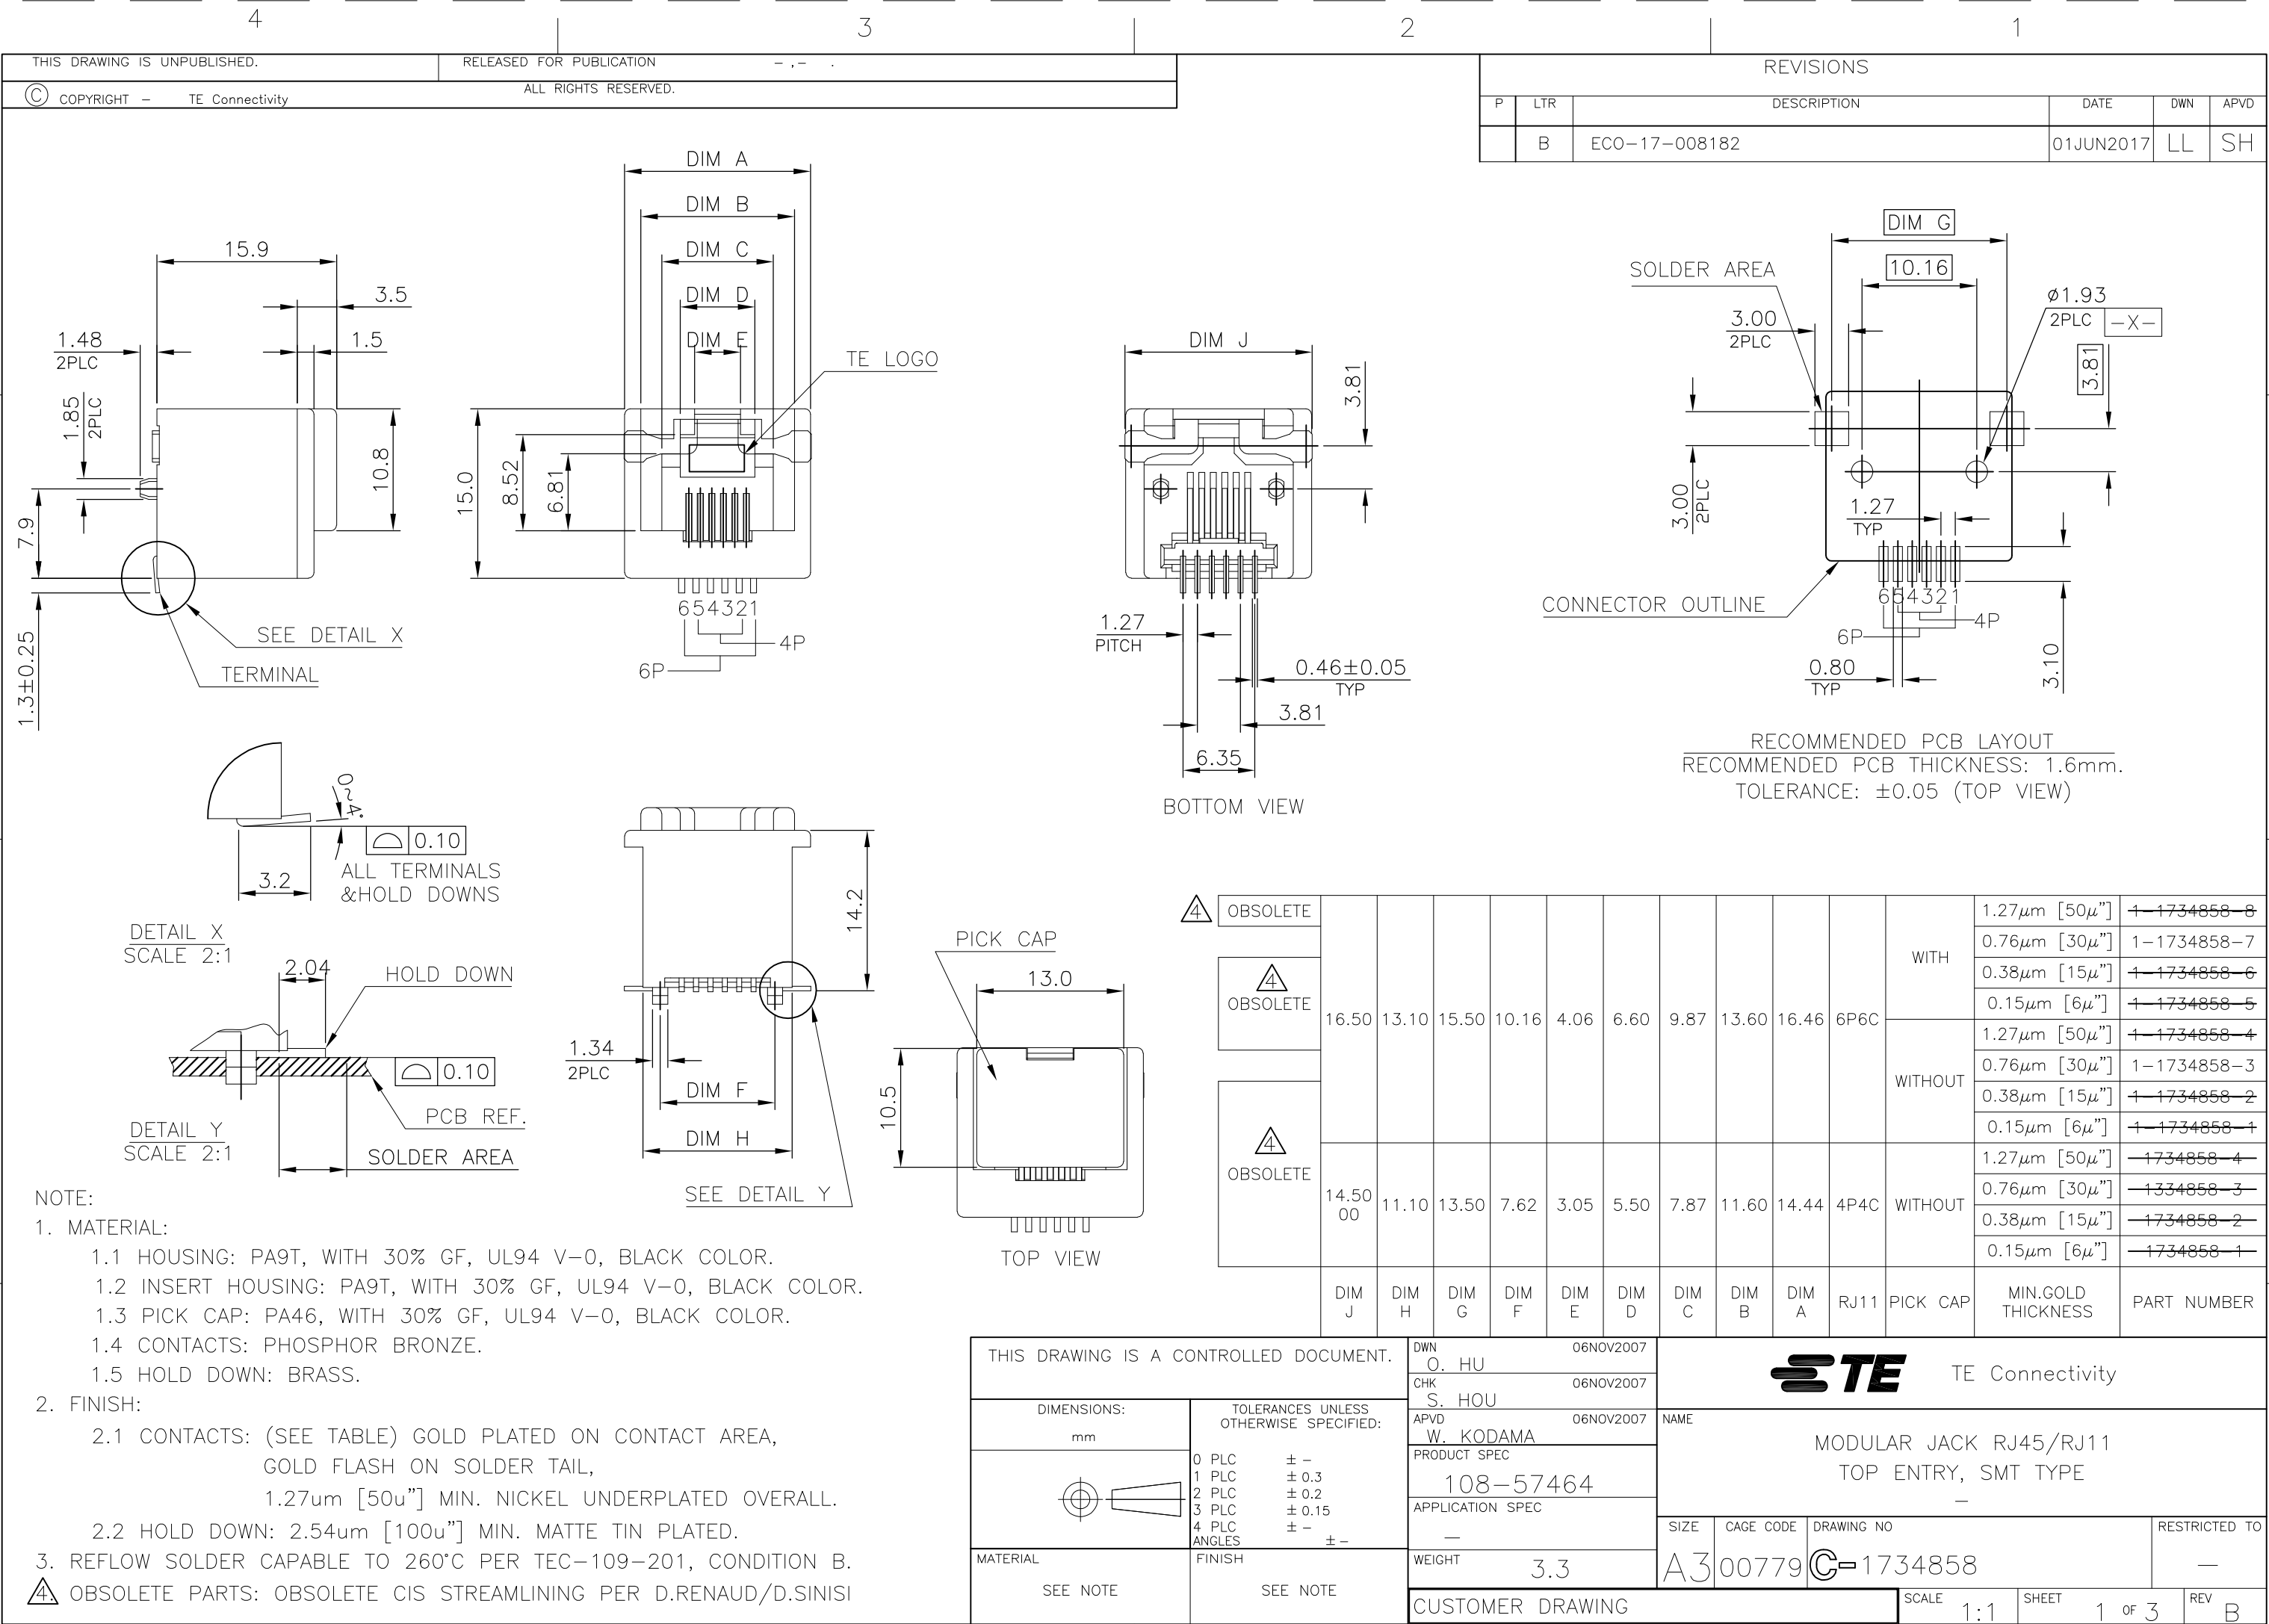
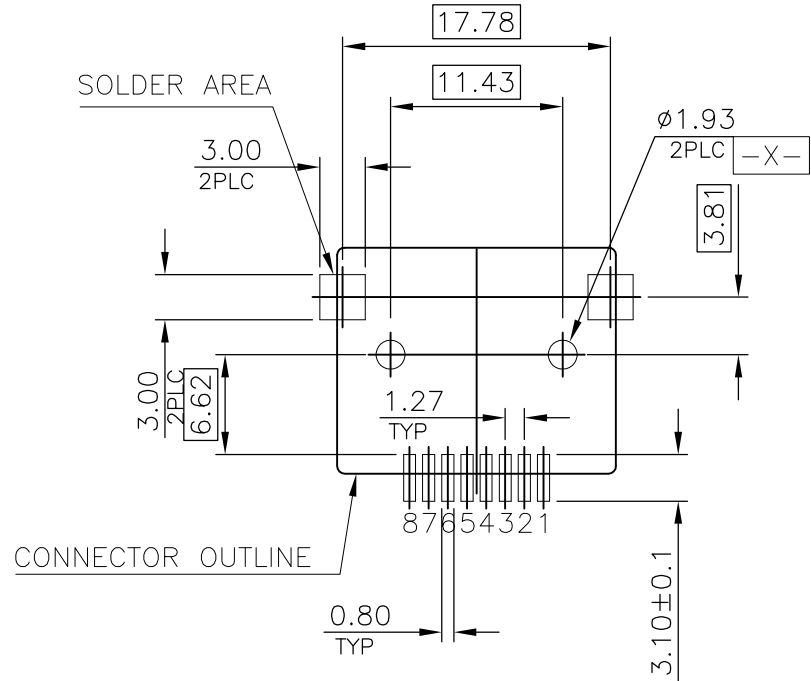
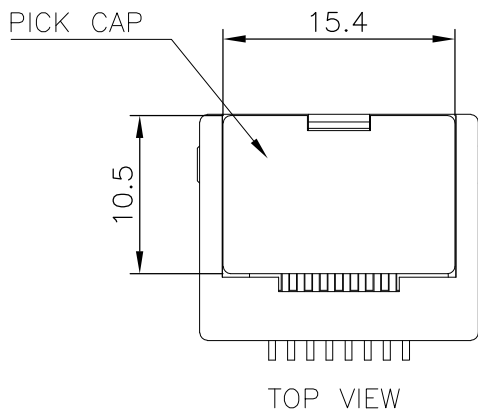
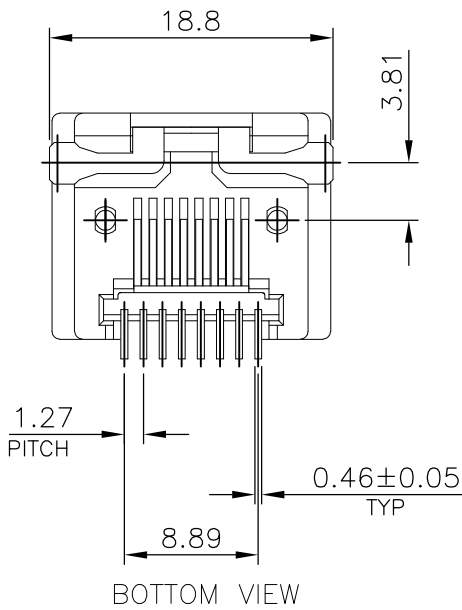
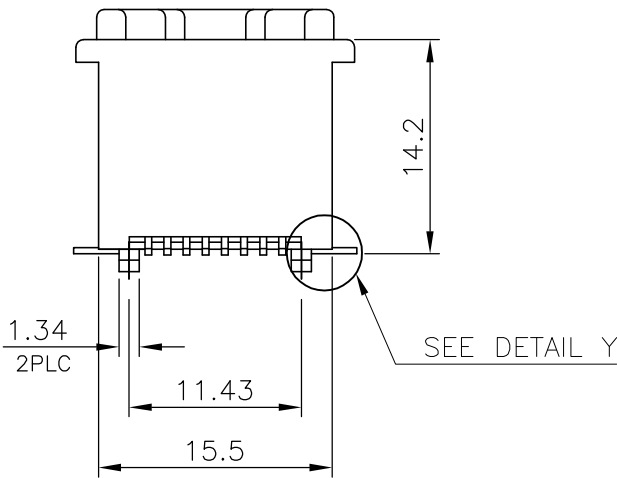


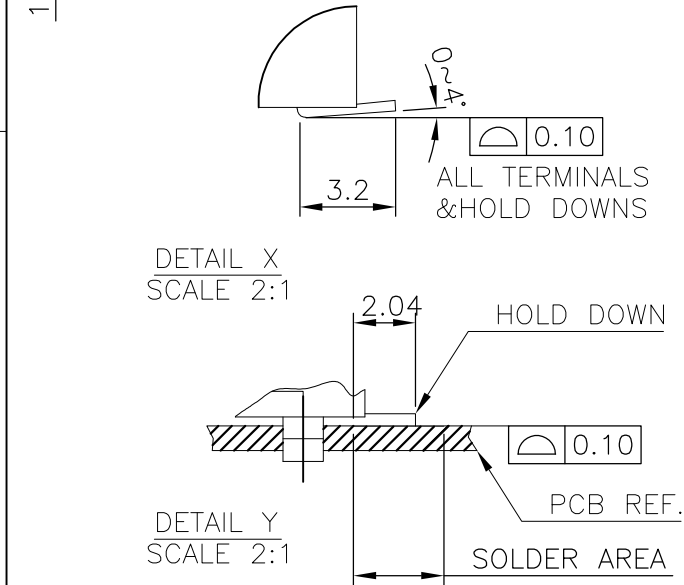

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

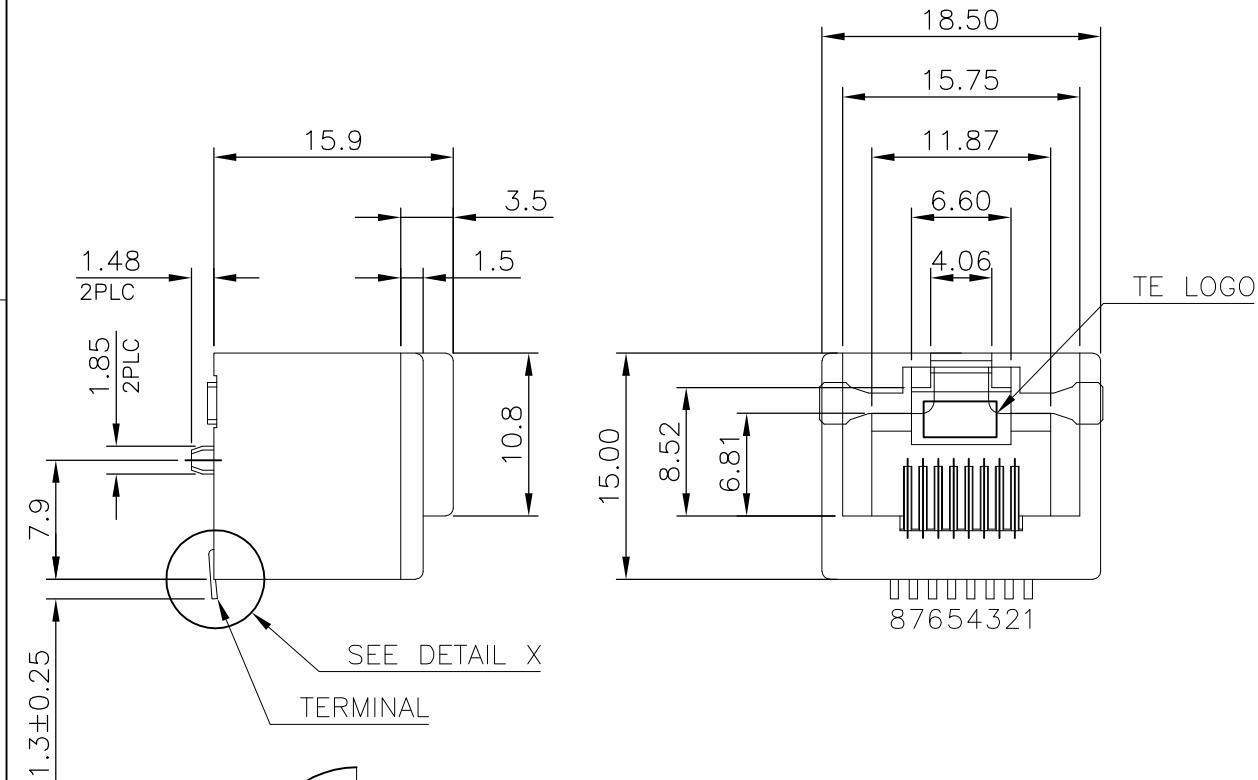

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm.
TOLERANCE: ±0.05 (TOP VIEW)

- NOTE:
- MATERIAL:
 - HOUSING: PA9T, WITH 30% GF, UL94 V-0, BLACK COLOR.
 - INSERT HOUSING: PA9T, WITH 30% GF, UL94 V-0, BLACK COLOR.
 - PICK CAP: PA46, WITH 30% GF, UL94 V-0, BLACK COLOR.
 - CONTACTS: PHOSPHOR BRONZE.
 - HOLD DOWN: BRASS.
 - FINISH:
 - CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, 1.27um [50u"] MIN. NICKEL UNDERPLATED OVERALL.
 - HOLD DOWN: 2.54um [100u"] MIN. MATTE TIN PLATED.
 - REFLOW SOLDER CAPABLE TO 260°C PER TEC-109-201, CONDITION B.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	8P8C	WITH	1.27µm [50µ"]	2-1734858-8
			0.76µm [30µ"]	2-1734858-7
			0.38µm [15µ"]	2-1734858-6
			0.15µm [6µ"]	2-1734858-5
	8P8C	WITHOUT	1.27µm [50µ"]	2-1734858-4
			0.76µm [30µ"]	2-1334858-3
			0.38µm [15µ"]	2-1734858-2
			0.15µm [6µ"]	2-1734858-1
	RJ45	PICK CAP	MIN.GOLD THICKNESS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O. HU 06NOV2007	TE Connectivity		
		CHK S. HOU 06NOV2007			
		APVD W. KODAMA 06NOV2007	NAME		
DIMENSIONS: mm		PRODUCT SPEC 108-57464	MODULAR JACK RJ45/RJ11 TOP ENTRY, SMT TYPE		
		APPLICATION SPEC			
		WEIGHT 3.3	SIZE A3	CAGE CODE 00779	DRAWING NO C-1734858
MATERIAL SEE NOTE		FINISH SEE NOTE	RESTRICTED TO -		
		CUSTOMER DRAWING		SCALE 1:1	SHEET 2 of 3
				REV B	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

© COPYRIGHT — TE Connectivity

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

NOTE:

1. PACKAGING MATERIAL:

1.1 COVER TAPE: COMPOSITE OF POLYETHYLENE
TEREPHTHALATE (PET)

1.2 CARRIER: POLYSTYRENE (PS)

1.3 CARRIER REEL: CORRUGATED FIBER

1.4 BAG: PE

1.5 BOX: CORRUGATED FIBER.


2. EACH BAG SHALL BE INCLUDED:

*DESICCANT

3. PEELING STRENGTH: 0.1~1.3N(1~130 GRAMS)
FOR 12~56mm WIDE CARRIER TAPES

4. PEELING SPEED: 300mm/MINUTES.

DESICCATING AGENTS

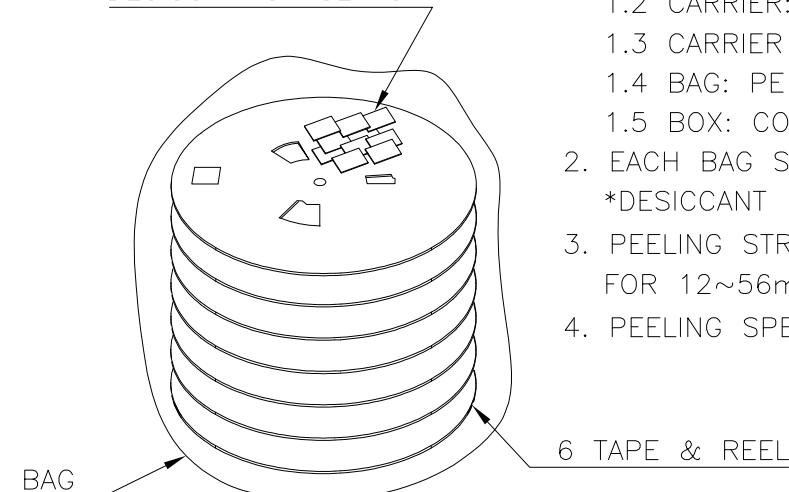



VOID FILLER

BOX

8.8KG	5.57KG	150	6	900	2-1734858-5~8
8.3KG	5.02KG				2-1734858-1~4
8.1KG	4.91KG				1-1734858-5~8
7.7KG	4.49KG				1-1734858-1~4
7.1KG	3.88KG				1734858-X
GROSS WEIGHT	NET WEIGHT	PCS/ REEL	REEL/ BOX	PCS/ BOX	PART NUMBER

* COVER TAPE PEELING FORCE:

165°~180°	A
0.1N~1.3N	F

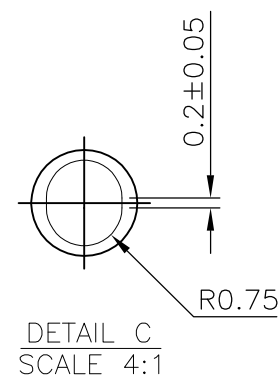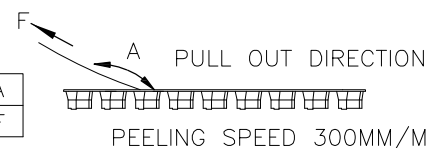DETAIL C
SCALE 4:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± — 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± — ANGLES ± — FINISH
MATERIAL SEE NOTE	SEE NOTE

DWN O. HU	06NOV2007
CHK S. HOU	06NOV2007
APVD W. KODAMA	06NOV2007
PRODUCT SPEC 108-57464	
APPLICATION SPEC —	
WEIGHT 3.3	

CUSTOMER DRAWING

STE TE ConnectivityMODULAR JACK RJ45/RJ11
TOP ENTRY, SMT TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1734858	—

SCALE 1:1 SHEET 3 OF 3 REV B