

# CA-16P1N1280DNS - Cable connector



1619588

<https://www.phoenixcontact.com/us/products/1619588>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: CA, straight, shielded: yes, SPEEDCON, No. of pos.: 16, Direction of rotation: Standard, contact connection type: Pin, Solder connection, cable diameter range: 3 mm ... 14.5 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1243679

## Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Reduced connection time with SPEEDCON fast locking system
- Solder connection: proven connection technology for various litz wires

## Commercial data

Item number	1619588
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB33
Product key	ABRAEB
GTIN	4046356822862
Weight per piece (including packing)	99.8 g
Weight per piece (excluding packing)	99.8 g
Customs tariff number	85366990
Country of origin	DE

# CA-16P1N1280DNS - Cable connector



1619588

<https://www.phoenixcontact.com/us/products/1619588>

## Technical data

### Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

### Connector

#### Insulating body

Coding	N
Insulation body material	PBT
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	100
Connection method	Solder connection
Contact switching type	Pin
Application	Signal
Number of positions	16
Direction of rotation	Standard
Connection profile	16
Rated voltage	48 V AC 74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Contact diameter <b>Signal contacts</b>	1 mm
Litz wire cross-section <b>Signal contacts max.</b>	1 mm <sup>2</sup>
Nominal current per signal contact	8 A

#### Housing

Housing material	CuZn, GD-Zn
Type of locking	SPEEDCON
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

#### Seal

External cable diameter	3 mm ... 14.5 mm
Seal material	NBR

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------


# CA-16P1N1280DNS - Cable connector

1619588

<https://www.phoenixcontact.com/us/products/1619588>

## Drawings

Dimensional drawing

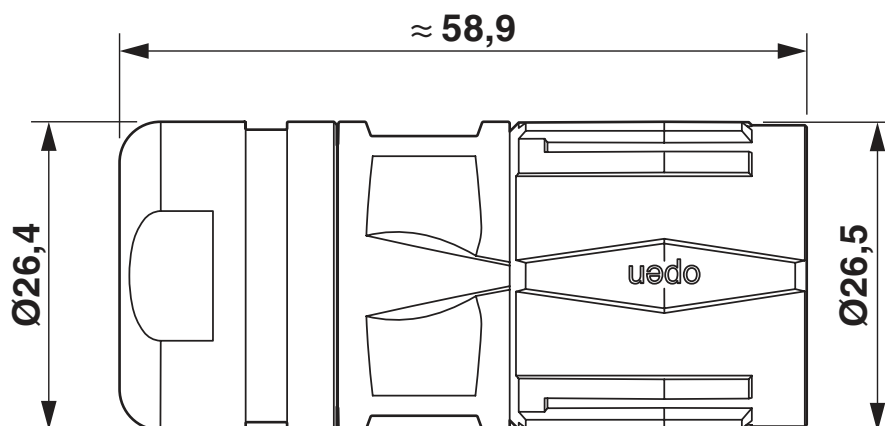


# CA-16P1N1280DNS - Cable connector



1619588

<https://www.phoenixcontact.com/us/products/1619588>

Schematic diagram

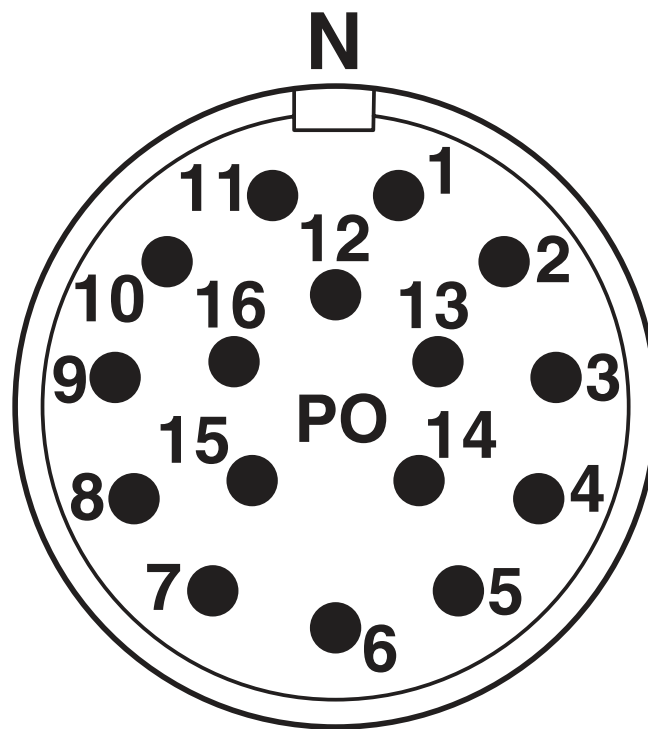

# CA-16P1N1280DNS - Cable connector





1619588

<https://www.phoenixcontact.com/us/products/1619588>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1619588>

 <b>cUL Recognized</b> Approval ID: E335019-20141210				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	48 V	5 A	- 18	-

 <b>UL Recognized</b> Approval ID: E335019-20141210				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	48 V	8 A	- 18	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# CA-16P1N1280DNS - Cable connector



1619588

<https://www.phoenixcontact.com/us/products/1619588>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 8.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# CA-16P1N1280DNS - Cable connector



1619588

<https://www.phoenixcontact.com/us/products/1619588>

## Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

# CA-16P1N1280DNS - Cable connector

1619588

<https://www.phoenixcontact.com/us/products/1619588>



## Accessories

### SF-Z0028 - Torque screwdriver

1607456

<https://www.phoenixcontact.com/us/products/1607456>

Torque screwdriver, series: RC



---

### SF-Z0027 - Hook wrench

1607455

<https://www.phoenixcontact.com/us/products/1607455>

Hook wrench, series: RC





# CA-16P1N1280DNS - Cable connector

1619588

<https://www.phoenixcontact.com/us/products/1619588>



## RF-Z0003 - Square mounting flange

1607905

<https://www.phoenixcontact.com/us/products/1607905>



Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1242369

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)