

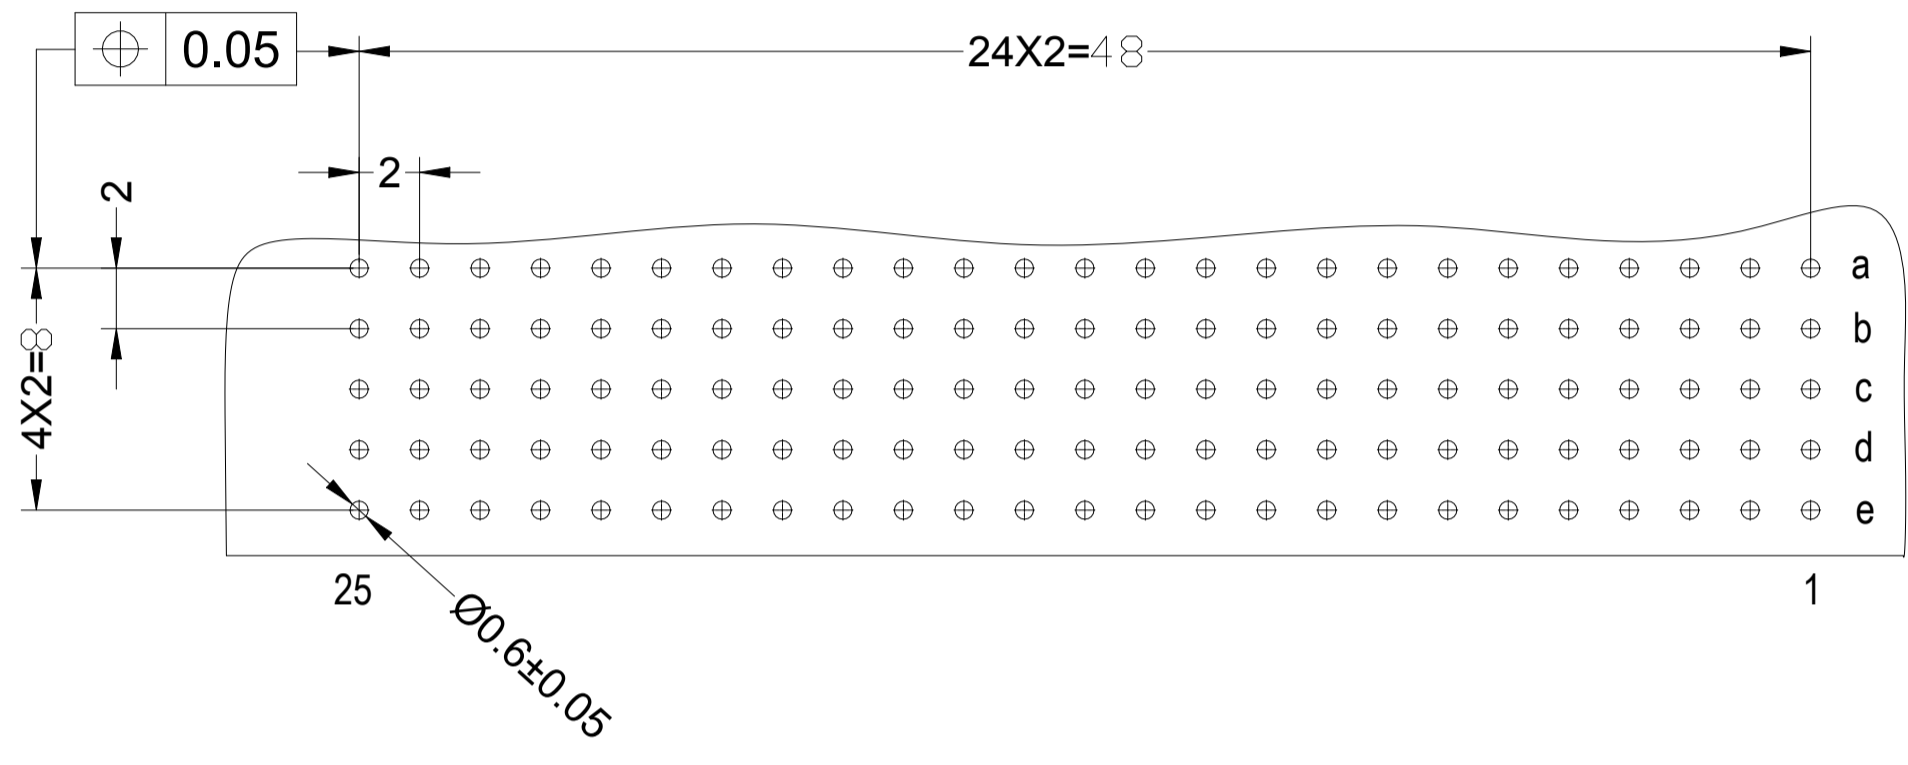
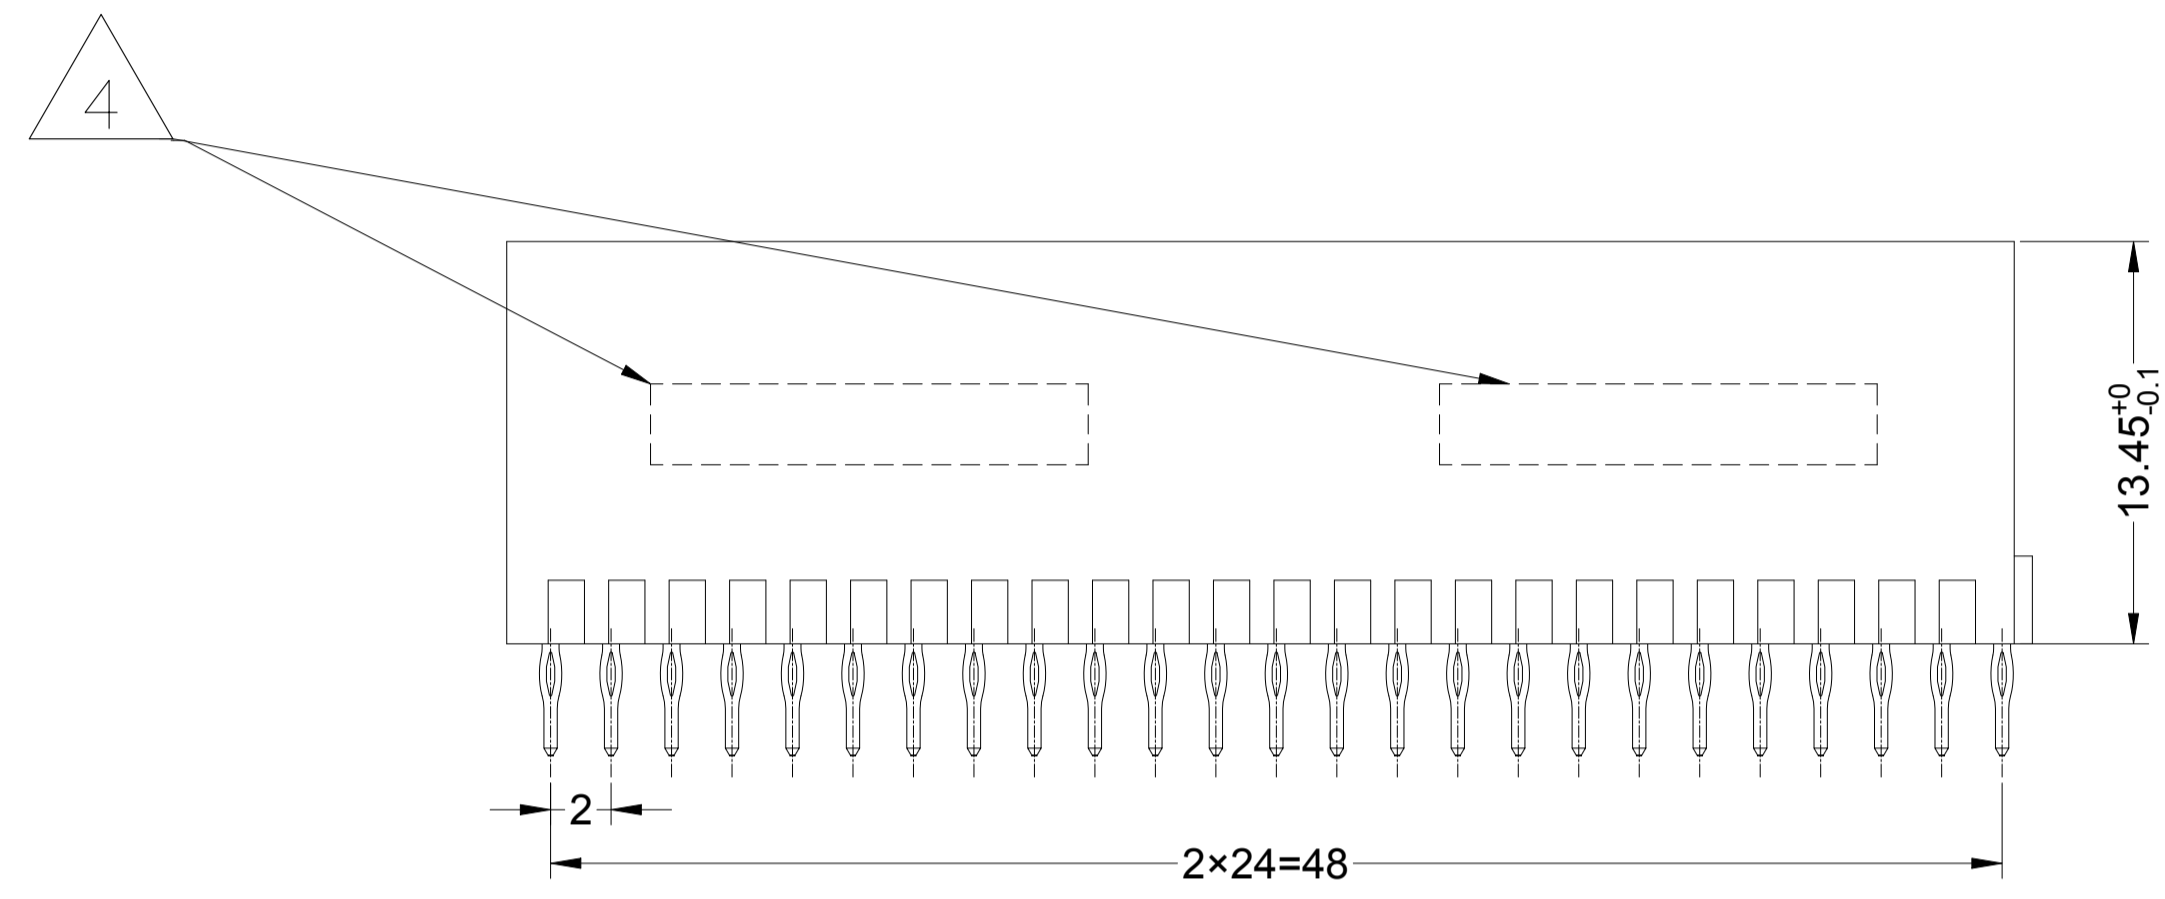
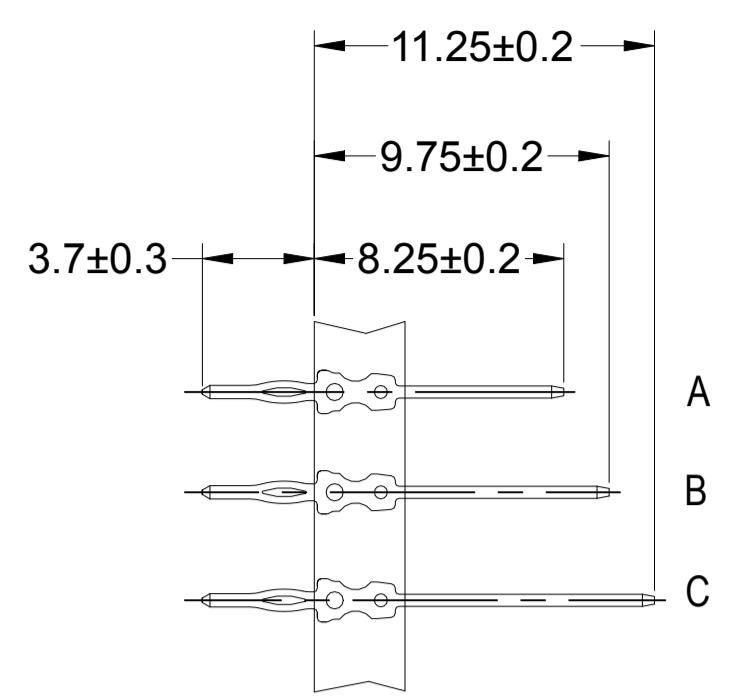
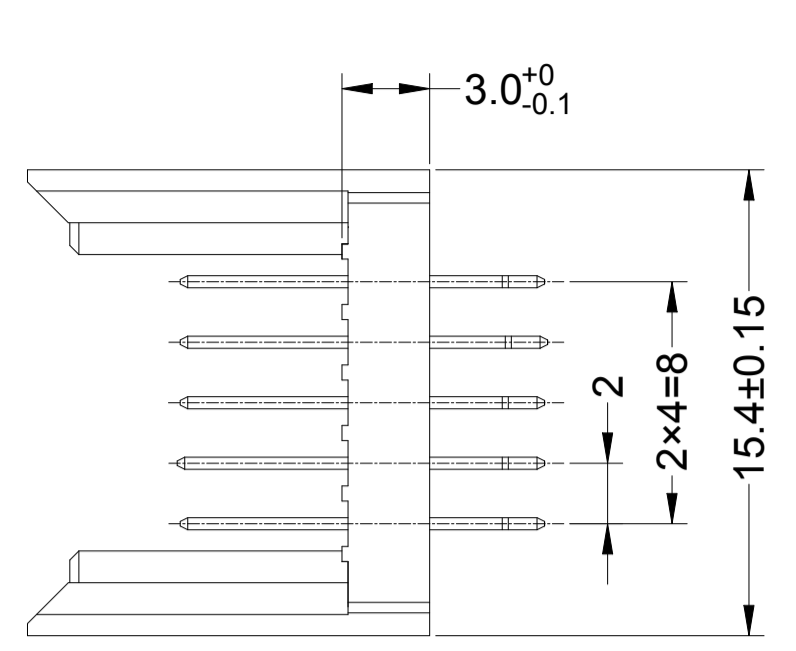


REVISIONS				
P	LTR	DESCRIPTION	DATE	APP'D
A		INITIAL DRAWING	18OCT2021	TL HL

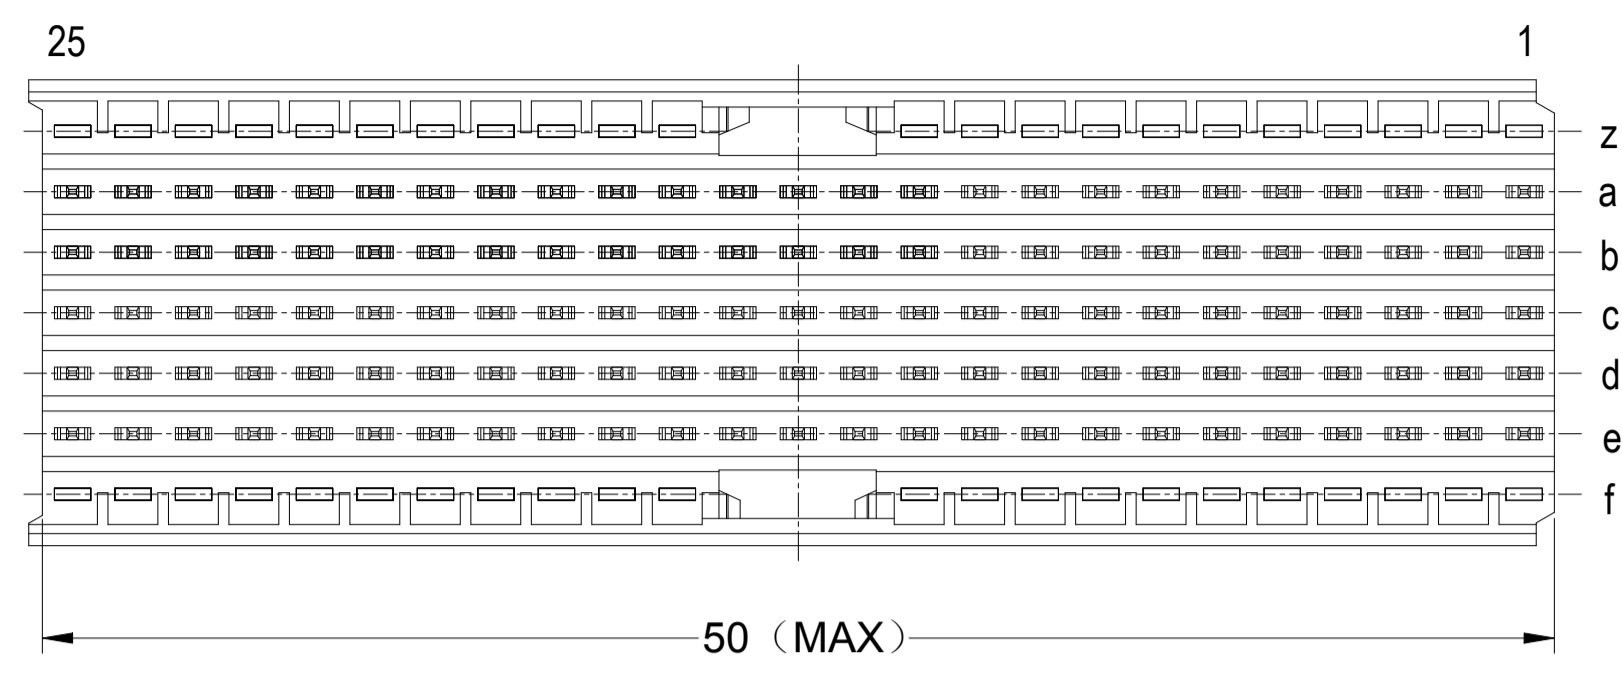

RECOMMEND PCB-HOLE LAYOUT
 COMPONENT SIDE SHOWN
 TOLERANCE ±0.05

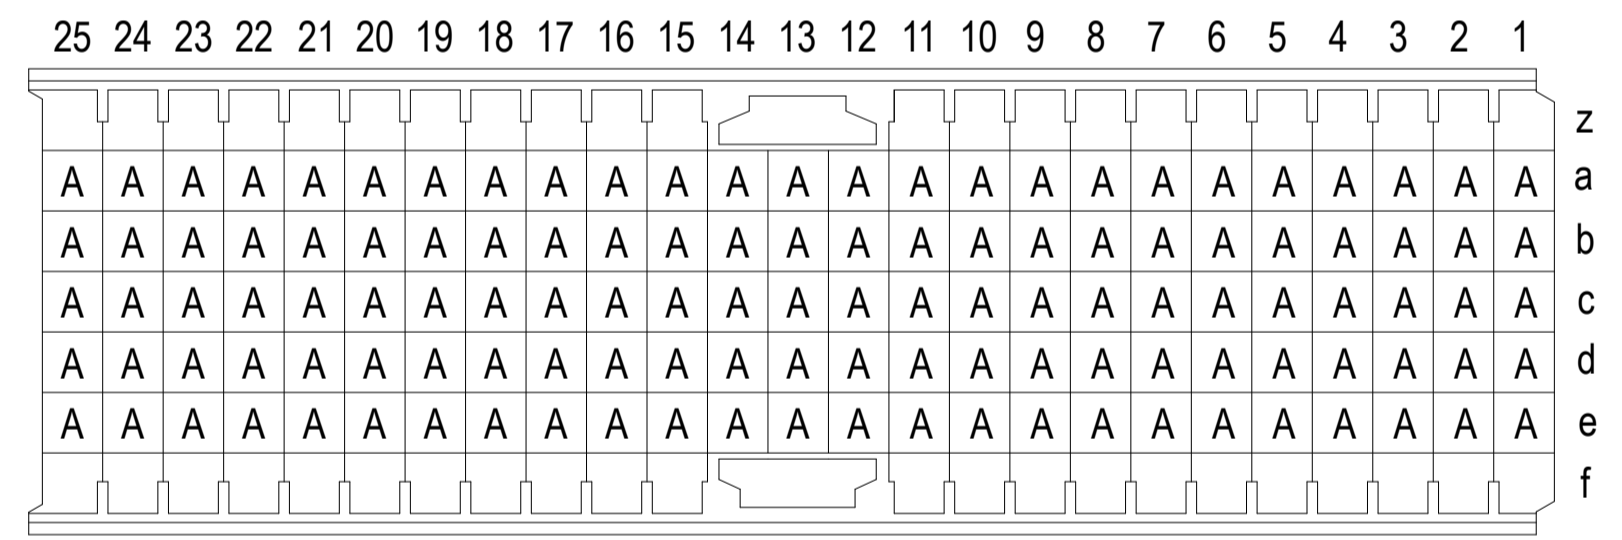

- 1 MATERIAL:
 CONTACT: COPPER ALLOY.
 HOUSING: GLASS-FILLED POLYESTER.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING
 (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
 PIN: 0.5µm MIN TIN.
 FOR PLATING OF MATING SURFACES SEE APPLICABLE
 SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
 PERFORMANCE LEVEL 2.
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.

2/3	2392181-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN TONY LI 27MAY2021		NAME MALE ASSEMBLY, Z-PACK 2mm HM, 125P TYPE A/B EON	
DIMENSIONS: mm		CHK ALEX XU 27MAY2021		APPROVED HOPE LU 27MAY2021	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		0-PLC ±		SIZE A1	
1-PLC ±0.2		2-PLC ±		CAGE CODE 00779	
3-PLC ±		4-PLC ±		DRAWING NO. C=2392181	
ANGLES ±		APPLICATION SPEC 108-19082		RESTRICTED TO	
MATERIAL 1		WEIGHT 0		SCALE 4:1	
FINISH SEE TABLE		CUSTOMER DRAWING		SHEET 1 of 1	