



# PIR Occupancy Sensor

**NWO-OFX**

## Compatible with Power Packs:

- BTX-DUV-CCTFX
- BTX-DUV-10VFX


## Dimensions in Inches

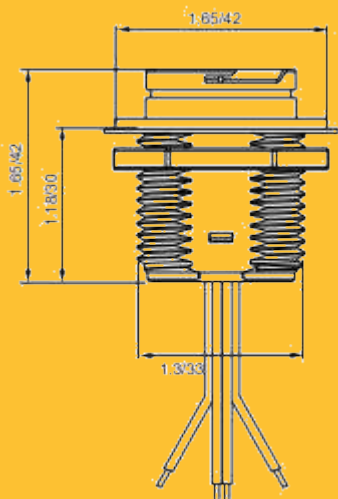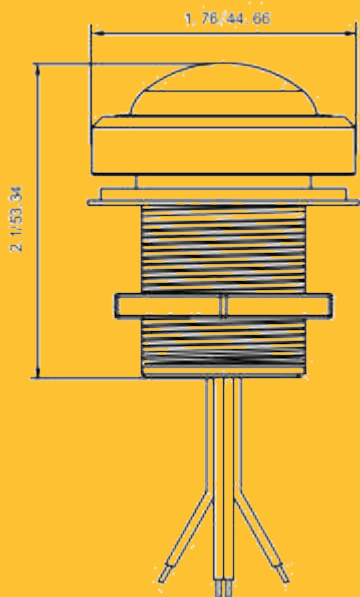

- PIR 12-32V 10mA input
- Compact size fits into most applications
- Programmable group logic



## WIRING DIAGRAM

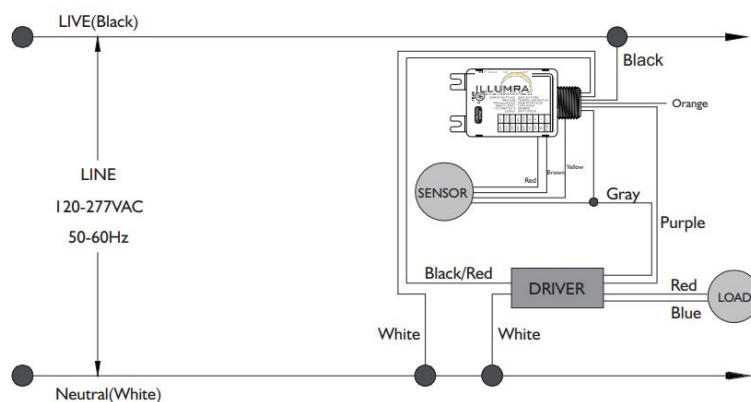

| SPECIFICATIONS             | NWO-OFX   |
|----------------------------|---|
| <b>Infrared Sensor</b>     | Omni-directional quad element pyroelectric  |
| <b>Detectable Speed</b>    | 1~10 Ft/Sec (0.3~3m/sec)  |
| <b>Detection Range</b>     | 40 Ft   |
| <b>Delay Time Settings</b> | First delay time setting 1-59 minutes<br>Second delay time setting 0-59 minutes<br>First delay dimming level 0-100% |
| <b>Optimal Temperature</b> | -40°F~158°F (-40°C~70°C)  |
| <b>Dimensions</b>          | Diameter 1.76" x 2.1" length  |