
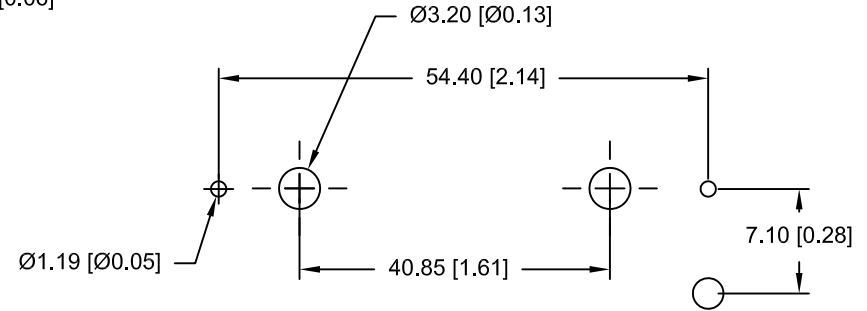
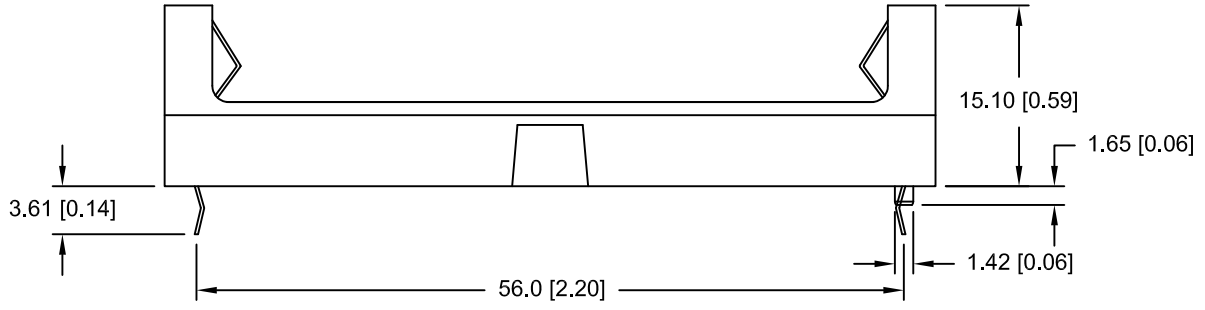
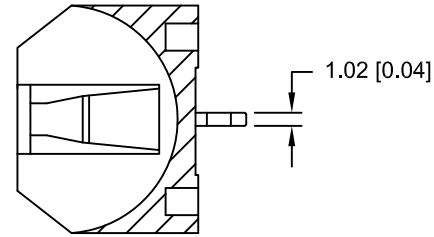


| Date     | SYM | REVISION RECORD             | AUTH | DR.  | CK. |
|----------|-----|-----------------------------|------|------|-----|
| 10/17/14 | C   | Updated to ROHS 2 compliant | T.B. | B.S. |     |
| 04/21/17 | D   | Dim. 56.0 was 54.40         | T.B. | B.S. |     |
|          |     |                             |      |      |     |

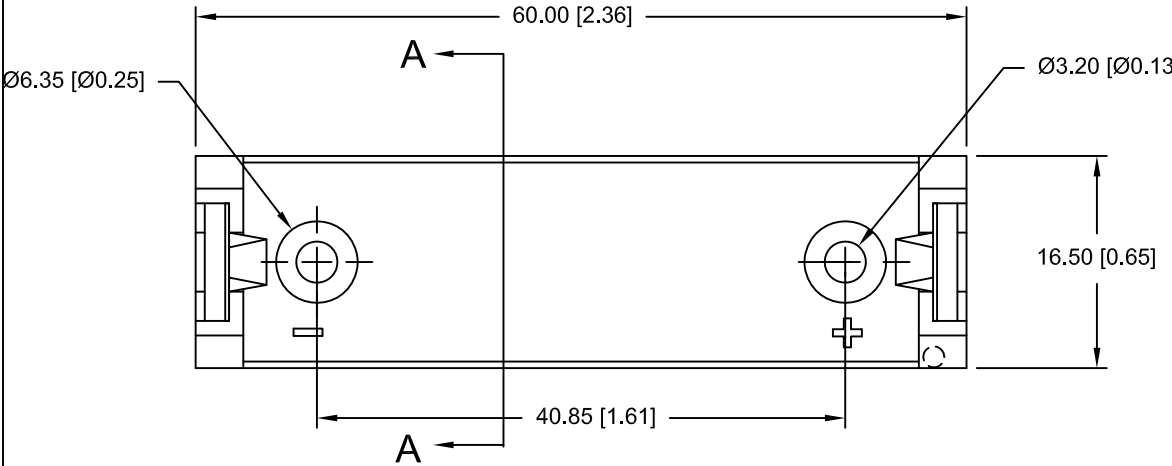

PC BOARD LAYOUT

**NOTES:**  
 Material: Self-extinguishing Thermoplastic Polyester, color black  
 Temperature Range: -40°C to +180°C  
 Contacts: 302 Stainless Steel Spring Temper, Nickel Plated  
 Flammability Rating: UL 94V-0  
 Dielectric Strength: 560 Volts/Mil. at 25°C for 5 Sec.  
 Resistance to Solvents: Xylene, ethyl, butyl, methyl & toluene  
 ROHS 2 COMPLIANT

|                                |   |                                |                                   |
|--------------------------------|---|--------------------------------|-----------------------------------|
| Tolerance<br>(Except as noted) | <b>Memory Protection Devices, Inc</b><br>200 Broad Hollow Road, Farmingdale, New York 11735 |                                |                                   |
| decimal<br>±.5 (.02)           |   | Scale<br>2=1                   | Drawn By T.S.<br>Approved By T.B. |
| Fractional<br>± .8 (.03)       | Title<br><b>AA BATTERY HOLDER</b>   |                                |                                   |
| Angular<br>± 3°                | Date<br>04/21/17  | Drawing Number<br><b>6S-AA</b> |                                   |