




# Field Interface Modules



**Passive - 3 wire**  
**16 Channel**  
**Output**  
**GMT Fuse\*\* and Circuit Breaker**  
**Allen-Bradley**

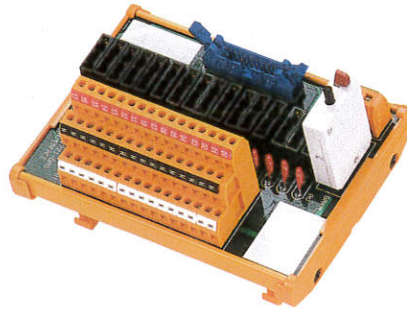

**Passive - 2 wire**  
**16 Channel**  
**Output Fused\* w/LED**  
**Allen-Bradley**

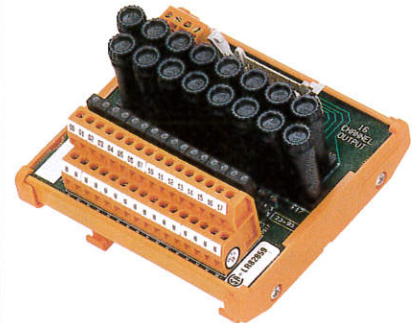

## Technical Data

Type	RS RI OAD 16 BKR	RS RI 16 FL 120 W/LD
Part number	915289 1771-OAD	990877 120 VAC 1771-OAD 990876 10-60 VDC 1771-OB 919774 24 VDC 1746-OB16 919772 24 VDC 1746-OV16
Rated voltage	120 VAC	See Above
Rated current	2.0 A per channel / 12.0 A per module	3.0 A per channel / 6.0 A per module
Cable connection	(1) 1 x 20 pin IDC	(1) 1 x 20 pin IDC
LED Indicators	No	Yes
Operating Temperature	0°C...+50°C	0°C...+50°C
Storage Temperature	-20°C...+60°C	-20°C...+60°C
Dimensions LxWxH mm	146 x 109 x 89	117 x 109 x 76
Terminal Wire Size	#26...14 AWG	#26...14 AWG
Terminal Type	Screw Clamp	Screw Clamp
Approvals		

## Wiring Schematics

