
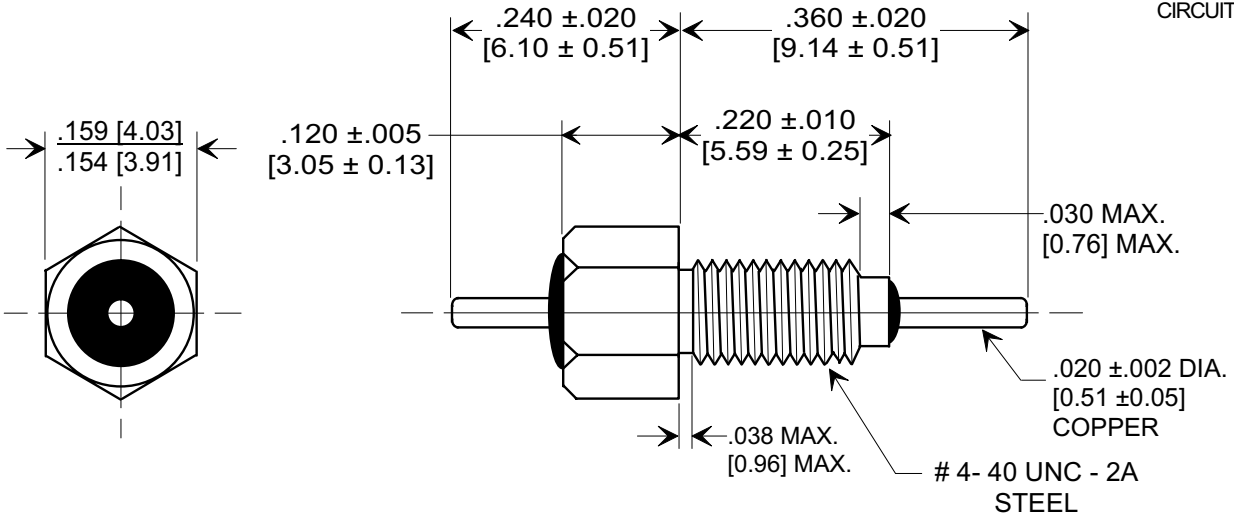



# MARKETING SALES DRAWING


**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

**Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.**



### MOUNTING HARDWARE

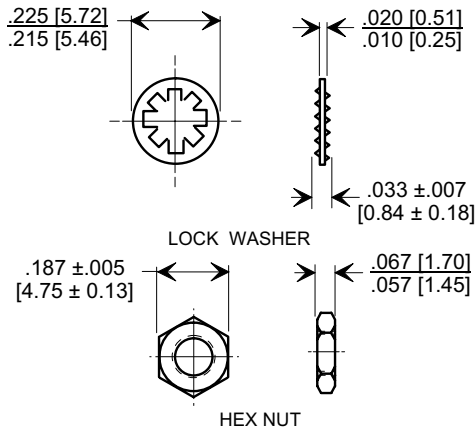

### NOTES:

1. TUSONIX STANDARD PART NUMBER: 4400-010.  
TUSONIX RoHS COMPLIANT PART NUMBER: 4400-010 LF.  
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. LEAD, BUSHING, AND MOUNTING HARDWARE: SILVER PLATED.
3. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
4. OPERATING TEMPERATURE RANGE : -55°C TO +125°C.
5. MAX. RECOMMENDED SOLDERING TEMPERATURE: 260°C.
6. SUPPLIED WITH HEX NUT AND INTERNAL TOOTH LOCK WASHER.
7. MAX. RECOMMENDED MOUNTING TORQUE - 2.0 lb.-in. [.226 Nm].

CAP.(pf)	TOLERANCE	DC WORKING VOLTAGE		I.R. MIN. @ 100 (VDC.)	DWV (VDC)	DC CURRENT (AMPS)	MIN. NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220				
		85°C	125°C				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
27,000	GMV	70	50	10 G Ω	150	10	10	28	42	65	65

X-2015 Rev-0 REVISION RECORD Original Release C.O.	0	<b>--TOLERANCES--</b> Unless Otherwise Specified  <b>DECIMAL ± NOTED</b>  <b>ANGLES ±</b>	Title <b>BUSHING STYLE EMI FILTER</b>	
			Drawn S.M. 03-05-08 Scale 5 X	
			Approved M.M. 03-05-08	
	<b>TUSONIX</b> TUCSON, ARIZONA		<b>A</b>	<b>4400-010</b>

X-2015 Rev-0