



Einsatzbereich: - 940

TE Teile Nr.: 61-0108-011-000
IC Ref. Nr.: 61.108.11

Elektrische Werte

Bemessungsstrom max. 25 A*
Durchgangswiderstand < 3 mOhm

Werkstoff

Kontakt Messing, vergoldet
Dichtung FKM

Anschluss

Anschlussart/-bereich Crimp/ 0,35 - 2,5 mm²
- für Isolationscrimp max. ø4,3 mm
Abisolierlänge 7 mm
Crimpeinstellungen sind individuell zu wählen

Mechanische Werte

Steckzyklen 500

Werkzeuge (nicht im Lieferumfang enthalten)


digitale Crimpzange TE Teile Nr.: C0-0236-000-000
IC Ref. Nr.: C0.236.00

analoge Crimpzange TE Teile Nr.: C0-0201-000-000
IC Ref. Nr.: C0.201.00

(Positioniereinsatz für 2 mm Kontakte TE Teile Nr.: C0-0004-000-000
IC Ref. Nr.: C0.004.00)

Crimmmaschine TE Teile Nr.: WA-1672-000-000
IC Ref. Nr.: WA10672

Digitaler Crimpeinsatz, mittel TE Teile Nr.: C0-0373-000-000
IC Ref. Nr.: C0.373.00

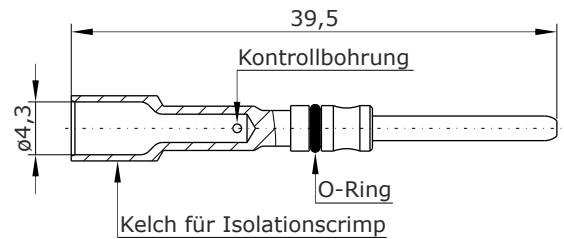

Hauptabmessungen

Kontaktstift





for: - 940

TE part number: 61-0108-011-000
IC reference number : 61.108.11

Electrical Data

rated current max. 25 A*
contact resistance < 3 mOhm

Material

contacts brass, gold plated
seal FKM

Termination


cross-section crimp/ 0.35 - 2.5 mm²
- for insulation crimp max. \varnothing 4.3 mm
stripping length 7 mm
crimp settings select individually

Mechanical Data

mating cycles 500

Tools (not part of product contents)

digital crimping tool	TE part no.: C0-0236-000-000 IC ref. no.: C0.236.00
analog crimping tool	TE part no.: C0-0201-000-000 IC ref. no.: C0.201.00
(positioner for 2 mm contacts)	TE part no.: C0-0004-000-000 IC ref. no.: C0.004.00)
crimping machine	TE part no.: WA-1672-000-000 IC ref. no.: WA10672
digital crimp insert, medium	TE part no.: C0-0373-000-000 IC ref. no.: C0.373.00

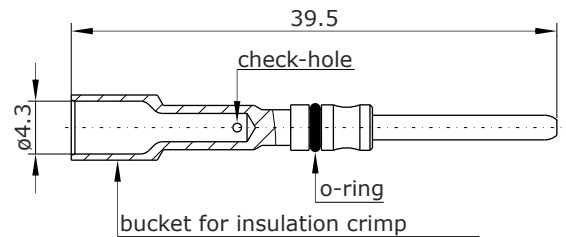

Main Dimensions

contact pin

