

## **RF/Microwave Absorber Kit**

Be sure to review our complete line of microwave absorbers for free space and cavity resonance applications.

SAMPLE MATERIAL	FUNCTION	OPERATING FREQUENCY		BENEFITS	COMMON
		FREQUENCT	NUMBER		APPLICATIONS
<b>Eccosorb</b> <sup>®</sup>	Mode Absorber	> 6 GHz	0.010" - 21124201	Ultra-thin, broadband, high	RF/microwave and
MFS-124/SS6M	Magnetic Elastomer		0.020" - 21164168	frequency, cavity resonance,	millimeter wave modules,
0.010" & 0.020"				Fire Retardant per UL-94 VO	converters, transceivers
Eccosorb	Mode Absorber	6-35 GHz	21226192	Thin, broadband, intermediate	RF/microwave modules,
GDS/SS6M	Magnetic Elastomer			frequency, cavity resonance	converters, transceivers,
0.030"					PAs
	Mode Absorber	800 MHz-18 GHz	21109145	This basedhead law	
Eccosorb	Magnetic Elastomer	800 MILT-18 GLT	21109145	Thin, broadband, low frequency, cavity resonance,	RF/microwave modules, converters, transceivers,
MCS/SS6M				Fire Retardant per UL-94 VO	PAs
0.040"					
Eccosorb	mm Absorber dielectric	35-100 GHz	203540226	Thin, broadband,	mm wavelengths,
MMI/SS6M	load elastomer			high frequency, outdoor	automotive, 5G network
0.020"				environment, ceramic loading	and data
Eccosorb	mm Absorber dielectric	35-100 GHz	85000167	Thin, broadband, high	mm wavelengths,
JCS9/SS6M	load elastomer			frequency, flexible, low density,	automotive, 5G network
0.020"				carbon loading	and data
	Absorber, thermal	< 4 GHz	CZ700LF-060	Soft, high attenuation,	IC coupling/heat sink
Coolzorb 700 LF	interface, elastomer	× 4 0112	C2700L1-000	thermally conductive, flexible	coupling, attenuating
0.060"				for low frequency applications	memory chips
Coolzorb 600	Absorber, thermal	> 4 GHz	A18002-040	Soft, high attenuation,	Antenna reflection, cavity
0.040"	interface, elastomer			thermally conductive, flexible	reflection, surface
0.040				for high frequency applications	reflection
RFRET	Absorber, dielectric	2-18 GHz	4000	Lightweight, flexible, optional	Antenna reflection, cavity
0.375"	loading, foam			weather sealing, gradient	reflection, surface
0.375					reflection
FlexK LoK /SS6M	Low dielectric,		28017104	Thin, flexible, low loss, low	Radome, PCB signal
-	elastomer			dielectric constant	integrity, component
0.020"					isolation, coupling
Kzorb 1.7MAG	Dielectric/absorber		29FB20080	Combination dielectric and	Useful around chip and on
	system			absorber for on board	PCB
0.100"				applications	

## CUSTOM CONFIGURATIONS ALSO AVAILABLE. CONTACT LAIRD PERFORMANCE MATERIALS FOR A QUOTE!

Capabilities: Through and kiss cut, water jet, custom samples, precision machining, mold-in-place technology, injection molding. Ask your salesperson for details.

SS3 refers to acrylic-based pressure sensitive adhesive. SS6M refers to the modified pressure sensitive adhesive used with silicone absorbers. Common thicknesses included. Consult with us for additional options.




Americas: +1 866.928.8181 Europe: +44. (0).8031.2460.0 Asia: +86.755.2714.1166

Laird Performance Materials Enables High-Performance Electronics

## **RF/Microwave Absorber Kit**



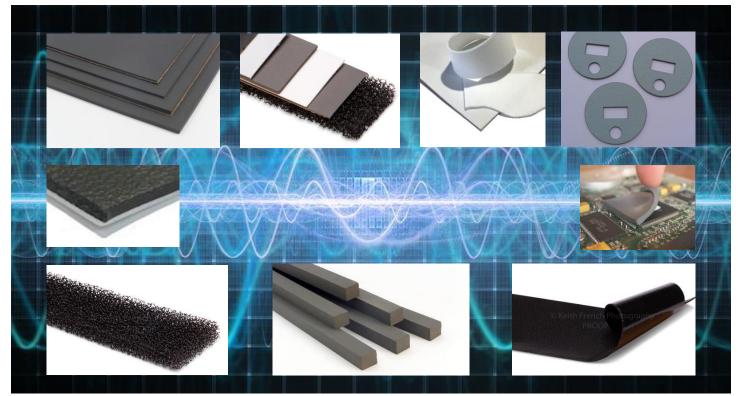

Microwave absorber and dielectric solutions for 100 MHz to 100 GHz; and beyond....

Any information furnished by Laird Technologies, Inc. and its agents are believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user. Laird Technologies makes no warranties as to the fitness, merchantability, suitability or non- infringement of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2018 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third-party intellectual property rights.



Americas: +1 866.928.8181 Europe: +44. (0).8031.2460.0 Asia: +86.755.2714.1166

Laird Performance Materials Enables High-Performance Electronics