

## Contact insert - VC-AML 5 - 1607523

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Contact insert module, for panel mounting frames, with 90° PCB connection, 4-pos. + PE, 690 V / 63 A




The illustration shows the product version VC-AML 5

### Product Features

- Compact design
- Proven COMBICON technology
- Can be keyed to prevent incorrect connection
- Direct PCB connection



### Key commercial data

Packing unit	1 PCE
GTIN	 4 017918 969172
Weight per Piece (excluding packing)	34.77 GRM
Custom tariff number	85366990
Country of origin	Poland

### Technical data

#### General

Note	Connectors may only be connected/disconnected when under no load.
Connection method	Solder connection
	Solder connection
Pollution degree	3
Surge voltage category	III
Number of positions	4+PE
Insertion/withdrawal cycles	≥ 50

# Contact insert - VC-AML 5 - 1607523

## Technical data

### General

Design	VC3
Connection in acc. with standard	IEC / EN

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 100 °C
---------------------------------	-------------------

### Material data

Inflammability class according to UL 94	V0
Contact material	CuZn
Contact surface material	hard-silver plated
Contact carrier material	PA

### Electrical characteristics

Rated voltage (III/3)	690 V
Nominal voltage $U_N$	690 V
Rated surge voltage	6 kV
	6 kV
Rated current	63 A
	70 A

## Classifications

### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440209

### ETIM

ETIM 2.0	EC000438
ETIM 3.0	EC000438
ETIM 4.0	EC000438
ETIM 5.0	EC000438

### UNSPSC

UNSPSC 6.01	30211923
-------------	----------

# Contact insert - VC-AML 5 - 1607523

## Classifications

### UNSPSC

UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

## Approvals

### Approvals


Approvals


UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized


Ex Approvals

Approvals submitted

### Approval details


UL Recognized 	
Nominal current IN	55 A
Nominal voltage UN	600 V

cUL Recognized 	
Nominal current IN	45 A
Nominal voltage UN	600 V

GOST 	
--	--

# Contact insert - VC-AML 5 - 1607523

## Approvals



## Accessories

Accessories

Coding element


Coding profile - CP-HCC 4 - 1600027




Coding profile, Number of positions: 1, Color: red

## Drawings

Diagram

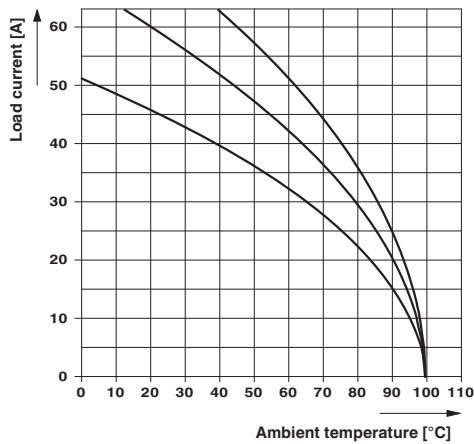

Dimensioned drawing



## Contact insert - VC-AML 5 - 1607523

Dimensioned drawing

