

CHAMP | CHAMP .8 mm Connector

TE Internal #: 5796055-2 PCB D-Sub Connectors, Receptacle, Cable-to-Board, 68 Position, .8 mm [.031 in] Centerline, 4 Row, High Profile, Right Angle, CHAMP . 8 mm Connector

View on TE.com >

Connectors > D-Shaped Connectors > D-Sub Connectors > PCB D-Sub Connectors



Connector & Housing Type: Receptacle Connector System: Cable-to-Board Number of Positions: 68

Centerline (Pitch): .8 mm [.031 in]

Number of Rows: 4

Features

TE

Product Type Features

Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Signal Positions	68
Number of Positions	68
Number of Rows	4
PCB Mount Orientation	Right Angle
Body Features	
Insert Material	Thermoplastic
Shell Plating Material	Nickel over Copper
Primary Product Color	Black
Connector Profile	High
Contact Features	

PCB D-Sub Connectors, Receptacle, Cable-to-Board, 68 Position, .8 mm [.031 in] Centerline, 4 Row, High Profile, Right Angle, CHAMP .8 mm Connector



Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Mating Area Plating Material	Gold
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	1.5 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.25 mm[.01 in]
Rectangular Termination Post & Tail Width	.3 mm[.011 in]
Termination Post & Tail Length	3.55 mm[.14 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mounting Hole Diameter	1.2 mm
PCB Mount Alignment	Without
PCB Mount Retention	With
PCB Mount Retention Type	Boardlock
Mating Retention	With
Mating Retention Type	Screwlocks
Connector Mounting Type	Board Mount
Housing Features	
Shell Material	Carbon Steel
Housing Material	Thermoplastic
Centerline (Pitch)	.8 mm[.031 in]
Dimensions	
PCB Thickness (Recommended)	2.35 mm
Row-to-Row Spacing	1.15 mm[.045 in]
Jsage Conditions	
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Shielded	Yes
Circuit Application	Signal
ndustry Standards	
UL Flammability Rating	UL 94V-0
	00/00/00000

C For support call+1 800 522 6752

PCB D-Sub Connectors, Receptacle, Cable-to-Board, 68 Position, .8 mm [.031 in] Centerline, 4 Row, High Profile, Right Angle, CHAMP .8 mm Connector



Packaging Features Packaging Quantity 32 Packaging Method Box Other D-Shaped Connectors Comment Row 1 - kinked legs **Product Compliance** For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU Compliant Compliant EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016 No Restricted Materials Above Threshold EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC Halogen Content Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free

Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

PCB D-Sub Connectors, Receptacle, Cable-to-Board, 68 Position, .8 mm [.031 in] Centerline, 4 Row, High Profile, Right Angle, CHAMP .8 mm Connector






Also in the Series CHAMP .8 mm Connector

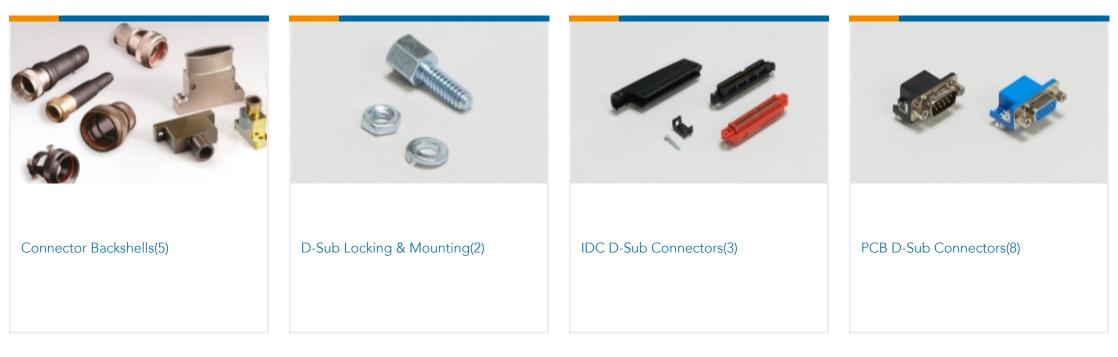

Customers Also Bought

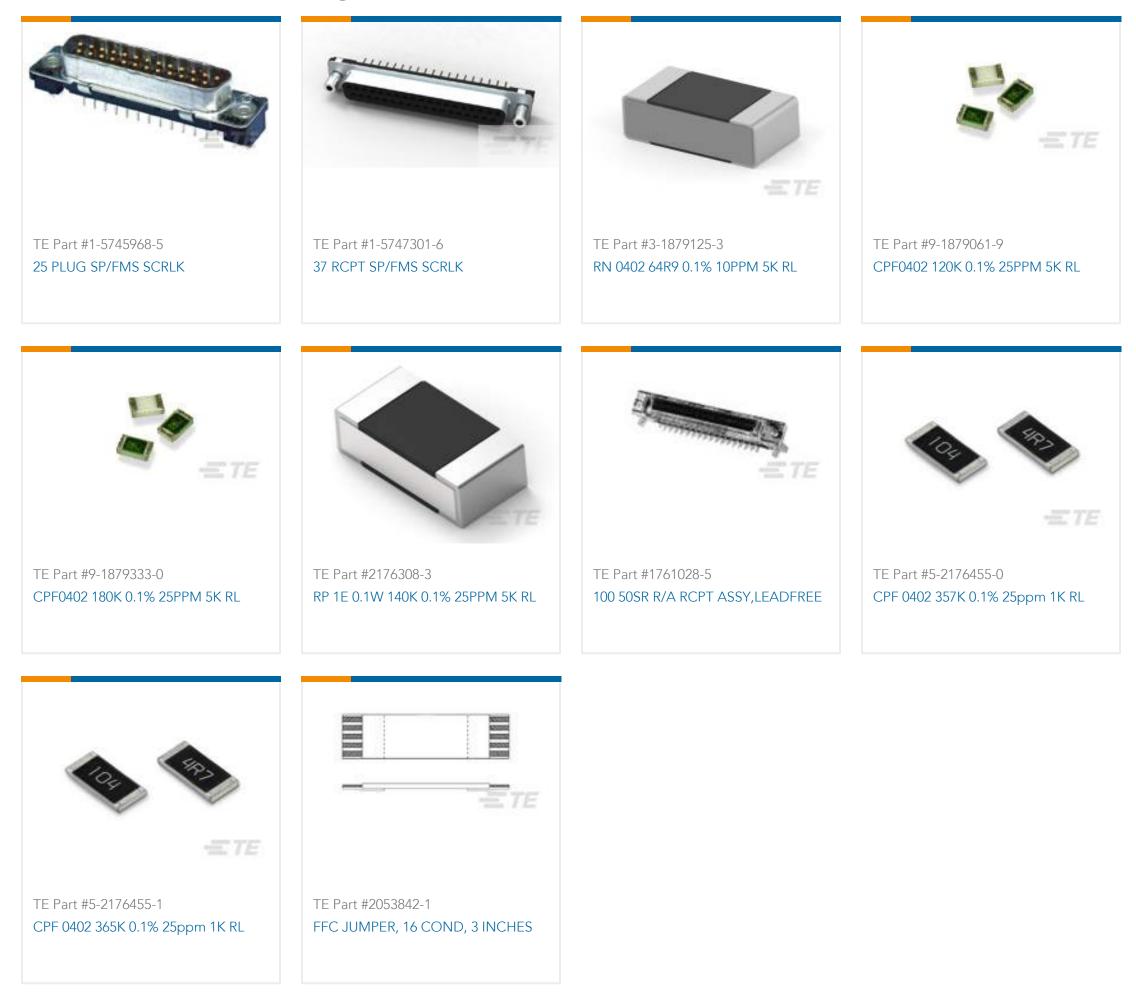

PCB D-Sub Connectors, Receptacle, Cable-to-Board, 68 Position, .8 mm [.031 in] Centerline, 4 Row, High Profile, Right Angle, CHAMP .8 mm Connector



Documents

Product Drawings 68 CHAMP R/A ASSY, LC

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5796055-2_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5796055-2_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5796055-2_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)

English

Mass Termination Tooling Assembly 543580-1 & Cutter Subassembly 543610

English