

1

2

3

4


5

6

7

2000±50


A

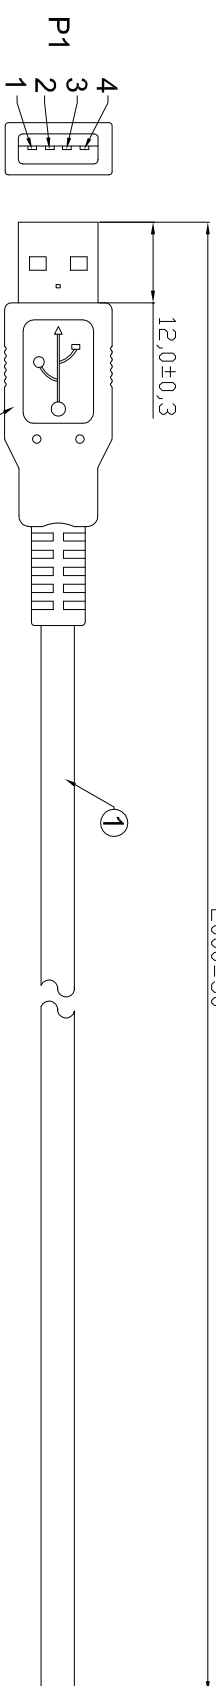

① Cable Black print
 AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
 ---C AWM I/III A 80°C 30V FT1 USB 1.1 CABLE



OPEN

B

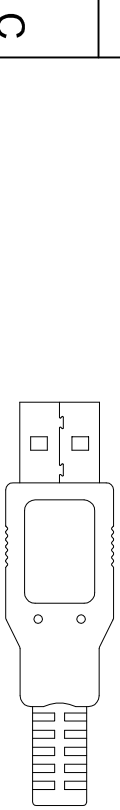

C

D

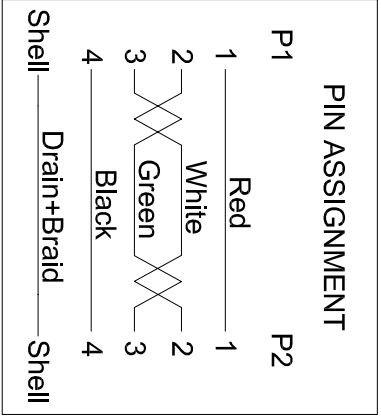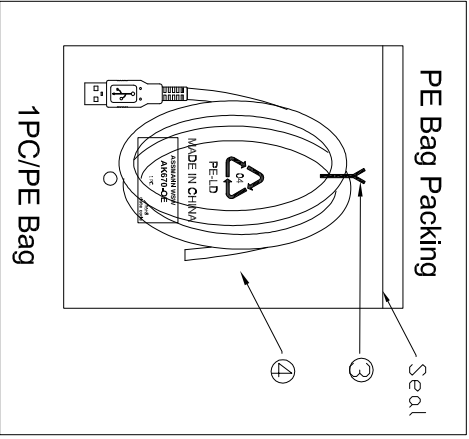

Electrical test:
 1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 5MΩ min.
 4. Dielectric test: DC 300V

E

⑤	PE Bag	1	Clear Print black "MADE IN CHINA"+ "1PC"
④	TIE	1	White
③	Out Jacket	NA	Beige(BG002) PVC-45P
②	CONN	1	USB A Male Shell:Nickel Pin:G/F Insulator color:White
①	Cable	1	USB1.1 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Beige(BG002)

F

NO.	NAME:	QTY	SPECIFICATION	
			Customer-No.	
			ASSMANN WSW-No.	AK670-OE

ROHS compliant
 Unit: mm

G

Scale	Free								
TOLERANCE									
DIM	TOL	①	Update the drawing	09.05.2016	Amy				
		①	Drawn	24.10.2014	Amy	Approved	09.05.2016	Amy	

H

Angle	TOL	Id.	Modification	Date	Name				

1

2

3

4

5

6

7



Drawing-No.
ASS 7244 CA
 rev01

Replace Sheet

H

G

E

D

C

B

A