

# MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.  
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

## SWITCH - BASIC

CATALOG LISTING

V3-1113

CK-MI350

5

V3-1113

M

DRAWING NUMBER

X 2

ISSUE

4

REPLACES X61345-V3

RELEASE NO. PR-4024

CHECK

REVISIONS

A	C039182	CEB	10 FEB 78
B	C074635	KDR	10 MAY 93
C	C077796	DCS	24 MAR 94

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

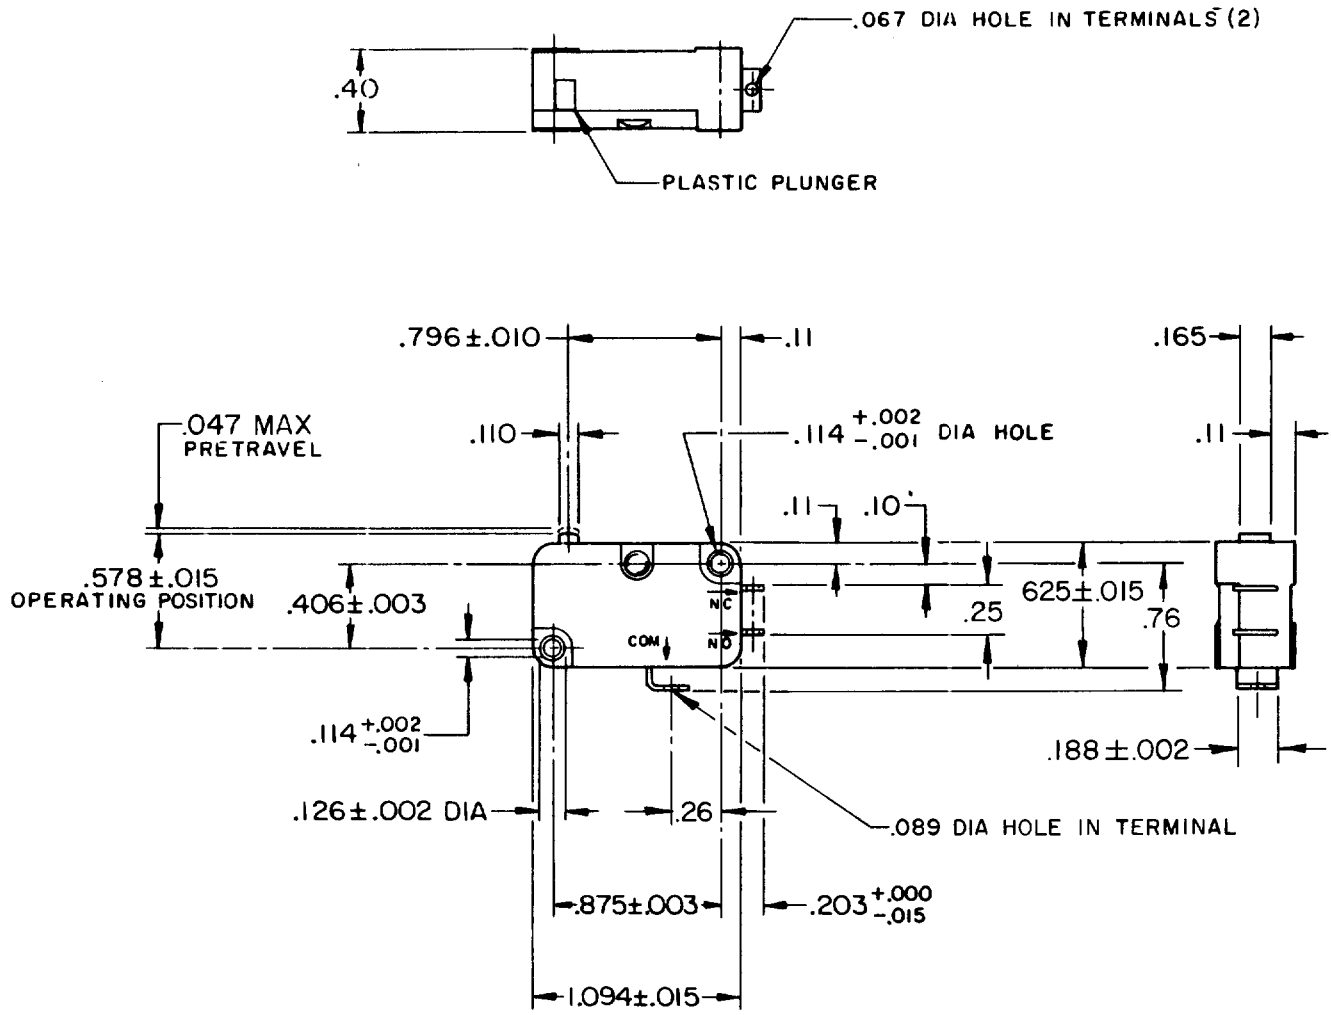

NOTE -  
1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 75 GRAMS MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE TRAVEL - - - - - .010 MIN	L112 10A 1/3HP 125 OR 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"	UNLESS OTHERWISE NOTED
RELEASE FORCE - - - - - 10 GRAMS MIN		DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL - - - - .002-.010		<b>TOLERANCES ARE</b>
OVERTRAVEL - - - - - .050 MIN		ONE PLACE (.01) $\pm .030$
FREE POSITION - - - - - .625 MAX		TWO PLACE (.00) $\pm .015$
		THREE PLACE (.000) $\pm .005$
		ANGLES $\pm$
		WEIGHT

FO-52848  
DRAWN  
D B W 20 MAR 74

