

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC  
FTDIST  
0

## REVISIONS

| P | LTR | DESCRIPTION                                 | DATE      | DWN | APVD |
|---|-----|---|-----------|-----|------|
|   | B1  | OBSOLETE PART NUMBERS 15 POSITION AND ABOVE | 09APR2015 | CR  | PS   |

## MATERIAL:

HOUSING: THERMOPLASTIC PA, UL94V-0, BLACK.  
 TERMINAL: BRIGHT TIN PLATED, COPPER ALLOY.  
 SCREW: 6-32, STEEL, ZINC PLATED, CLEAR CHROMATE.




## ELECTRICAL:

UL CLASS C: 20A, 150V.  
 UL CLASS D: 10A, 300V.  
 CSA TYPE B: 20A, 300V.  
 CSA TYPE C: 20A, 300V.  
 CSA TYPE D: 10A, 300V.  
 CSA TYPE E: 20A, 300V.  
 WIRE RANGE: 12-22 AWG.

## MECHANICAL:

RECOMMENDED TORQUE RATING: 7 IN-LBS.  
 RUNNING TORQUE: 0.5-3.5 IN-LBS UNLESS OTHERWISE STATED.

 OBSOLETE PARTS.

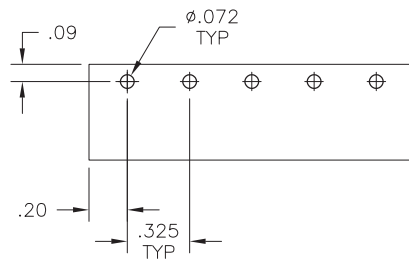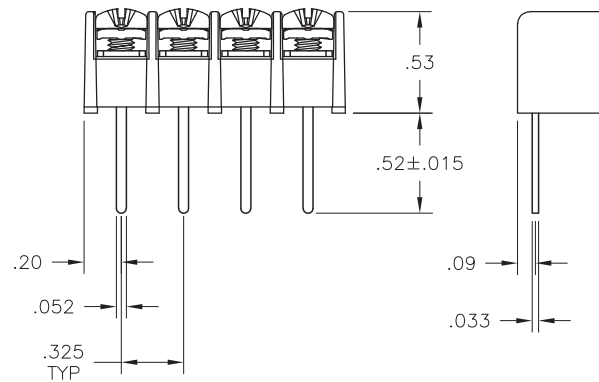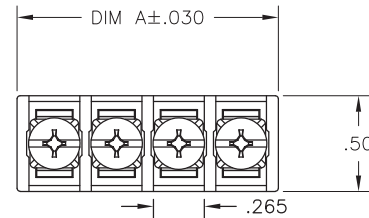

RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S SCHLEGEL 5/17/04  
 CHK S YODER 5/07/04  
 APVD S YODER 5/17/04

 TE Connectivity

DIMENSIONS:  
INCHESTOLERANCES UNLESS  
OTHERWISE SPECIFIED:

0 PLC ± -  
 1 PLC ± -  
 2 PLC ± .01  
 3 PLC ± .005  
 4 PLC ± -  
 ANGLES ± 2'

MATERIAL

FINISH

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

4DB SERIES

W108 STYLE

-

A3

00779

C=8-1437667-6

SCALE






























NTS

SHEET

1 OF 1

REV

B1

|   |       |    |             |                        |
|---|-------|----|-------------|------------------------|
|    | 9.815 | 30 | 4DB-W108-30 | <del>3-1546444-0</del> |
|    | 9.490 | 29 | 4DB-W108-29 | <del>2-1546444-9</del> |
|    | 9.165 | 28 | 4DB-W108-28 | <del>2-1546444-8</del> |
|    | 8.840 | 27 | 4DB-W108-27 | <del>2-1546444-7</del> |
|    | 8.515 | 26 | 4DB-W108-26 | <del>2-1546444-6</del> |
|    | 8.190 | 25 | 4DB-W108-25 | <del>2-1546444-5</del> |
|    | 7.865 | 24 | 4DB-W108-24 | <del>2-1546444-4</del> |
|    | 7.540 | 23 | 4DB-W108-23 | <del>2-1546444-3</del> |
|    | 7.215 | 22 | 4DB-W108-22 | <del>2-1546444-2</del> |
|    | 6.890 | 21 | 4DB-W108-21 | <del>2-1546444-1</del> |
|    | 6.565 | 20 | 4DB-W108-20 | <del>8-1437667-9</del> |
|    | 6.240 | 19 | 4DB-W108-19 | <del>1-1546444-9</del> |
|    | 5.915 | 18 | 4DB-W108-18 | <del>8-1437667-8</del> |
|    | 5.590 | 17 | 4DB-W108-17 | <del>1-1546444-7</del> |
|    | 5.265 | 16 | 4DB-W108-16 | <del>1-1546444-6</del> |
|    | 4.940 | 15 | 4DB-W108-15 | <del>1-1546444-5</del> |
|    | 4.615 | 14 | 4DB-W108-14 | <del>1-1546444-4</del> |
|    | 4.290 | 13 | 4DB-W108-13 | <del>1-1546444-3</del> |
|    | 3.965 | 12 | 4DB-W108-12 | <del>8-1437667-7</del> |
|    | 3.640 | 11 | 4DB-W108-11 | <del>1-1546444-1</del> |
|    | 3.315 | 10 | 4DB-W108-10 | <del>1-1546444-0</del> |
|   | 2.990 | 9  | 4DB-W108-09 | 1546444-9              |
|  | 2.665 | 8  | 4DB-W108-08 | 1546444-8              |
|  | 2.340 | 7  | 4DB-W108-07 | 796658-1               |
|  | 2.015 | 6  | 4DB-W108-06 | <del>8-1437667-6</del> |
|  | 1.690 | 5  | 4DB-W108-05 | 1546444-5              |
|  | 1.365 | 4  | 4DB-W108-04 | 1546444-4              |
|  | 1.040 | 3  | 4DB-W108-03 | 796988-1               |
|  | .715  | 2  | 4DB-W108-02 | 1546444-2              |

DIM  
ANO.  
OF  
POS.CATALOG  
NUMBERTE  
PART NO.