


114030A05MXXX

LENGTH
010 - 1M
050 - 5M
200 - 20M

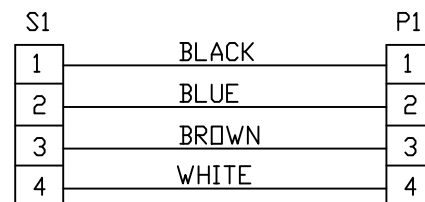

WIRING DIAGRAM

NOTES:
MECHANICAL
CONTACT : GOLD/NICKEL OVER COPPER ALLOY
INSERT : YELLOW PVC
COUPLING NUT: BLACK ELECTROPHORETIC COATING OVER ZINC DIECAST
MOLDED BODY: YELLOW PVC
CABLE: 18 AWG 4 CONDUCTORS YELLOW PVC JACKET
WRAP LABEL: YELLOW VINYL

ELECTRICAL
VOLTAGE RATING: 300V AC/DC
AMPERAGE: 7A

ENVIRONMENTAL
OPERATION TEMP: 80°C

INITIAL RELEASE EC NO: IPG2013-1205 DRWN: BARDEN 2013/02/06 CHKD: TWOLDEGE APPR: JFMURPHY 2013/06/21	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH ONLY		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		▽=0 ∇=0	mm	INCH	DRAWN BY	DATE	TITLE	MINI CHANGE ASSEMBLY 4 POLE MALE/FEMALE ST/ST 18/4C AWG PVC YELLOW MOLEX INCORPORATED			
		4 PLACES ±---	±---	BARDEN	2013/02/06	CHECKED BY	DATE				
		3 PLACES ±---	±.005	TWOLDEGE	2013/02/15	APPROVED BY	DATE	SD-130010-026 SHEET NO. 1 OF 1			
2 PLACES ±0.13	±.010	JFMURPHY	2013/06/21	MATERIAL NO.	---						
1 PLACE ±0.25	±.020	ANGULAR ±.5°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					