

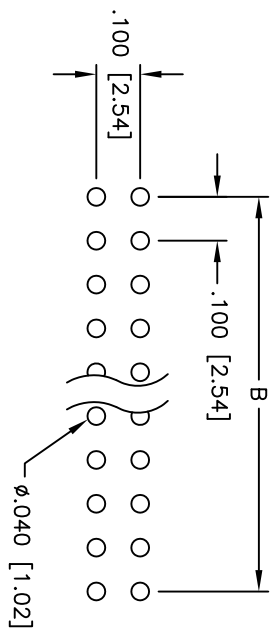
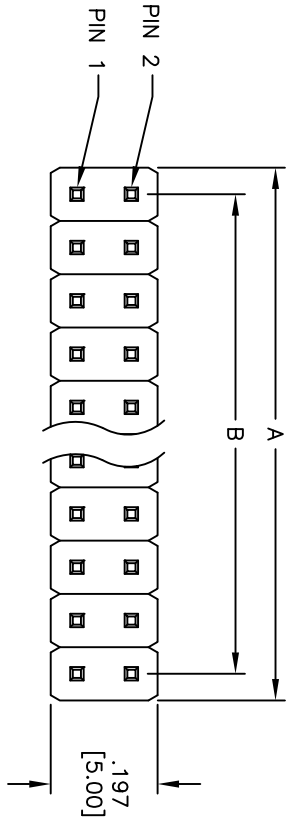


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/4/05	

APPROVED: _____
 DATE: _____ TITLE: _____

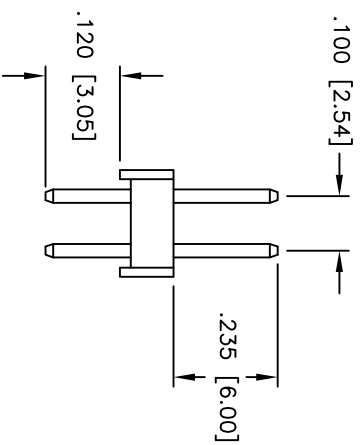

PCB LAYOUT

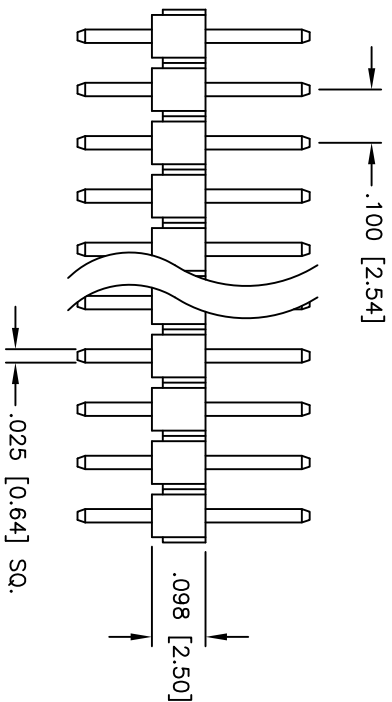

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold flash over Nickel underplate overall
 Electrical: Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant

Positions: 2 thru 80
 A = .100 [2.54] x No. of Positions per Row
 B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

.100 [2.54] DUAL ROW PIN HEADER
GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TITLE	
TOLERANCES: EXCEPT AS NOTED		.100 [2.54] DUAL ROW PIN HEADER	
INCHES		GOLD PLATED	
.X ± .10	ØXX ± .10	SIZE	PART NO.
.XX ± .020	ØXXX ± .015	X	PH2-XX-UA
.XXX ± .015	ØXXX ± .010	CHECKED	REV.
APPROVALS	DATE	APPROVED	
DRAWN	SS	4/4/05	
CHECKED			
APPROVED			
SCALE: NTS		SHEET 1 OF 1	

