


± I	Q	н г	m	0

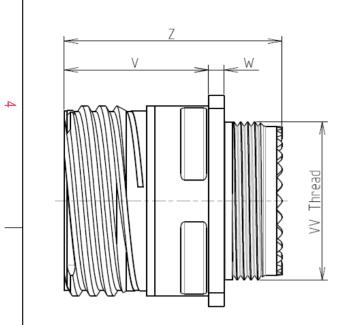

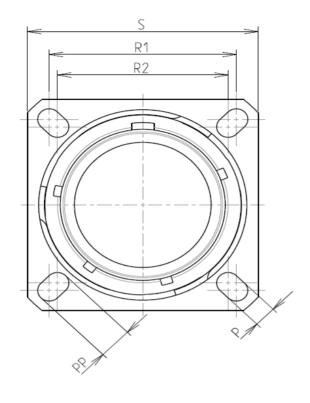



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 09

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray -Mass : 9.15 g ± 10%

8D 0

G

09

F

98

Ρ

F

Е

Р	3.25±0.2
	5.2520.2
PP	5.49±0.2
R1	18.26
R2	15.09
S	23.8±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
/V THREAD	M12x1-6g


ORIENTATION : E

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 09-98

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

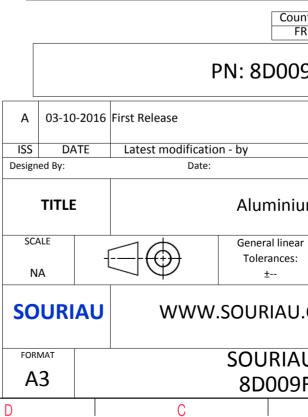

	Φ		A		
ſ					4
AS EXAMP	PLE				3
s which do er of the F	oes not co Parties or k echnical n Jurisd	by a third par	ty		2
				MOD N°	
J.CON	CUSTOMER DRAWING Receptacle 8D series NPRDS / PROJECT 859 This document is the property of				
	B		А		J

		G	г	m	D	0	
		Contact Layout				P	anel Cutou
4	-X <u></u>	€ • • • • • • • • • • • • •			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Contai positio ID A B C C Shell Arrangement Numb size no. 9 -98 3	X_axis Y_axis (mm) (mm) + 065 (1.65) + 0.38 (0.97) + 000 (0.00) - 0.75 (1.91) - 0.65 (1.65) + 0.38 (0.97)				ØA.	ØT_
ى						Dim ØA ØAA R1 ØT	
	L						
						SOURIAU shall not be lia due to a use of the P the Specifications issued b (professional reco	roducts wh by either of
N						PN: 8	
					A 03-10-20	016 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE		ıminium
					SCALE NA		eral linear erances: ±
					SOURIA	U WWW.SOU	RIAU.C
					FORMAT A3		JRIAU D009F9
	Н	G	F	E	D	С	

