




**Note:**

ABS Temperature rating: 0°C ~+80°C  
 Silicon temperature rating: -35°C ~+116°C

THIS IS A C.A.D. GENERATED DRAWING  
 DO NOT MAKE MANUAL REVISIONS TO MASTER



ISSUE NUMBER	
ORIGINAL	<input type="radio"/>
ADD NOTE ADD ø7.80	
P.M. JUL. 2/2020	<input type="radio"/>

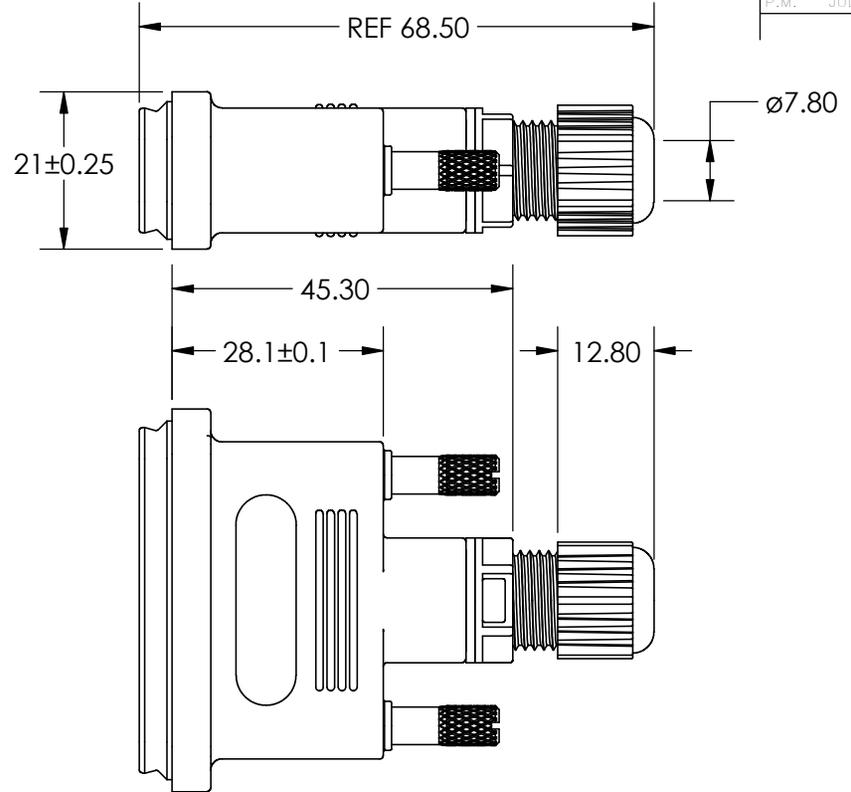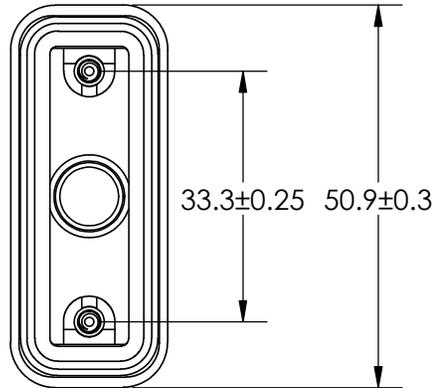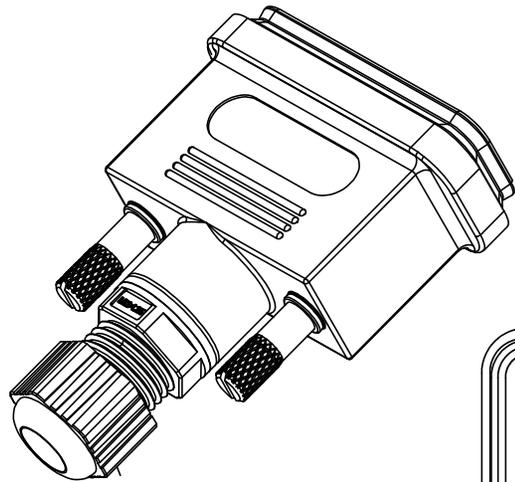

**Materials and Finish**

1. Housing: ABS, UL94V-0, Black
2. Gasket: Silicon, Black
3. O-Ring: Silicon, Black
4. Screw: Brass, Nickel Plated
5. Body Nut: ZYTEL, Black
6. Seal: Silicon, Black
7. Pressure Washer: Silicon, Black
8. Sealing Nut: ZYTEL, Black

DEGREE OF PROTECTION: IP67 AS PER IEC60529



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

<b>Standard Density Waterproof D-Sub Connector BACKSHELL</b> 627-230-015-010		ACAD REFERENCE NO. 627-230-015-010	
DRAWN: R.STA.MONICA		DATE: June.4/13	
CHECKED:		DATE:	
SCALE: NTS		SHEET 1 OF 1	
DRAWING NUMBER 627-230-015-010		ISSUE 2	



EDAC INC  
 TORONTO, ONTARIO  
 CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.